# AN EVALUATION OF DIGITIZER—NON—METRIC CAMERA SYSTEM IN CLOSE—RANGE PHOTOGRAMMETRY

A   Thesis Submitted
In  Partial  Fulfilment  of  the  Requirements
for  the  Degree  of

## MASTER OF TECHNOLOGY

ʰ.01ʰ01

by

### S. SUBRAMANYA

*to the*

DEPARTMENT OF CIVIL ENGINEERING

## INDIAN INSTITUTE OF TECHNOLOGY KANPUR
APRIL, 1988

## CERTIFICATE

This is to certify that the thesis entitled, "AN EVALUATION OF DIGITIZER - NON-METRIC CAMERA SYSTEM IN CLOSE-RANGE PHOTOGRAMMETRY" submitted by Shri S.Subramanya in partial fulfilment of the requirements for the degree of Master of Technology, at the Indian Institute of Technology, Kanpur, is a record of bonafide research work carried by him under my supervision and guidance. The work embodied in this thesis has not been submitted elsewhere for a degree.

April, 1988.

(IQBAL SIDDIQUI)
Visiting Faculty
Department of Civil Engineering
Indian Institute of Technology
Kanpur

# ACKNOWLEDGEMENTS

I am indebted to,

- The Director of Technical Education, Government of Karnataka.

- The Principal, NIE, Mysore.

- Professor and Head, Department of Civil Engineering, NIE, Mysore

for deputing me to follow M.Tech. under QIP.

I heartily appreciate the talented typing of Mr. U.S. Mishra and the tidy drawing work of Mr. Bajpai.

Finally a special recognition is due to my wife Shailaja and daughter Shruthi, who provided many months of patient encouragement, while enduring inattention.

<div align="right">-Subramanya</div>

# CONTENTS

## LIST OF TABLES

## LIST OF FIGURES

LIST OF PLATES

# ABSTRACT

Immense cost of the equipment, incapability of smaller sized organisations to own them, has resulted in a great search for inexpensive and easily available photogrammetric equipment and methods. This has led to the discovery of the use of Amateaur cameras in place of Costlier Metric Cameras for photography. Yet the photogrammetric machines such as the comparators used for measuring coordinates of the image points remain the expensive component of the system.

An attempt has been hereby made to evaluate the photogrammetric potentials of an inexpensive Nonmetric camera – Tablet digitizer combination. Both are cheaply and easily available. Further they can be made use of for many other purposes other than photogrammetry.

Camera-enlarger system was calibrated using a target field prepared in the laboratory. Calibration results indicated the influence of the enlarger lens distortion characteristics. No significant change was found from exposure to exposure. Principal point off-sets were negligibly small. The RMS values of the check points (8.6 microns, 7.3 microns and 2.136/1000 in X, Y and Z directions respectively) indicated that this inexpensive system can give comparable results with any of the photogrammetric machines. Experiments in Graphics indicated a great potential of the system in mapping objects by contouring.

# INTRODUCTION

Photogrammetry is derived from three Greek words namely,

Photos - light

Gramma - drawn

Metron - to measure

-meaning drawing and measuring with the help of light rays. Manual of photogrammetry defines photogrammetry as the art, science and technology of obtaining reliable information about physical objects and environment through the processes of Recording, Measuring and Interpreting images and patterns of Electromagnetic radiant energy and other phenomena.

Recording is accomplished by the use of a camera by a process called photography. The product of photography is a photograph. Depending upon the purpose, photography may be Terrestrial, Aerial or Orbital. A variety of photo-grammetric machines are available for recording, measuring and plotting in the form of photogrammetric cameras, comparators and plotters, whose precision, complexity and hence the cost depends upon the application for which they are made. Inter-pretation is descriptive and hence outside the scope of this work.

Close-range photogrammetry is a branch of photo-grammetry where the object-to-camera, distances are less than 300 meters. It encompasses Industrial photogrammetry, Architectural photogrammetry and Biostereometrics .

Close-range photogrammetry, also called as non-topographical photogrammetry is associated with such diversified fields as Animal husbandry, Architecture, Archeology, Bacteriology, Criminology, Deformation of objects, Hydraulics, Marine structures, Geology, Geotechnical Engineering, Nuclear Physics, Aerodynamics, Ship building, Antennae Measurements, Medicine, Dentistry, Material science etc. The reasons for such a wide range of applications being.

1. It is the only non-contact method and through a choice of supplementary measurements the need for the direct contact with the object being analysed can be avoided.

2. The photographic document is available for second thought measurements at a later stage of photogrammetry.

3. A single picture taken represents measuring infinite number of horizontal and vertical angles from the same station with a theodolite. Thus the field work is reduced to a minimum.

4. Measurement on prototype is very difficult in the case of modern buildings and structures because of the complexity of design. Photogrammetry can be used under such circumstances

5. Photogrammetric methods do not obstruct the normal functioning of the structure being analysed.

6. Measurements can be made up to the very end. i.e. until the failure of a structure, for example.

7. It can be the best way and perhaps the only way to measure

   (a) Irregular shapes

   (b) Moving shapes

   (c) Inflated shapes

   (d) Objects that are too cold, too hot, too delicate, too soft, too inaccessible, too toxic and too radioactive to touch.

This wide range of applications of close-range photogrammetry calls for a wide variety of photogrammetric machines, and it is not economically justifiable for the manufacturers of such machines to offer as many different types of machinery as would be necessary to cover the wide spectrum of requirements of various applications.

Even the available equipment for photogrammetric work are very costly. The cost increases in direct proportion with the precision of the machines. Very precise machines are required since the object space distances are scaled down in photography and any error or inaccuracy crept in is magnified many a folds resulting in totally erroneous results which may become useless to the user community.

Photogrammetric techniques of working require the taking of atleast two overlapping photographs, through a camera of

known inner orientation (i.e. having a knowledge of the Fiducial marks and the Calibrated Focal Length). Such photographs when viewed stereoscopically depict a three dimensional model of the photographed object space. The knowledge of the inner orientation parameters permits the fixing of origin and a datum with reference to which the three dimensional measurements may be obtained.

A precise camera with exactly known inner orientation requires a sophisticated assemblage. Thus in order to have a camera with metric qualities very expensive set up is needed which is beyond the reach of small sized organisations. Not only the camera, but also the photogrammetric machine in which the said overlapping photographs are to be inserted to obtain the three dimensional model are equally expensive.

A combination of such camera-photogrammetric machine set-up may cost many hundred thousands of rupees to acquire. This is beyond the reach of many organizations and inspite of knowing the vast potential of its capabilities, particularly due to cost factor and then due to lack of trained man power, such versatile techniques as offered by photogrammetric techniques have not been able to become popular, except in topographic mapping, generally done by National Organizations.

Non-metric or simply Amateaur cameras are not the cameras especially made for the photogrammetric purposes. They have

certain advantages and disadvantages as compared to metric cameras which are especially made for photogrammetric purposes. Hence to obtain measurements from them is difficult and not as accurate as desired. Research is still continuing to find practical methods of using Non-metric cameras for metric purposes. Combination of methods with analytical techniques of photogrammetric solutions has gained popularity in recent years. But most investigations centre around the comparators and the analytical plotters.

A modest effort has been made through this investigation, to evaluate, if a comparatively very inexpensive set-up of an ordinary Amateaur Camera - Digitizer combination can substitute the well established combination of metric camera - photogrammetric machines. If this combination can be made effective it is felt that it will provide a considerable break through in overcoming the need of expensive photogrammetric machines for mapping purposes, due to the advantage that microcomputers and digitizers are easily and cheaply available, and when acquired by moderately sized organizations, can be made use of for various other purposes, apart from the listed use of mapping as is prevailant with metric camera-photogrammetric machine combination. The amateaur cameras which are inexpensive are also easily available, in flexible ranges of focal lengths and are easier to handle and transport apart from the fact that photography with them is far less complicated than with metric photogrammetric cameras.

However amateaur cameras and cartographic Tablet digitizers have their own limitations. In amateaur cameras the lenses are designed for higher resolution at the expense of distortion. In these the inner orientation is also unstable. Further they lack the Fiducial marks ,level bubbles, orientation provisions and the film flattening device. The resolution of a cartographic Tablet digitizer is too low and hence cannot be used in the case of very small scale photography. Also continuous mapping is not possible.

It is due to such inherent inaccuracies of the equipment, that very high accuracy may not be expected in comparison to the most sophisticated photogrammetric machines and methods. But this study will establish the possibly achievable accuracy. It is nevertheless expected that this method should provide a highly cost effective and comparitively accurate system of mapping with the help of discretely co-ordinated points.

# LITERATURE REVIEW

## Photogrammetric Potentials of Non-metric Cameras

Photogrammetry is general has a long and interesting history which starts from as early as 350 B.C. (Wolf, 1985; Gruner, 1977). However many discoveries were made and the use of non-metric cameras for close-range applications became popular during 1970's and 1980's (Kennert et al 1976; Karara, 1985).

Number of experiments conducted during the above period have proved that non-metric camera can be used for photogrammetric purposes, provided that the camera is appropriately calibrated, sufficient object space control is used and analytical methods are used for data reduction. A method particularly suitable for non-metric photogrammetry has been suggested (Karara, 1972) in which the comparator co-ordinates are directly transformed into the object space co-ordinates without the intermediary step of transforming them into photo-coordinates. Thus the fiducial marks are not necessary. These 'Direct Linear Transformation' equations do not require linearisation and hence economical as regards the computer time.

In an attempt to evaluate four non-metric cameras and one metric camera an updated version of Direct Linear Transformation (DLT) has been used which includes six models of image refinement (Karara et al, 1974). Experiments have proved

that the model for image refinement, for nonmetric cameras, of the following form will be quite appropriate and sufficient.

$$\Delta x = a_1 + a_2 x + a_3 y + \bar{x} k r^2$$

$$\Delta y = a_4 + a_5 x + a_6 y + \bar{y} k r^2$$

$\Delta x, \Delta y$ = Image refinemen parameters

where x and y are image coordinates, $\bar{x} = x - x_s$ and $\bar{y} = y - y_s$ where $x_s$ and $y_s$ are the image coordinates of the principal point, $r = (x^2 + y^2)^{1/2}$, $a_1, a_2$ etc. Film deformation coefficients, $K_1$ is lens distortion coefficient.

Experiments conducted on seven metric cameras to determine the tolerances for the principal point and the principal distance Lens distortions, Model accuracy and Reproducibility of the elements of inner orientation have proved that the difference between the accuracies of metric and non-metric cameras are very less and the accuracy parameters do not depend upon whether a camera is metric or non-metric but depend upon the cone angle (Kolbl, 1976). If smaller cone angles and analytical methods are used non-metric cameras can be used with almost the same precision as that of metric cameras. The predictor formula for accuracy proves beyond doubt that the best non-metric cameras can be compared to metric cameras as regards the accuracy (Hottier, 1976).

## Calibration of Non-metric Cameras

It is evident from the above discussion that non-metric cameras have great potentials once they are calibrated. Thus

calibration becomes a 'Link' between nonmetric and metric cameras. Many methods have been developed for the calibration of nonmetric cameras. Even though partial calibration is some times used self and on the job calibrations or more popular, because of the instability of the inner orientation of nonmetric cameras. Instability of a nonmetric camera can be determined by using statistical methods (Nasu et al, 1976).

Amongst the partial calibration methods which uses a target field the "Analytical Plumb Line Method' developed by Brown is worth mentioning. The straightness or the lack of straightness of the plumbline can be used analytically to determine the inner orientation of both metric and nonmetric cameras (Brown, 1971). But in close-range photogrammetry often the object-to-camera distances on too small, or in other words the scales are too large. This creates a problem as it is very difficult to set the control points in the object space to the required accuracy. Partial and even on-the-job methods cannot be used under such circumstances and the self calibration method becomes inevitable (Faig, 1975). Using collinearity and coplanarity conditions self calibration method can be used which does not require control points as such.

One of the major disadvantages of a nonmetric camera as has been pointed out earlier is the lack of Fiducial marks. The fiducial marks are either to be introduced (Schmutter et al., 1970) or the methods that do not require Fiducial marks are to be used. Attempts have been made with reasonably

accurate results, to use the corners of the film format
as fiducial marks (Goodrich, 1985). In one such attempt
(Hatzopoulos, 1985), several points have been measured
along the edges and then their intersection found out
computationally. In Hatzopoulos's work olympus OM-2N 35 mm
camera has thus been calibrated using DLT approach and
Finite Element Method. A combination of the above calibration
method and least squares bundle adjustment has given an
accuracy of 1 in 7000 of the largest dimension of a building,
which has been taken as an example.

Of late, the Finite Element Method, which is being used
so extensively in other fields such as structural analysis etc.
is finding its use in close-range photogrammetry also (Halim,
Munjy, 1986a). In this method the entire image area is divided
into a number of subdomains. Each sub-domain is considered to
have a different Focal Length (Halim, Munjy, 1986b), thus
eliminating the assumption that the distortions are uniform
over the entire image area. Experimental results have shown
that this method gives a good representation of systematic
errors in analytical photogrammetry. It reduces the effects
of film unflatness, which is a major source of error in non-
metric cameras.

From a study of the literature it is found that many
of the analytical approaches towards camera calibration of
non-metric cameras, revolve around the projective equations in
one form or the other, which form a most powerful tool in

analytical photogrammetry (Ghosh, 1979, Wolf, 1985; Methley, 1986; Rampal, 1987). Most of the methods involve compensation of systematic image co-ordinate errors by analytical models, incorporated into the photogrammetric projective equations. The parameters defining systematic errors are then recovered simultaneously with other projective parameters in a least square adjustment. But the self calibration method using Finite Element Method has certainly distinct advantages over other methods.

## Film for Non-metric Cameras

Specially made optically flat glass plate coated with emulsion is the most geometrically stable imaging surface. However glass plates are heavy, cumbersome and difficult to store and handle. Thus films are becoming more and more popular. On an average,film has twice the coefficient of thermal expansion as compared to glass. The geometrical stability of a film depends upon the thickness of the base material and the emulsion. Thicker the base material, thinner the emulsion,higher will be the geometrical stability.

Smaller format cameras are becoming increasingly popular, for the ease they provide in handling and also for their distinct advantages they have over larger formats (Clegg,1975). As the non-metric cameras lack film flattening device the film distortion may be very high. Experiments conducted in this direction have shown that in nonmetric cameras with mechanical film flattening the deviation may be as high as 25-30 microns (Meier, 1978). Also when the films are processed

and stored in the commercial way the shrinkage will vary depending upon the processes involved (Abdel Aziz, 1975), Measurements on 35 mm film negatives can be made only with a precise comparator which can measure up to one micron. When comparators are not available other methods have to be adopted such as micrometer vernier scales (Janke, 1972) or cartographic distizers (Welch et al., 1983; Oimoen, 1987). Since the resolution is poor these cannot be used on a 35 mm negative and this 35 mm film is to be enlarged and projection printed on either lithe film or Bromide paper. This enlargement introduces additional errors (Needham et al. 1984) to aggravate the situation.

## Some Practical Examples of the Application of Non-metric Cameras

As has been pointed out earlier non-metric close-range photogrammetry has a very wide range of applications. Since the camera can be hand held and oriented in any direction, it provides greater manouveribility. This is very much essential in the case of Architectural Photogrammetry since the approaches to architectural buildings and monuments are quite narrow and the elbow room is quite less. Sometimes the photographs have to be taken through the windows of the adjacent buildings or from roof tops (Schmutter et al 1970). Many examples can be found in literature. One such example is the use of a Rollei - Nonmetric camera with a 6 cms x 6 cms format, and using a roll film to map architectural buildings in Stockholm.

A glass plate with fiducial marks was inserted at the back
of the camera which also served as a pressure plate. Analy-
tical method employed, the plotting technique used and the
difficulties involved in architectural photogrammetry have
been fully described.  It is not always necessary to have very
complicated equipment for these purposes.  Simple laboratory
fabricated equipment can be effectively used to make measurements
on   photographs (Janke, 1972).

Mines, Glaciers, Hilly terrains pose a different type of
problem even though the result is the same.  The hazardous
nature of the above precludes the use of conventional methods
of mapping, or even the use of a metric camera which invariably
is heavy along with the other supporting equipment.  Manouveri-
bility and the speed are the prime factors in these cases and
the hand held non-metric camera is best suited for this.  Thus
there is an example of the use of Yashika Model 'C' camera with
a format of 55 x 55 mm and Canon 35 mm camera for mapping
geological fractures and predicting the roof fall of Herrin
No. 6 Coal Member in Illinois (Branden et al. 1976).  DLT
approach has been used for data reduction.  Measurements were
made on the original negatives using STK stereocomparator.
The paper gives details about the analytical method used
and results of the measurement of dip etc.

Similarly an Olyppus OM-1 35 mm camera has been used for Glacier measurements in Sir Sanford range of Selkirk mountains, British Columbia (Goodrich, 1982). As the Glacier was totally inaccessible it was not possible to set the targets on the Glacier and some points that were already available were selected as control points. Since the accuracy required was very less (one foot) a calibrated parallax bar was used for measurements. Details of the camera calibration using the corners of window frames of a building which crossed the film format diagonally as targets, testing of the calibration of the camera using three dimensional field,are given.

Another example is the use of a Honey well Pentax spotmatic 35 mm SLR camera for photography and an Altek digitizer for co-ordinate measurement (Welch et al. 1983), for monitoring the channel erosion of Lampkin Branch, before and after a storm. Photographs were taken from a 9.5m high platform and with a camera base of 3.81 m, overlap 70% and with a Base/Depth ratio of 0.40. Average scale of the photography was 1:440 and hence the use of Altek AC 90 SM super micro digitizing system with a resolution of 25 microns gave quite acceptable results.

The above are but a few pointers to indicate the high
photogrammetric potentials of non-metric cameras. Time
and space do not permit the venture of going into deeper
details. But it is felt that the above few examples bring
out the tremendous advantages of a non-metric camera for
recording purposes.

# STATEMENT OF THE PROBLEM

## III-1  INTRODUCTION

Study of photogrammetric potentials of non-metric cameras has been a topic of great interest to photogrammetrists world over for a long time. From time to time valuable studies have been performed but the method doesn't seem to have yet been standardised. There is found to be greater inclination of the photogrammetrists to try and find ways through which the fiducial marks may be introduced in simple photographic cameras to make them worthy of providing a co-ordinate system for measurement on the photographs.

Providing of fiducial marks to ordinary cameras is not an easy task. It may on the one hand not provide enough accuracy and on the other develop other complications due to tampering with the delicate camera assembly.

The recent trend therefore is to find ways to work without the fiducial marks in such cameras. Various research work has thus been published which deals with the combination of simple non-metric cameras and expensive photogrammetric machines. Since the photogrammetric machines remain the expensive component of the system, there still is the

reluctance on the part of scientists and photogrammetrists in small sized organisations to adopt to this method.

If there would be a system which is indigenously and easily available and can work as substitute to the above combination then it is expected that it will provide a very interesting, useful and inexpensive combination of resources.

## III-2 OBJECTIVE OF THE THESIS

The objective of this thesis is therefore to evaluate the photogrammetric potentials of a 35 mm SLR Non-metric camera in conjunction with a digitizer attached to a micro-computer.

The aim of the work is to be able to establish a very inexpensive system which should be able to work as a substitute to extremely expensive set-up of metric camera and photogrammetric machines. Such a system can be easily acquired by any moderate sized organisation which may find this technique extremely handy method of mapping and measuring.

During the process of working, the 35 mm photographs have been enlarged by about 4.66 times through the already available Belvish photographic enlarger. For mapping purposes the Tectronix graphic system coupled to a Hewlett packard plotter would be utilised.

The work will be carried out in three distinct phases, viz.

1. Calibration of the camera-enlarger system.

2. _perApw_ Transformation of photo-coordinates which reference to the terrestrial control points and finding discrepancies over the check points.

3. Making use of available graphic programs and system capabilities for mapping and contouring an object.

The work is performed with particular reference to the close-range application of photogrammetry, but if successful the same concept and procedure can be extended to various other types of aerial and terrestrial photographs.

## III-3  CALIBRATION OF CAMERA

Prior to use a camera is to be calibrated to determine some constants of the camera called "Elements of Inner Orientation". This is necessary for accurate data acquisition from the photographs.

For reliable photogrammetric measurements, there should be an exact correspondence between the light rays that enter the camera and the light rays that leave the lens to produce images on the focal plane. Thus the object of camera calibration is to determine the deviation of the image bundle so that corrections may be applied to the image bundle to get reliable information.

Following assumptions are made:

1.      Photograph is a perspective projection, meaning
        that all the light rays entering the camera meet
        at a single point called the Exterior perspective
        centre.

2.      The light rays entering the camera are straightlines,
        meaning that there is no refraction effect on the
        light rays.  In the present case since the object
        to camera distances are very small the refraction
        effect has been neglected.

3.      All the light rays from the lens leave from a single
        point called the Interior perspective centre, to
        produce image.  The distance between the Interior
        perspective centre and the focal plane is called the
        Focal length of the camera.

        Principal point is the foot of the perpendicular from
the interior perspective centre of the lens to the focal plane.
Principal point is also defined as the point where the camera
axis meets the image plane.

        Following are the elements of inner orientation:

1.      Equivalent Focal Length (EFL):  Focal length
        which is effective near the centre of the camera
        lens where the distortions are minimum.

2.      Calibrated Focal Length (CFL):  Focal length which
        produces an overall mean distribution of  radial
        distortion.

3. Average radial lens distortion (dr): Distortion in image position along radial lines from the principal point.

4. Tangential lens distortion: Distortion in image position perpendicular to radial lines from the principal point. Since this distortion is very small compared to radial lens distortion this has been neglected in the present study (Wolf, 1985).

5. Principal point location: Co-ordinates of the principal point with respect to the x and y Fiducial axes. Although during manufacture of the camera care is taken to see that the principal point is exactly at the intersection of the Fiducial lines in metric cameras and at the centre of the format in non-metric cameras, usually there will be a little deviation from this condition.

6. Angle of intersection of Fiducial lines: This angle should be $90^\circ \pm 1'$ (Wolf, 1985).

To determine the above elements of inner orientation for a non-metric camera a number of methods are available which can be broadly classified into three groups (Kennert et al 1976).

1. Partial Calibration: This is usually performed in a laboratory using a test field or a target array. The selection of the number of parameters depends upon the accuracy required. The method is called partial since it does not consider the instability of the

elements of inner orientation.

?.   On the Job Calibration utilises the photography taken
of the object and the object space control simultaneously.
Atleast one space control point (X, Y, Z) is required
for every two unknown quantities included in the solution.
Basically this makes use of the collinearity condition
equations. Collinearity condition states that the
object point, exposure station of any photograph and the
photo image of the object point all lie on straight line.

Basic collinearity equations are

$$x_a = -f\left[\frac{m_{11}(X_A-X_L)+m_{12}(Y_A-Y_L)+m_{13}(Z_A-Z_L)}{m_{31}(X_A-X_L)+m_{32}(Y_A-Y_L)+m_{33}(Z_A-Z_L)}\right]$$

$$Y_a = -f\left[\frac{m_{21}(X_A-X_L)+m_{22}(Y_A-Y_L)+m_{23}(Z_A-Z_L)}{m_{31}(X_A-X_L)+m_{32}(Y_A-Y_L)+m_{33}(Z_A-Z_L)}\right]$$

where

$x_a, Y_a$ = x and y coordinates of the image point in the
photocoordinate system

$X_A, Y_A, Z_A$ = X,Y,Z co-ordinates of the object point A

$X_L, Y_L, Z_L$ = X,Y,Z co-ordinates of the exposure station.

$m_{11} \cdots m_{33}$ = Transformation coefficients which contain the
rotational elements of the exposure station
namely k, Ø and u .

For more details Appendix C may be referred.

3.    Self-calibration:    This differs from the above two
methods in that it does not require object space control
points as such for calibration.  Three or more convergent
photographs are taken and using the collinearity condition
and well established object points the elements of
interior orientation are determined.

Since the object of the present study is to evaluate
the performance of non-metric camera-digitizer system and not
the investigation of various camera calibration methods, the
partial calibration method, which is comparatively simple, is
used to calibrate the non-metric camera/camera enlarger system
used in this experiment.

III-3.1 PROCEDURE ADOPTED FOR CAMERA CALIBRATION:

The target array used for calibration is shown in
Fig. IV-1.  The details of the experiment conducted including
the description are given in Chapter Iv.

Since the above method is similar to the multicolli-
mator method of camera calibration the central target mark
image will herein be called the point of autocollimation.
Because of the defects in the manufacture of non-metric cameras
the optical axis of the camera may not meet the image plane
exactly at this point, i.e. autocollimation.  In other words
the principal point and the point of autocollimation may not
exactly coincide.  This creates a problem in defining the origin

for measuring the co-ordinates of other target point images on the photograph. Hence for the co-ordinate measurement the point of autocollimation is considered as the origin (Karren, 1968).

III-3.2    ELEMENTS OF INTERIOR ORIENTATION

III-3.2.1 EQUIVALENT FOCAL LENGTH  (EFL)

With reference to Fig. IV-1 if FG, FP, FQ and FE are the measured radial distances (r) around the point of autocollimation and along the four diagonals then

$$EFL = \frac{FG + FP + FQ + FE}{4 \tan\theta}$$

where 'θ' is the angle to the corresponding points (G,P,Q,E) subtended at the Exterior perspective centre of the camera. Thus,

$$EFL = \frac{\text{Average radial distance}}{\tan\theta}$$

The above is the condition when the points G, P, Q and E are equal angle points. But if the points are not equal angle points, then an average value for 'θ' is to be used in calculating EFL.

III-3.2.2    RADIAL LENS DISTORTION BASED UPON EFL:

Thus the radial distances to all the target point images can be measured on the photograph from the point of

autocollimation. These are called the measured radial distances. But at this stage since we know a value for the focal length (EFL) the theoretical radial distances to all the target point images can be determined using the relation

Theoretical radial distance = EFL x tan $\theta$

where '$\theta$' is the corresponding angle. Thus two radial distances are obtained for a point; measured radial distance and the theoretical radial distance. If the lens is completely distortion free then these values will be the same. But since no lens is completely distortion free these two will not be equal. The difference between the measured and the theoretical radial distances is called the Radial lens distortion.

∴ Radial lens distortion = Measured radial distance − Theoretical radial distance.

Radial lens distortion may be positive or negative depending upon the numerical values of the measured and theoretical radial distances.

From the above discussion it is clear that the radial lens distortion values change with the focal length used. Different focal lengths give different radial lens distortion characteristics.

## III-3.2.3  CALIBRATED FOCAL LENGTH:

This is the Focal length which produces an overall mean distribution of the radial lens distortion. This can be obtained by equating the maximum positive radial lens distortion to maximum negative radial lens distortion.

For example if the maximum positive distortion occurs at a measured radial distance $r_1$ and at an angle $\theta_1$ and the maximum negative distortion occurs at a measured radial distance $r_2$ at a corresponding angle $\theta_2$, then CFL can be determined by equating these two in the following manner:

$$r_1 - CFL \tan \theta_1 + r_2 - CFL \tan \theta_2 = 0$$

Radial lens distortion based upon CFL can thus be determined as in III-3.2.2. These distortions can be plotted against the radial distance to give the Radial lens distortion curve which is a graphical representation of the distortion characteristics of the camera lens.

On the other hand a polynomial of the form

$$dr = k_1 r^3 + k_2 r^5 + k_3 r^7 + \ldots + k_n r^{2n+1}$$

can be fitted to the above graphical representation, where

dr  =  Radial lens distortion at any radial distance r

$k_1, k_2, k_3$ = constants

$r$  =  $(x^2 + y^2)^{1/2}$

$x, y$ = measured photo-coordinates of the image point.

Investigations have shown that for the relatively simple lenses often used in Non-metric cameras $k_1$ is the only significant coefficient (Karara et al, 1974). Thus

$$dr = k_1 r^3$$

$k_1$ is called the Radial lens distortion coefficient. Knowing the value of $k_1$, thus the radial distortion at any point can be determined. $k_1$ is determined using least squares method to get more accurate results, even though it is single valued. This is quite evident from the following, we have the relation

$$dr = k_1 r^3$$

let $r^3 = R$,

then

$$dr = k_1 R$$

Therefore we get

$$v_1 = k_1 R_1 - dr_1$$

$$v_2 = k_1 R_2 - dr_2$$

$$v_3 = k_1 R_3 - dr_3$$

$$\vdots$$

where $v_1, v_2 \ldots$ are the residuals

$$\therefore \Sigma (v_i)^2 = \Sigma (k_1 R_i - dr_i)^2 = F(k)$$

In least square method since the sum of the squares of the residuals are minimized we get

$$\frac{dF(k)}{dk} = 0$$

$$\therefore \quad \frac{dF(k)}{dk} = \Sigma \, 2(k \, R_i - dr_i)R_i = 0$$

$$2k \, \Sigma \, R_i^2 - 2\Sigma \, R_i \, dr_i$$

$$\therefore \quad k = \frac{\Sigma \, R_i \, dr_i}{\Sigma \, R_i^2}$$

The arithmetic mean and other means may give different values. But the least squares minimal solution gives more accurate results.

III-3.2.4  LOCATION OF PRINCIPAL POINT

The improper centering of the lens produces the bent-axis effect the result of which is to displace the principal point away from the point of autocollimation. Also this defect produces radial lens distortions asymmetrical about the point of autocollimation. Thus this provides a method for determining the principal point location, by determining the principal point shift away from the point of autocollimation, by considering the asymmetry of the distortions around the point of autocollimation (Karren, 1968). Thus the position of the principal point can be obtained by balancing the radial lens distortions around the point of autocollimation.

This method has been used in the present study. The method is explained in detail in the paragraph IV-?.4.1.6.

III-3.?.5  FIDUCIAL MARKS AND FIDUCIAL AXES SYSTEM:

Non-metric cameras lack Fiducial marks. One method is to introduce Fiducial marks in the form of glass plate at the back of the camera. The other way is to use methods such as Direct linear Transformation (Karara, 1974) which does not require the Fiducial marks. First method has not been tried since it can be done only by the manufacturer if the camera is not to be spoiled and the second method for the want of software. In the present case the sharp corners of the format themselves are considered as the Fiducial marks (Goodrich, 1982).

To obtain the Fiducial axes system with reference to which the co-ordinates of the image points can be measured, the following procedure has been adopted (Fig. IV-2 and paragraph IV-?.3.).

1.  The co-ordinates of the left bottom corner, right bottom corner and left top corner are measured in the comparator/digitizer co-ordinate system (Fig. IV-3).

?.  Knowing these co-ordinates the lengths of the bottom edge and the left edge can be determined as explained in paragraph IV-2.3.

3. Fiducial axes system for all further measurements is thus obtained as shown in Fig. IV-2. However least square solution using four corners gives better results.

III-3.?.6  ANGLE OF INTERSECTION OF FIDUCIAL AXES:

In the above case (Fig. IV-2) the Fiducial lines are constrained to be parallel to the bottom edge and left edges of the format. If these edges are not perpendicular to each other then the Fiducial lines will also not be perpendicular.

The perpendicularity of the Fiducial axes system may be ascertained by determining the mutual perpendicularity of the left and bottom edges. The following procedure is adopted:

1. From the comparator/Digitizer measurements the x and y coordinates of the left bottom corner, right bottom corner are known in the comparator/Digitizer coordinate system.

2. Thus knowing the x and y co-ordinates of the bottom edge (e.g. $x'$, $y'$ and $x''$, $y''$) a straight line equation may be found for the bottom edge by using the relation

$$y - y' = \frac{y'' - y'}{x'' - x'} (x - x')$$

3. Similarly another straight line equation may be found for the left edge.

4. From the above two equations two slopes are obtained (say $m_1$ and $m_2$).

5.      Knowing the slopes of the two straight lines the angle

between them ($\alpha$) can be determined using the relation

$$\alpha = \tan^{-1} \left[ \frac{m_1 - m_2}{1 + m_1 m_2} \right]$$

This angle should be $90° \pm 1'$.

An illustration is given in Appendix C.

Since the same camera and the same enlarger have been
used throughout the work this illustration will be sufficient.
Also the format size and shape do not change with exposure to
exposure.

III-4    CAMERA-ENLARGER SYSTEM CALIBRATION:

As has been pointed out earlier the main intention
of the work is to evaluate the Non-metric camera-Digitizer
combination for close range photogrammetric work. Measurements
cannot be made on the 35 mm film negative since the big size of
the cursor (?50 microns) obliterates the image point on the
35 mm negative. Hence to facilitate measurements with the
digitizer the 35 mm film negatives were enlarged by 4.66 times
using a photographic enlarger.

Although a digitizer is used primarily for the measure-
ment of points, lines and areas from map data, it can also
be used to measure points on the enlarged photographs to sufficien
precision and accuracy for analytical adjustment. The precision

at the negative scale can be computed by dividing the precision (i.e. 250 microns) by the enlargement ratio (4.66). Thus it amounts to making measurements on the negative with a precision of 54 microns which is quite comparable to other photogrammetric machines (Welch et al, 1983).

During enlargement the film negative does not deform because it is sandwitched between two glass plates which are held tight together with the help of spring loaded clips in the negative carrier. Also sufficient care is taken to see that the negative plane in the enlarger is parallel to the paper print.

Thus the calibration gives the calibrated focal length, Radial lens distortion characteristics and the principal point location for the Non-metric camera-enlarger system.

III-5  TRANSFORMATION OF COMPARATOR/DIGITIZER CO-ORDINATES INTO PHOTO CO-ORDINATES:

Knowing the principal point location and hence the photo co-ordinate system the comparator/Digitizer co-ordinates can be transformed into photo-coordinates which can be used in photogrammetric analytical adjustments. For this purpose a conformal transformation has been used,

FIG·III.1 OBJECT SPACE COORDINATE SYSTEM·

the details of which are given in the paragraph IV-2.3.

## III-6   TRANSFORMATION OF PHOTO-COORDINATES INTO OBJECT SPACE COORDINATES:

For this purpose the Least Squares Bundle Adjustment has been used.  A brief description of the method is given in the pragraph V-?.4.  For more details Appendix C may be referred.  Check point discrepancies indicate the precision of the transformation capability of the Non-metric camera Digitizer system.  In addition the Bundle Adjustment method gives lot of other information about the standard error, variance and co-variance etc.  However for the evaluation of the camera-Digitizer system the check point discrepancies provide sufficient information.

A simple chair has been considered to provide a three dimensional test field over the entire depth of field of photography.  Similarly a simple pot has been chosen for mapping using contours.

# CAMERA-ENLARGER SYSTEM CALIBRATION

## IV-1 INTRODUCTION

As in any photogrammetric system the main component of this work also is the calibration of the optical system consisting of camera and the enlarger. As has been already pointed out non-metric cameras such as the one used here are manufactured for picture quality and will have variable image distance. Also the lens distortions and the principal point off-sets are usually high. Thus the first phase of accuracy analysis is the determination of the Calibrated Focal Length, Principal point offsets and the Radial Lens Distortion characteristics. In order to achieve accurate measurements in the third dimension it is necessary that the inner orientation parameters of a camera must be exactly known.

## IV-2 PROCEDURE ADOPTED FOR CALIBRATION
## IV-2.1 PHOTOGRAPHY PHASE:

A target field was prepared on a Koda-Trace paper consisting of 1 cm. diameter circles with a cross in the middle and crossing the photo format diagonally. A one second accuracy theodolite was placed in front of a plane wall exactly at 2.0 meters from the wall. The Koda-Trace paper with the target marks was fixed on the wall

Pl. IV-1

FIG. IV-1   TARGET FIELD USED FOR CAMERA
CALIBRATION

All dimensions are in mm.

such that the central target mark exactly coincided with
the intersection of the cross-wires of the theodolite,
which had been precisely levelled and set to use as a
level. With the help of the theodolite the target field
was properly shifted and oriented such that the horizontal
lines were truly horizontal and the vertical lines truly
vertical (Plate IV-1 and Fig. IV-1).With reference to the
central target mark the angles to the other target marks
were measured precisely.

The theodolite was removed and in its place the
camera was placed so that the central target mark was exactly
at the centre of the view finder. In this position the
target marks crossed the format diagonally. The camera was
levelled by placing a bubble tube (spirit level) on the top
of the camera. Since the photography was indoors a Flash
was used during exposure with a stop number of 11 and a
shutter speed of 1/60 of a second. The entire length of
the film was exposed with a view to monitor any changes from
exposure to exposure at different portions of the film.

IV-2.2  MEASUREMENT PHASE

The second step in the calibration consisted in measur-
ing the coordinates of the target point images on the exposed
calibration photographs. This was done in three steps.

1.   Measurement on the enlarged and projection printed
     photographs using Tectronix Tablet.Digitizer with
     a pixel size of 500 μ and a cursor size of 250 μ.

2.   Measurement on the enlarged and projection printed
     paper prints using the plotting table of Wild
     Autograph A-8 as a coordinato-graph. This had a
     least count of 10 microns.

3.   Measurement on 35 mm film negative with a Zeiss
     Jena 1818A stereo comparator, with a least count of
     20 microns.

Measurements on enlarged paper prints were made since
the main object of the thesis is to evaluate the system consis-
ting of a non-metric camera and a digitizer. Enlarging the
photographs was necessary as otherwise the big size of the
cursor in the case of Digitizer would obliterate the image
on 35 mm negative thus making impossible the measurements on
a 35 mm film negative with the digitizer.

IV-2.2.1  MEASUREMENT ON ENLARGED PAPER PRINTS - DIGITIZER

          The Digitizer gives the coordinates of a point, in
the digital form, displayed on the console. DOGS (Drafting
of Graphic Systems) package was used to measure the coordinates.
The paper print was firmly fixed to the Tablet by means of
adhesive tape,and using the four button cursor in the measuring

mode the coordinates were recorded. Two pointings were
made on each target point and the four corners.

## IV-2.2.2  MEASUREMENT ON ENLARGED PAPER PRINTS - AUTOGRAPH A-8

The paper print was placed on the plotting table of
the Wild Autograph A-8 and properly fixed using adhesive tape
and by placing weights at the corners. Two pointings were
made on each of the target point and four corners.

All paper prints used in the above two cases and through-
out this work were projection printed using Belvish photo-
graphic enlarger. Care was taken during enlarging to make
the plane of the negative parallel to the plane of the paper
print. The average enlargement ratio used throughout this work
is 4.66.

## IV-2.2.3  MEASUREMENT ON 35 mm NEGATIVE

The 35 mm film negative was placed approximately at
the centre of the film carrier of the stereo comparator.
The film carrier was rotated about the vertical axis so as to
make the edges of the film format approximately parallel to
the comparator coordinate system. Using the comparator mono-
scopically two pointings were made here also on each of the
target point image and the four corners of the format.

## IV-2.3 REDUCTION OF MEASURED COORDINATES TO PHOTO COORDINATE SYSTEM

At this stage the coordinates of all the target points
and the corners of the format on both 35 mm film negative
and on the Enlarged paper prints, are known in the comparator/
Digitizer coordinate system. To be used in analytical photo-
grammetric methods these coordinates are to be transformed into
the coordinates in photo-coordinate system. Fiducial axes
system is the rectangular coordinate system with the Fiducial
axes as the coordinate axes and the intersection of these
fiducial axes as the fiducial origin. But the non-metric camera lacks
the Fiducial marks. One method is to introduce the fiducial
marks in the form of glass plate at the back of the camera,
which is easily not possible. However this was not tried in
the present study as it would have defeated the very purpose
of investigating the utility of inexpensive methods by the
use of amateaur cameras in photogrammetric measurements.
Instead the corners of the format themselves were considered
as the fiducial marks

A two dimensional conformal coordinate transformation
transforms the coordinates of one rectangular coordinate system
into the other without affecting the geometry. For this
purpose the coordinates of atleast two points must be known
in both the coordinate systems. The following procedure
was adopted to transform all the comparator/digitizer coordinates
into the Fiducial axes system.

FIG.IV-2   FIDUCIAL   AXES   SYSTEM

With reference to Fig. IV-2

LBC(X), LBC(Y)  =  are the X and Y coordinates of
the left bottom corner in the
comparator coordinate system.

LTC(X), LTC(Y)  =  are the X and Y coordinates of the
left top corner in the comparator
coordinate system.

RBC(X), RBC(Y)  =  are the X and Y coordinates of the
right bottom corner in the comparator
coordinate system.

Then

$$LBED = [(RBC(X) - LBC(X))^2 + (RBC(Y) - LBC(Y))^2]^{1/2}$$

$$LLED = [(LBC(X) - LTC(X))^2 + (LBC(Y) - LTC(Y))^2]^{1/2}$$

where

LBED and LLED are the lengths of the bottom edge
and the left edge of the format respectively.

The bisectors of these lengths were considered as
the Fiducial axes and their intersection at the centre of
the photograph as the   origin.   . With this system
as the Fiducial  axes  . system the image-coordinates of
the corners of the format, now serving as the Fiducial
marks, were found out as follows:

FIG. IV-3   TWO DIMENSIONAL CONFORMAL
COORDINATE TRANSFORMATION.

image-coordinates of the left bottom corner = -LBED/2, -LLED/2

image-coordinates of the right bottom corner = +LBED/2, -LLED/2

The Fiducial axes system is thus constrained to be parallel to the left and bottom edges of the format.

Thus at this stage knowing the coordinates of the corners both in comparator/digitizer coordinate system and the Fiducial axes system transformation was possible and was applied in the following steps (Fig. IV-3):

1. $\theta = \tan^{-1} \dfrac{RBC(Y) - LBC(Y)}{RBC(X) - LBC(X)}$

2. $x_p = x_c \cos\theta - y_c \sin\theta$        Rotation

    $y_p = x_c \sin\theta + y_c \cos\theta$

3. $T_x = -LBED/2 - LBC(X)$

    $T_y = -LLED/2 - LBC(Y)$

                                Translation

4. $x_{pc} = x_p + T_x$

    $y_{pc} = y_p + T_y$

where

       $\theta$ = angle of rotation

   $x_p, y_p$ = coordinates of the points in the tilt corrected axis system

   $y_x, y_c$ = measured comparator/digitizer coordinates

   $x_{pc}, y_{pc}$ = transformed coordinates of the points in the Fiducial axes system

   $T_x, T_y$ = translation in the x and y directions respectively.

A computer program given in Appendix B transformed all the comparator/digitizer coordinates into coordinates in Fiducial axes system.

## IV-2.4  COMPUTATIONS

Measurements were made on three enlarged paper prints with the digitizer and the Autograph-A8 and on three 35 mm film negative with the comparator at different positions along the length of the film. Measurements have been thus made on 5th frame, 18th frame and the 30th frame. However for the want of time and space, only the details of the middle frame (i.e. the 18th frame) have been illustrated below. The results of the other frames are summarised at the end for comparison.

## IV-2.4.1  ENLARGED PHOTOGRAPHS - WITH DIGITIZER (Frame - 18)

### IV-2.4.1.1  TO DETERMINE EQUIVALENT FOCAL LENGTH (EFL)

Average angle to the points  P, Q, G, E  = 4.0930 degrees

Average measured distance  = 16.579 mm

∴ Equivalent Focal length (EFL) $= \dfrac{16.579}{\tan(4.0930)} = 231.686$ mm

## IV-2.4.1.2  RADIAL LENS DISTORTION BASED UPON EFL

| Angle ($\Theta$) deg. | Measured radial distance (r) (mm) | EFL tan $\Theta$ (mm) | Radial distortion (dr) (mm) |
|---|---|---|---|
| 4.0930 | 16.579 | 16.579 | 0.000 |
| 8.1355 | 33.178 | 33.120 | +0.058 |
| 12.1033 | 49.485 | 49.683 | -0.198 |
| 15.9836 | 65.888 | 66.364 | -0.476 |
| 19.6990 | 82.037 | 82.951 | -0.914 |

## IV-2.4.1.3  CALIBRATED FOCAL LENGTH (CFL)

Calibrated Focal length of a lens is a focal length which produces an overall mean distribution of Radial distortion, and is selected such that maximum positive Radial distortion is equal to the maximum negative radial distortion. In the above case, maximum positive radial distortion is +0.058 mm and occurs at a measured distance of 33.178 mm and an angle of 8.1355 degrees. Maximum negative radial distortion is -0.914 mm and occurs at a measured distance of 82.037 mm and an angle of 19.6990 degrees.

Equating these two:

$$33.178 - CFL \tan(8.1355) + 82.037 - CFL \tan(19.6990) = 0$$

Calibrated Focal length (CFL) = 229.978 mm.

FIG. IV-4 RADIAL LENS DISTORTION CURVE ENLARGED PHOTOGRAPHS
FRAME -18. ( Based upon CFL

IV-2.4.1.4   RADIAL LENS DISTORTION BASED UPON CFL

| Angle ($\theta$) deg. | Measured radial distance (r) (mm) | CFL tan $\theta$ (mm) | Radial distortion (dr) (mm) |
|---|---|---|---|
| 4.0930 | 16.579 | 16.457 | +0.122 |
| 8.1355 | 33.179 | 32.877 | +0.302 |
| 12.1033 | 49.485 | 49.317 | +0.168 |
| 15.9836 | 65.888 | 65.874 | +0.014 |
| 19.6990 | 82.037 | 82.339 | -0.302 |

Radial lens distortion curve is shown in Fig. IV-4.

IV-2.4.1.5   RADIAL LENS DISTORTION COEFFICIENT

The above radial distortion curve can be expressed mathematically in the form of a polynomial of the form

$$dr = k_1 \, r^3 + k_2 \, r^5 + k_3 \, r^7 + \ldots$$

where

dr = radial distortion at any radial distance r

$k_1, k_2, k_3, \ldots$   constants

However in the present work only the cubic term is considered (Karara, 1974)

i.e.  $dr = k_1 \, r^3$.

Thus for the above data the Radial lens distortion coefficient was determined, so that at any radial distance the correction could be applied.

$$K_1 = -0.3248 \times 10^{-6}.$$

Corrections can be applied in the following manner:

$$dx = k_1 \frac{x}{r}, \quad dy = k_1 \frac{y}{r}$$

where,

$$x, y = \text{photo-coordinates of a point}$$
$$r = \text{radial distance} = (x^2 + y^2)^{1/2}$$
$$k_1 = \text{radial lens distortion coefficient as determined above.}$$

These corrections are algebraically added to the measured photo-coordinates of the points to get the corrected coordinates.

## IV-2.4.1.6  PRINCIPAL POINT LOCATION

If the measured distances and hence the distortions are equal at the equal angle points then the radial distortion is said to be symmetrical. If not the principal point will not be exactly at the central target mark. This offset in x and y directions is called principal point offset. In non-metric cameras usually these offsets will be large.

In the present study the target points are not at equal angles. Hence a different procedure had to be adopted

to determine the principal point offsets. The following procedure was adopted:

1. Radial lens distortion based upon the calibrated focal length and hence the radial lens distortion coefficients were determined for each of the diagonals separately in exactly the same manner as explained in paragraphs IV - 2.4.1.1 - IV - 2.4.1.6.

2. For each diagonal the values of EFL, CFL and $k_1$ varied. But the value of $k_1$ for each diagonal represents the overall mean distribution of the radial lens distortion along that diagonal.

3. Considering a known and common measured radial distance along each of the diagonals the radial lens distortion along each diagonal was determined using the relation $dr = k_1 \, r^3$.

4. Since the value of $k_1$ differed for each diagonal the value of the radial lens distortion dr also varied for each diagonal.

5. Knowing the difference in dr along the diagonals the position of the principal point was determined by balancing these distortions.

Thus for example the following are the values of the Radial distortion coefficients and considering 16.579 mm as the measured distance the following table gives the values of Radial lens distortion along each of the four diagonals.

FIG. IV-6  DETAILS AT THE CENTRAL TARGET
POINT IN DETERMINING THE PRINCIPAL
POINT OFFSET

| Diagonal | Radial lens distortion coefficient, $k_1$ | Radial lens distortion dr (mm) |
|----------|-------------------------------------------|--------------------------------|
| FGHIJK | $-0.8371 \times 10^{-6}$ | $-0.00381$ |
| FQRSTU | $-0.2157 \times 10^{-6}$ | $-0.000983$ |
| FEDCBA | $+0.8432 \times 10^{-7}$ | $+0.000384$ |
| FPONML | $-0.2351 \times 10^{-6}$ | $-0.00107$ |

With reference to Fig. IV-6.

Radial lens distortion along the diagonal

FGHIJK  =  $-0.00381$ mm

Radial lens distortion along the diagonal

FEDCBA  =  $+0.000384$ mm.

Thus along these diagonals about the point 'F' which is the central target mark the distortions are not symmetrical. To balance these errors and make them symmetrical about the point 'F', a quantity 0.00171 mm must be deducted from 0.00381 mm and the same quantity is to be added to 0.000384 mm. This yields a radial distortion of 0.002097 on both the sides of the point 'F' along the diagonals under study, which is symmetrical about 'F'. Hence the position of the principal point along these diagonals occurs not at the point 'F' but a little shifted towards A along the diagonal FEDCBA by an amount equal to 0.0017 mm. Same procedure was adopted along the diagonals FQRSTU and FPONML and the shift was found to be

0.0004 mm towards U along the diagonal FQRSTU. Parallellogram law gave the resultant of these two shifts which was then transformed to give components in the X and Y directions. Thus the principal point offset determined as above worked out to

$$dx = x \text{ direction} = - 0.002 \text{ mm} ; x_o = -0.002 \text{ mm}$$
$$dy = y \text{ direction} = -0.0005 \text{ mm} ; y_o = -0.0005 \text{ mm}$$

The same procedure was adopted in the other two cases also.

## IV-2.4.2 ENLARGED PHOTOGRAPH - AUTOGRAPH A-8

### IV-2.4.2.1 TO DETERMINE EQUIVALENT FOCAL LENGTH

Average angle to the points P,Q,G,E = 4.0930 deg.

Average measured distance = 16.651 mm

Equivalent Focal length (EFL) = $\dfrac{16.651}{\tan(4.0930)}$ = 232.692 mm

### IV-2.4.2.2 RADIAL LENS DISTORTION BASED UPON EFL

| Angle(θ) deg. | Measured radial distance (r) (mm) | EFL tanθ (mm) | Radial distortion dr (mm) |
|---|---|---|---|
| 4.0930 | 16.651 | 16.651 | 0.00 |
| 8.1355 | 33.291 | 33.264 | +0.027 |
| 12.1355 | 49.613 | 49.899 | -0.286 |
| 15.9836 | 65.898 | 66.651 | -0.753 |
| 19.6990 | 82.224 | 83.311 | -1.087 |

IV-2.4.2.3  CALIBRATED FOCAL LENGTH (CFL)

$$33.291 - CFL \tan(8.1355) + 82.224 - CFL \tan(19.6990) = 0$$

$$CFL = 230.575 \text{ mm}$$

IV-2.4.2.4  RADIAL LENS DISTORTION BASED UPON CFL

| Angle $\theta$ deg. | Measured radial distance (r) (mm) | CFL $\tan\theta$ (mm) | Radial distortion dr (mm) |
|---|---|---|---|
| 4.0930 | 16.651 | 16.500 | +0.151 |
| 8.1355 | 33.291 | 32.962 | +0.329 |
| 12.1033 | 49.613 | 49.445 | +0.168 |
| 15.9836 | 65.898 | 66.045 | -0.147 |
| 19.6990 | 82.224 | 82.553 | -0.329 |

Radial lens distortion curve is shown in Fig. IV-4.

IV-2.4.2.5  RADIAL LENS DISTORTION COEFFICIENT

$$k_1 = 0.4429 \times 10^{-6}$$

IV-2.4.2.6  PRINCIPAL POINT OFFSETS

$$dx \text{ (mm)} = -0.0019 \; : \; x_o = -0.0019 \text{ mm}$$
$$dy \text{ (mm)} = -0.0006. \; : \; y_o = -0.0006 \text{ mm}.$$

## IV-2.4.3    35 mm FILM NEGATIVE - COMPARATOR

### IV-2.4.3.1 TO DETERMINE EQUIVALENT FOCAL LENGTH (EFL)

Average angle to the points $P,Q,G,E$ = 4.0930 deg.

Average measured distance          = 3.682 mm

Equivalent Focal length (EFL)      = $\dfrac{3.682}{\tan(4.0930)}$ = 51.455 mm

### IV-2.4.3.2 RADIAL LENS DISTORTION BASED UPON EFL

| Angle $\theta$ deg. | Measured radial distance (r) (mm) | EFL $\tan\theta$ (mm) | Radial distortion (dr) (mm) |
|---|---|---|---|
| 4.0930 | 3.682 | 3.682 | 0.00 |
| 8.1355 | 7.318 | 7.356 | −0.038 |
| 12.1033 | 11.019 | 11.034 | −0.015 |
| 15.9836 | 14.637 | 14.738 | −0.101 |
| 19.6990 | 18.199 | 18.422 | −0.223 |

### IV-2.4.3.3 CALIBRATED FOCAL LENGTH (CFL)

CFL  =  51.037 mm.

FIG. IV-5 RADIAL LENS DISTORTION CURVE 35mm FILM NEGATIVE
(MEASUREMENT WITH COMPARATOR) FRAME-18.

IV-2.4.3.4  RADIAL LENS DISTORTION BASED UPON CFL

| Angle $\theta$ deg. | Measured radial distance (r) (mm) | CFL $\tan\theta$ (mm) | Radial distortion (dr) (mm) |
|---|---|---|---|
| 4.0930 | 3.682 | 3.652 | +0.030 |
| 8.1355 | 7.318 | 7.296 | +0.022 |
| 12.1033 | 11.019 | 10.944 | +0.075 |
| 15.9835 | 14.637 | 14.619 | +0.018 |
| 19.6990 | 18.199 | 18.273 | -0.075 |

Radial lens distortion curve is shown in Fig. IV-5.

IV-2.4.3.5  RADIAL LENS DISTORTION COEFFICIENT

$$k_1 = -0.5784 \times 10^{-5}$$

IV-2.4.3.6  PRINCIPAL POINT OFFSETS

dx (mm) = -0.00018 : $x_o$ = -0.00018 mm

dy (mm) = -0.00042. : $y_o$ = -0.00042 mm

## IV-3  CALIBRATION RESULTS

| Particulars | Exposure 5 | Exposure 18 | Exposure 30 |
|---|---|---|---|
| CFL (mm) | 229.9765 | 229.978 | 229.975 |
| $k_1$ | $-0.3246 \times 10^{-6}$ | $-0.3248 \times 10^{-6}$ | $-0.3259 \times 10^{-6}$ |
| Principal point offset | | | |
| dx(mm) $(x_o)$ | $-0.00291$ | $-0.002$ | $-0.0017$ |
| dy(mm) $(y_o)$ | $-0.0006$ | $-0.0005$ | $-0.0008$ |

TABLE IV-3.1   CALIBRATION RESULTS : ENLARGED PHOTOGRAPHS - (DITIGIZER)

| Particulars | Exposure 5 | Exposure 18 | Exposure 30 |
|---|---|---|---|
| CFL (mm) | 230.425 | 230.575 | 230.445 |
| $k_1$ | $-0.4425 \times 10^{-6}$ | $-0.4349 \times 10^{-6}$ | $-0.4145 \times 10^{-6}$ |
| Principal point offset | | | |
| dx (mm)$(x_o)$ | $-0.0031$ | $-0.0019$ | $-0.0017$ |
| dy (mm)$(y_o)$ | $-0.0048$ | $-0.0006$ | $-0.0009$ |

TABLE - IV-3.2  CALIBRATION RESULTS : ENLARGED PHOTOGRAPHS (AUTOGRAPH A-8)

| Particulars | Exposure 5 | Exposure 18 | Exposure 30 |
|---|---|---|---|
| CFL (mm) | 51.0378 | 51.0374 | 51.038 |
| $k_1$ | $-0.5789 \times 10^{-5}$ | $-0.5784 \times 10^{-5}$ | $-0.5813 \times 10^{-5}$ |
| Principal point offset | | | |
| dx(mm) $(x_o)$ | -0.0003 | -0.00018 | -0.00011 |
| dy(mm) $(y_o)$ | -0.00024 | -0.00042 | -0.0005 |

TABLE - IV-3.3   CALIBRATION RESULTS:   35 mm NEGATIVE (COMPARATOR)

Table IV-3.1 through IV-3.3 show the calibration results for all the cases. In all further calculations which involve enlarged photographs measured upon the digitizer, the following values for the inner orientation parameters are considered:

Calibrated Focal Length (CFL) = 229.978 mm

Radial Lens Distortion Coefficient $(k_1)$ = $-0.3248 \times 10^{-6}$

Principal Point Offsets   dx(mm) = $(x_o)$ = -0.002

dy(mm) = $(y_o)$ = -0.0005.

The results tabulated indicate the following:

1. The radial lens distortion characteristics and hence the other inner orientation parameters have been significantly influenced by the distortion character- istics of the enlarged lens. This is evident from

the fact that the inner orientation parameters in the case of enlarged photographs cannot be obtained just by multiplying the inner orientation parameters in the case of 35 mm film negative, by the enlargement ratio of 4.66. For example 51.037 x 4.66 $\neq$ 229.978.

2. The results of calibration for different frames along the length of the film indicate that there is no considerable change in these parameters from frame to frame.

3. There is no significant difference in the values of the inner orientation parameters over those obtained by measurement on enlarged photographs using Digitizer and the plotting table attached to wild A-8 Autograph. Since the difference is very small and since in further work Digitizers are intended to be used, the calibration results obtained from enlarged photographs using Digitizer are considered, in all future computations.

direction. The camera base was kept at 57 cms. Camera
stations were marked on the base line and the camera
centred over the stations such that the centre of the
knurled focussing ring was exactly above the marked
camera station. Not much care was taken to level and
orient the camera. But the camera was approximately
oriented to avoid large deviations of the camera axis
from the normal. The small rotations about the X, Y and
Z axis could however be computed by again applying the
similarity transformation of the photo-coordinates to
the space coordinate system. This was done keeping in
view that photography in most cases cannot be made exactly
normal and also that thus the amateaur camera can be made
use of in as simple a manner as taking exposures by a hand
held camera. Exposures were made with a stop number of
11 and a shutter speed of 1/60 of a second.

## V-2.2   MEASUREMENT ON PHOTOGRAPHS

The 35 mm film negatives were then enlarged and
projection printed on bromide paper. The average enlarge-
ment ratio was 4.66. Same enlarger used in the case of
calibration phase was used in this case also. Measurements
were made on these enlarged photographs with the Tectronix
Tablet Digitizer and with the plotting table of the Wild
Autograph A-8 using it as a co-ordinatograph.        In
addition monoscopic measurements were also made on the 35 mm
film negative with Zeiss Jena 1818A stereo-comparator.

## V-2.3 TRANSFORMATION OF COMPARATOR/DIGITIZER COORDINATES INTO PHOTO-COORDINATES

The coordinates of the image points thus obtained in the arbitrary comparator/digitzer coordinate system were then transformed into the photo-coordinate system by applying two dimensional conformal coordinate transformation. A computer program was written for this purpose and in this program the results of the camera-enlarger calibration were also introduced so that the output from this program provided a data base for further computations, in the form of all-corrected photo-coordinates. A listing of the program with documentation is given in Appendix B.

## V-2.4 TRANSFORMATION OF PHOTO-COORDINATES INTO OBJECT SPACE COORDINATES

Thus the above program provided a data base for further transformation of these photo-coordinates into the object space coordinates, which is the ultimate goal of any photogrammetric system. For this transformation a simultaneous Least Square Bundle Adjustment Method was used.

This Bundle Adjustment minimises the sum of the squares of weighted residuals for both photo and control measurements. The process involves formation of the following observation equations for each x and y measurement.

## Observation Equations[*]

$$v_x = b_{11}(dw) + b_{12}(d\emptyset) + b_{13}(dk) - b_{14}(dX_L)$$

$$- b_{15}(dY_L) - b_{16}(dZ_L) - b_{14}(dX)$$

$$+ b_{15}(dY) + b_{16}(dZ) + J$$

$$v_y = b_{21}(dw) + b_{22}(d\emptyset) + b_{23}(dk) - b_{24}(dX_L)$$

$$- b_{25}(dX_L) - b_{26}(dZ_L) - b_{24}(dX)$$

$$+ b_{25}(dY) + b_{26}(dZ) + K$$

where

$v_x, v_y$ — residual errors in measured x and y image coordinates.

$dw, d\emptyset, dk$ — corrections to the initial approximations for the orientation angles of the camera.

$dX_L, dY_L, dZ_L$ — corrections to initial approximations for the exposers station coordinates.

$dX, dY, dZ$ — corrections to initial values for the object space coordinates of the point.

Thus the input consists of the photo—coordinates of the stereopair, initial approximations of the object space coordinates and initial approximations of the exterior orientation elements of the camera. The control points are

[*] For more details Appendix C may be referred.

weighted down so that they do not change in the Bundle
Adjustment Process. All the other points are considered
as unknowns. Similarly all the exterior orientation
parameters of the camera are considered as unknowns.
Thus the method uses the collinearity and coplanarity
conditions to determine the exterior orientation parameters
first with reference to the provided control points and
then these values are fed back to compute the position of
other points in the object space.

Bundle Adjustment Program developed at Ohio State
University to be used on IBM 360/370 has been modified
and is available with complete documentation in the IIT-
Kanpur DEC 10 system, as a software.

Bundle Adjustment Program is highly uneconomical and
requires very fast and sophisticated computers. However
it is a very highly accurate and rigorous analysis in
photogrammetry. For more details the book on Photogrammetry
by Dr. Rampal (Rampal K.K., 1982) may be referred.

The output from this Bundle Adjustment was a listing of
the object space coordinates along with the residuals. For
more details Appendix C may be referred. Input output data
are given in Appendix B.

## V-3    EXPERIMENT TO ASSESS TRANSFORMATION CAPABILITY OF THE SYSTEM (Experiment No. 1)

### V-3.1    DESCRIPTION OF THE TEST FIELD

An office chair was placed in a convenient position, standing in such a way that all the four legs and corners were visible from both the camera stations. An arbitrary coordinate system was assumed and with reference to this system the object space coordinates of all the points were measured to 1/10 of a millimeter (Plates V-1 and V-2).

### V-3.2    CHECK POINT DISCREPANCIES

After transforming the comparator/digitizer coordinates into the photo-coordinates by using conformal transformation and then the photo-coordinates into the object space coordinates by Bundle Adjustment, as detailed in the paragraphs V-2.3 and V-2.4, the next step was to compare these photogrammetrically computed object space coordinates with the actual measured ground coordinates, to check the discrepancies.

Thus to assess the accuracy of the system the RMS errors at six check points were determined. Table V-1 gives a summary of the results thus obtained.

| Point | X(cm) | Y(cm) | Z(cm) |
|-------|-------|-------|-------|
| 1 | 13.21 | 0.31 | 61.74 |
| 2 | 16.81 | 0.29 | 64.15 |
| 4 | 36.63 | 0.20 | 21.17 |
| 6 | 39.31 | 0.31 | 23.38 |
| 7 | 45.53 | 0.09 | 83.83 |
| 8 | 57.54 | 0.05 | 86.16 |
| 9 | 73.74 | 0.30 | 41.26 |
| 10 | 76.72 | 0.63 | 42.74 |
| 13 | 76.75 | 66.60 | 46.46 |
| 14 | 39.99 | 67.34 | 84.08 |
| 16 | 12.85 | 67.38 | 57.87 |
| 18 | 36.12 | 67.31 | 22.77 |

TABLE V-1(a) : LIST OF CONTROL POINT OBJECT SPACE
COORDINATES (Experiment No.1)

| | DIGITIZER | | | AUTOGRAPH A-8 | | | COMPARATOR | | |
|---|---|---|---|---|---|---|---|---|---|
| | $v_X$ (mm) | $v_Y$ (mm) | $v_Z$ (mm) | $v_X$ (mm) | $v_Y$ (mm) | $v_Z$ (mm) | $v_X$ (mm) | $v_Y$ (mm) | $v_Z$ (mm) |
| | +11.40 | +10.10 | +17.36 | +11.67 | +11.15 | +19.91 | +11.49 | +11.60 | +19.1f |
| | -39.60 | -15.76 | +14.48 | -39.26 | - 5.96 | -10.03 | -41.76 | - 2.45 | +12.82 |
| | +12.62 | -13.49 | -21.34 | +11.67 | -17.54 | -43.64 | +12.82 | - 2.12 | -21.7£ |
| | +13.00 | - 7.47 | - 8.98 | -13.09 | - 7.33 | - 8.08 | -11.91 | - 9.30 | - 8.26 |
| | +27.65 | +22.65 | +14.95 | +27.73 | 23.51 | +14.73 | +29.27 | +23.15 | +17.25 |
| | + 9.69 | - 3.09 | - 9.75 | - 9.64 | -3.82 | -12.70 | -11.51 | - 3.36 | -10.40 |
| | 24.02 | 13.64 | 16.53 | 23.86 | 12.48 | 23.85 | 25.16 | 13.50 | 17.17 |
| | 128.9 | 73.20 | 8.264 | 128.00 | 67.00 | 11.93 | 135.00 | 72.40 | 8.5c |

1 : CHECK POINT DISCREPANCIES (Experiment No. 1)

$$\text{RMS Error} = \sqrt{\frac{\sum_{i=1}^{N} v_i^2}{N-1}}$$

N = Number of observations,

$v_i$ = Residuals.

Enlargement ratio = 4.66

Average photo scale= 1.40

Pl. V-3

| Point | X(cm) | Y(cm) | Z(cm) |
|-------|-------|-------|-------|
| 2 | 19.33 | 0.00 | 88.46 |
| 3 | 17.82 | 12.32 | 48.68 |
| 4 | 8.62 | 8.54 | 51.89 |
| 5 | 65.23 | 0.00 | 88.45 |
| 7 | 76.30 | 8.15 | 52.10 |
| 8 | 69.21 | 11.80 | 47.98 |
| 9 | 69.80 | 50.43 | 88.45 |
| 10 | 68.51 | 58.72 | 57.19 |
| 11 | 43.65 | 58.56 | 55.19 |
| 12 | 21.76 | 58.63 | 57.35 |
| 13 | 18.25 | 50.14 | 90.08 |

TABLE V-2(a)  :  LIST OF CONTROL POINT OBJECT SPACE
COORDINATES (Experiment No.2)

## V-4 EXPERIMENT TO ASSESS CONTOURING CAPABILITY OF TRANSFORMED COORDINATES (Experiment No.2)

### V-4.1 DESCRIPTION OF THE TEST FIELD

An office chair was made to lie on its back with the four legs facing the camera. In between these four legs a properly targetted mud pot was placed. As in the previous experiment an arbitrary coordinate system was assumed and with reference to this system, the object space coordinates of all the points were measured to 1/10 of a millimeter (Plates V-3 and V-4).
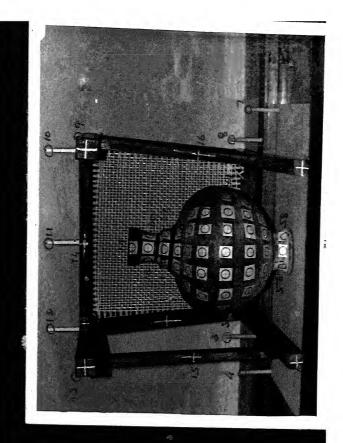
### V-4.2 CHECK POINT DISCREPANCIES

The photogrammetrically computed object space coordinates were then compared with the actual ground coordinates of the points to assess the accuracy of the system, as in the previous case. RMS errors at 3 check points were determined. Table V-2 gives a summary of the results thus obtained.

| Point | $v_X$ (mm) | $v_Y$ (mm) | $v_Z$ (mm) |
|---|---|---|---|
| 14 | -0.057 | -0.058 | 3.89 |
| 15 | -2.268 | -1.92 | 3.298 |
| 16 | -0.00095 | 0.117 | 3.24 |
| RMS Errors | 1.604 | 1.361 | 4.272 |
| RMS Errors on Negative Scale/ Depth‰ | 2.605 | 7.302 | 2.136 |

TABLE V-2 : CHECK POINT DISCREPANCIES (Experiment No.2)

# GRAPHICS AND CONTOURING FROM THE TRANSFORMED COORDINATES

## VI-1  INTRODUCTION

In the previous chapter the accuracy of the system consisting of the Non-metric camera and the Digitizer was analysed through the discrepancies at the well distributed check points over the entire depth of field of the photography. But the ultimate goal of any photogrammetry is to make maps out of the photographs and the measurements made on them. Thus the experiment No.1 with the chair alone was selected to check the graphic capability of the system and the experiment No.2 with the mud pot to check the contouring capability.

## VI-2  GRAPHIC CAPABILITY

The object space coordinates computed photogrammetrically were plotted manually for all the three cases viz. measurements on the enlarged photograph with the digitizer and the Autograph A-8 and measurements on the 35 mm film negative with the comparator(Fig. VI-2). Table VI-1 gives the X, Y, Z coordinates of the points plotted in all the three cases.

| Point | DIGITIZER | | | AUTOGRAPH A-8 | | | COMPARATOR | | |
|---|---|---|---|---|---|---|---|---|---|
| | X (cm) | Y (cm) | Z (cm) | X (cm) | Y (cm) | Z (cm) | X (cm) | Y (cm) | Z (cm) |
| 1 | 12.66 | 0.16 | 61.75 | 12.67 | 0.18 | 61.75 | 13.18 | 0.30 | 61.74 |
| 4 | 37.09 | 0.29 | 21.21 | 37.05 | 0.28 | 21.20 | 36.66 | 0.21 | 21.18 |
| 8 | 56.05 | 0.10 | 85.76 | 56.05 | 0.09 | 85.75 | 57.45 | 0.05 | 85.14 |
| 10 | 76.96 | 0.88 | 42.78 | 76.96 | 0.89 | 42.78 | 76.74 | 0.65 | 42.74 |
| 11 | 71.79 | 48.17 | 48.76 | 71.88 | 48.21 | 47.99 | 71.77 | 48.24 | 48.81 |
| 13 | 75.90 | 66.52 | 46.19 | 75.91 | 66.54 | 46.19 | 76.70 | 66.70 | 46.44 |
| 14 | 42.44 | 67.62 | 84.60 | 42.44 | 67.63 | 84.60 | 40.44 | 67.36 | 84.11 |
| 21 | 56.31 | 48.95 | 86.14 | 56.25 | 48.50 | 85.75 | 57.14 | 49.25 | 86.15 |
| 22 | 13.45 | 49.79 | 63.42 | 13.34 | 49.34 | 62.35 | 13.45 | 49.35 | 62.55 |
| 16 | 11.62 | 67.13 | 57.82 | 11.61 | 67.10 | 57.82 | 12.78 | 67.37 | 57.86 |
| 18 | 36.31 | 66.76 | 22.72 | 36.32 | 66.75 | 22.72 | 36.13 | 67.28 | 22.77 |
| 23 | 37.15 | 48.35 | 24.80 | 37.14 | 48.35 | 24.75 | 38.42 | 48.56 | 24.85 |
| 25 | 12.29 | 34.36 | 62.75 | 12.18 | 34.16 | 62.16 | 12.19 | 35.34 | 61.82 |
| 24 | 56.90 | 35.15 | 86.39 | 56.25 | 35.06 | 36.15 | 56.35 | 36.15 | 86.20 |

TABLE VI-1 : COMPUTED OBJECT SPACE COORDINATES (FOR ASSESSING GRAPHIC CAPABILITY)

(a)

(b)

(c)

(a) DIGITIZER
(b) AUTOGRAPH
(c) COMPARATOR

FIG. VI-9 GRAPHIC CAPABILITY OF THE SYSTEM.

## VI-3   CONTOURING CAPABILITY

The photogrammetrically computed X, Y, Z object space coordinates of the target points placed on the mud pot were fed into the contouring program available at CAD-P Centre, IIT-Kanpur.

## VI-3.1   CONTOURING PROGRAM

This contouring program consists of two programs:

1)   Triangulation program   -   VORN
2)   Contouring program      -   MOH3

This is a program which draws contours for a set of random X, Y, Z coordinates. Input to the program is a listing of the X, Y, Z coordinates, number of contours required and contour interval. The program VORN first does the triangulation and then the program MOH3 interpolates and draws the contours. Sixteen colours may be used in drawing the contours on the console. However when the contours are plotted on the Hewlett Packard Plotter only four colours can be used. Even then the first three colours are used for the first three contours and for rest of the contours only the last colour is used. There is no provision for writing the values of the contours in the map itself. However an index may be given for different colour coded contours.

LOWEST CONTOUR = 650mm
HIGHEST CONTOUR = 862mm
NO. OF CONTOURS = 23

FIG. VI-3 CONTOUR MAP OF POT.

To get a hard copy, contours can be plotted on the Hewlett Packard Plotter attached to the micro-computer. Fig. VI-3 shows the contour map of the pot.

# ANALYSIS OF RESULTS

## VII-1  INTRODUCTION

The work has been carried out in three phases namely
the calibration of the camera-enlarger system, assessment of
the check point discrepancies and the assessment of the system
for graphic and contouring capabilities. Hence the results
obtained from various experiments will be analysed under
the same headings.

## VII-2  CALIBRATION OF THE CAMERA ENLARGER SYSTEM

With measurements on 35 mm film negative with the
comparator a value of 51.037 mm for the calibrated Focal
length has been obtained, as against the nominal Focal
length of 50 mm. This 50 mm focal length is when focussed
at infinity. This value of 51.037 mm is quite possible and
understandable as in the non-metric cameras though enough
care is taken to properly fix the total length, it cannot be
compared to the accuracies of a metric camera and the above
discrepancy is but natural. Also the experiments that
have been conducted are not for infinite object distances but
for close range applications, the camera-object distance being
as small as 2.0 m. Hence the calibrated Focal length of
51.037 mm is quite in order.

But on enlargement and after projection printing
on the bromide paper the value of calibrated focal
length has deviated, contrary to the normal assumption
that the inner orientation parameters in the case of an
enlarged photograph can be obtained just by multiplying
the values obtained in the case of 35 mm film negative
(Welch et al., 1983). The reason for this may be, on
the one hand the large shrinkages involved in the case of
paper prints and on the other hand may be due to the
influence of the enlarger lens distortion characteristics.
However this poses some problems, as, for each and every
enlargment ratio the system is to be calibrated, since the
distortion characteristics of the enlarger lens may vary
with the setting and focussing of the enlarger lens. This
is one of the draw-backs of the system.

The results obtained from the measurements on
the enlarged photographs using the digitizer (500 microns
least count) and the plotting table of wild A-8 Autograph
(10 microns least count) are similar. This is due to the
reason that the distance between the image points, the
coordinates of which have been measured is much more than
500 microns, the least count of the digitizer. With
proper pointing both the set-ups should give the same
results. But if the distance between the points is less
than or even equal to 1 millimeter the results obtained
from the Digitizer measurements may be erroneous. However

for close range photogrammetric work is should not matter much.

The Radial distortion curves obtained in the case of 35 mm film negative and the enlarged photographs are also different (Fig. IV-4 and IV-5). This is due to the influence of the enlarger lens distortion character-istics. However both the curves show a peak which indi-cates that the distortion at a particular part of the film is sharply changing compared to the rest, the inference which may be drawn from here. Distortion in the case of enlarged prints is maximum at the centre attaining a peak value of 0.33 mm whereas in the case of direct measure-ment on 35 mm film a situation of zero distortion occurs at 15.5 mm . In the second case however there is a small kink at 7.5 mm which may be attributed to a minor measurement error or a local distortion at that point due to inaccuracies of transport mechanism and holding of film in the frame.

Even though an overall mean distribution of errors have been considered in computing the calibration focal length and other inner orientation parameters, it was found during the study that for each diagonal the distortion characteristics varied. This is due to the reason that the lenses of nonmetric cameras are not made for photo-grammetric work and this type of random variation in the

distortion characteristics are possible. More so, while
in the process of enlargment, the negative is sandwitched
between two ordinary glass plates of the enlarger through
which the light passes, the distortion patterns are
pronounced and asymmetrical in nature. Since enough care
was taken to ensure that the negative plane and the paper
print easel were parallel during exposure, such errors
however could not be due to non-parallelism of the two
planes. Shift of Principal Point away from the centre of
photograph may be the cause of nonhomogeneity and anisotropy
of the lens or the lack of proper centering of the lens.
In the simple cameras, not much care is given to these
aspects and hence large values of principal point offset
could be expected. The results in Tables IV-3.1, IV-3.2 and
IV-3.3 show that the values of Principal Point Offset are
negligibly small. This is an indication that by chance
the camera utilised for the purpose did not have considerable
errors in lens assembly.

Measurements made at different locations along
the length of the film have revealed that there is not
much change between the parameters. However some variations
were expected from exposure to exposure. The negligibly small
difference   may   be due to two reasons.

(a) The lid of the camera pushes forward the stretched
film resulting in a possible flattening, thus
avoiding considerable variation in deformation of
the exposed frames.

(b)     The measuring instruments may not be sufficiently

accurate to bring out the minor changes due to the

film deformation which may be in the order of

20-30 microns or more. Particularly with the

digitizer of low resolution used for the purpose

it could not have been possible to determine.

However from the results shown in Tables IV-3.1,
IV-3.2, and IV-3.3 it is inferred that variations of
coordinates is non-existent. This is attributed to
the very accurate pointing upon the images of the target
for calibration purposes.

## VII-3    ASSESSMENT OF CHECK POINT DISCREPANCIES

Experiments conducted to assess the check point dis-
crepancies and hence the transformation capabilities of
the entire system show that in the first case the RMS
errors (Table V-1) are comparatively higher than of the
second case. In the first case the three dimensional
object (Chair) selected did not have sharp corners. This
resulted in erroneous pointings. But in the second case
because of the sharp corners, pointings could be made very
accurately and hence there is an appreciable refinement
in the RMS values upon check points.

But even then the accuracy in the direction of depth
(2.136/1000) seems to be higher. This is because of the

reason that only a very few parameters have been considered for image refinement. If more number of parameters and higher order terms are used for image refinement, the accuracy is expected to further improve.

Also only two pointings have been made on each image point. This will only check the previous pointing. But if a number of pointings had been made and a statistical average had been taken, it is felt that the results would have improved.

## VII-4   GRAPHICS AND CONTOURING CAPABILITIES OF THE SYSTEM

Since the ultimate goal of the exercise is mapping, the Graphics and contouring capabilities of the system have been tested. Figure VI-? indicates that the system could be utilised for discrete point mapping even though continuous plotting is not possible. The small variations in shape may be due to the pointing inaccuracies upon the rounded corners of the object.

In the second experiment, where the control points were sharp and had been very accurately measured to first place of decimal nearly accurate transformation of target points was achieved. In the top and bottom portion, however the drawing did not come out too well because of placement of targets which when done with better care may provide very clear picture in this portion too. With slight modification

of the program it will also be possible to put the contour values which have been manually written at present.

It is thus seen that where the shape of an object is to be drawn through contours, this method will suitably be able to be employed.

## CONCLUSIONS, SUGGESTIONS AND RECOMMENDATIONS

### VIII-1   CONCLUSIONS

From the various investigations in this thesis, the following conclusions can be drawn:

1.   Since in the case of enlarged photographs, the enlarger lens also plays a part, the calibrated focal length is not in direct relationship with that obtained using the comparator where the negative was directly measured. However the comparable results of the calibrated focal length and other inner orientation parameters obtained from Wild A-8 and the digitizer show that the digitizer can be used as a substitute to the coordinate measuring device in photogrammetry.

2.   It is not very necessary to provide the Fiducial marks to the amateaur camera. The inner orientation parameters can otherwise also be calculated by following the methods as in the present work.

3.   Though generally photogrammetric measurements on paper prints are not recommended yet in this case where the entire system has been calibrated taking into account the target field image on paper print, it is found that the achieved accuracy is comparable

to measurements on polyster based positive prints.

4. The digitizer used was of low resolution. But it has been seen that when careful and accurate pointing has been done with a cross-shaped cursor of the digitizer, the check point accuracy in plan is extremely well proved. Comparatively in depth, the inaccuracy is slightly higher. As in the normal photogrammetric work, this accuracy can be improved by increasing the number of control points indepth and evaluating higher order parameters for required transformation.

Overall it can be said that if accurate and careful pointing is done, lower resolution of digitizer to this extent, may not be a constraint in accurate evaluations of coordinates.

5. Using the three differently obtained focal lengths, photo-coordinates of measured points in the three separate cases were transformed to space coordinate system.

The check point accuracies obtained in all the three cases were comparable and further proved that digitizer - nonmetric camera system could play a major role in very much reducing the presently exhorbitant costs of photogrammetric control provision and mapping through discrete points.

6. The points measured on photographs must be sharp and control points accurately measured, otherwise as is clear from Table V-1 and the standard errors shown in Appendix 2, the results may not be accurate.

7. An application of this method in drawing shapes of objects through contours, has however established that this method can prove to be extremely inexpensive Remote Sensing Technique in manufacturing industries.

## VIII-2   SUGGESTIONS AND RECOMMENDATIONS

1. At present the work has been conducted with camera mounted on a tripod, kept normal to object and nearly levelled. Further experiments may be held with general case in terrestrial photogrammetry and with hand-held cameras.

2. Further investigations may continue on a suitably linked Super Micro Digitizer - micro computers system along with the entire calibration, transformation, mapping package and plotter to improve the efficiency of the system.

3. To make the method versatile, the camera should be calibrated at different distances and calibration curve plotted from which suitability of combinations for different camera-object distances and different types of photography may be verified.

REFERENCES

1.  ABDEL-AZIZ, Y.I. (1975). "Film Distortion in Non-Metric
    Cameras". Photogrammetric Engineering and Remote
    Sensing, Vol. 41, No. 5, May 1975, pp. 613-615.

2.  BRANDOW, V.D.; KARARA, H.M.; BRANDENBERGER,H.H.; KRAUSSE,
    H.F. (1976). "A Non-metric Close-Range Photo-
    grammetric System for Mapping Geological Structures
    in Mines". Photogrammetrical Engineering and Remote
    Sensing, Vol. 42, No. 5, May 1976, pp. 637-648.

3.  BROWN, DUANCE, C. (1971). "Close-Range Camera Calibration".
    Photogrammetric Engineering, Vol. 37, No. 8,
    August 1971, pp. 855-866.

4.  CLEGG, ROBERT, H. (1975). "A Comparison of 9 Inch, 70 mm
    and 35 mm Cameras". Photogrammetric Engineering
    and Remote Sensing, Vol. 41, No. 12, December 1975,
    pp. 1487-1500.

5.  FAIG, WOLFGONG (1975). "Calibration of Close-Range
    Photogrammetric Systems: Mathematical Formulation".
    Photogrammetric Engineering and Remote Sensing,
    Vol. 41, No. 12, December 1975, pp. 1479-1486.

6.  GHOSH, SANJIB, K. (1979). "Analytical Photogrammetry".
    Pergamon Press.

7.  GOODRICH, DAVID C. (1982). "A Simple 35 mm SLR Photo-
    grammetric System for Glacier Measurements".
    Photogrammetric Engineering and Remote Sensing,
    Vol. 48, No. 9, September 1982, pp. 1477-1485.

8.  GRUNER, HEING (1977). "Photogrammetry: 1776-1976".
    Photogrammetric Engineering and Remote Sensing,
    Vol. 43, No. 5, May 1977, pp. 569-574.

9.  HALIM, MUNJY, R.A. (1986a). Self-Calibration using
    Finite Element Approach". Photogrammetric
    Engineering and Remote Sensing, Vol. 52, No. 3,
    March 1986, pp. 411-418.

10. HALIM, MUNJY,R.A. (1986b). "Calibrating Non-Metric
    Cameras using the Finite Element Method".
    Photogrammetric Engineering and Remote Sensing.
    Vol. 52, No. 8, August, 1986, pp. 1201-1205.

11.  HATZOPOULOS, J.N. (1985). "An Analytical System for Close-Range Photogrammetry". <u>Photogrammetric Engineering and Remote Sensing</u>. Vol. 51, No.10, October 1985, pp. 1583-1588.

12.  HOTTER. Ph (1976). "Accuracy of Close-Range Analytical Restitutions: Practical Experiments and Prediction". <u>Photogrammetric Engineering and Remote Sensing</u>, Vol. 42, No.3, March 1976, pp. 345-375.

13.  JANKE, N.C. (1972). "Field Measurements with Common Equipment". <u>Photogrammetric Engineering</u>,Vol.38, No.1, January 1972, pp. 37-47.

14.  KARARA, H.M. (1972). "Simple Cameras for Close-Range Applications". <u>Photogrammetric Engineering</u>, Vol. 38, No.5, May 1972, pp. 447-451.

15.  KARARA, H.M.; ABDEL-AZIZ, Y.I. (1974). "Accuracy Aspects of Non-Metric Imageries". <u>Photogrammetric Engineering</u>, Vol. 40, No.9, September 1974, pp. 1107-1117.

16.  KARARA, H.M. (1970) (editor). "Handbook of Non-Topographic Photogrammetry". Published by American Society of Photogrammetry, 105N, Virginia Avenue, Falls Church, No. 22046, 1979.

17.  KARARA, H.M. (1985). "Close-Range Photogrammetry: Where are we and where are we heading". <u>Photogrammetric Engineering and Remote Sensing</u>, Vol. 51, No.5, May 1985, pp. 537-544.

18.  KARREN, ROBERT J. (1968). "Camera Calibration by the Multicollimator Method". <u>Photogrammetric Engineering</u>, Vol. 34, No.7, July 1968, pp.706-719

19.  KENNERT, A.; TORLEGARD, G. (1976). "State-of-the-Art-Of Close-Range Photogrammetry". <u>Photogrammetric Engineering and Remote Sensing</u>, Vol.42,No.1, January 1976, pp. 71-79.

20.  KOLBL, OTTO R. (1976). "Metric or Non-Metric Cameras". <u>Photogrammetric Engineering and Remote Sensing</u>, Vol. 42, No.1, January 1976, pp. 103-113.

21.  MANUAL OF PHOTOGRAMMETRY (1984). 4th Edition, published by American Society of Photogrammetry.

22.  MEIER, H.K. (1972). "Film Flattening in Aerial Cameras". <u>Photogrammetric Engineering</u>, Vol. 38, No.4, 1972, pp. 367-372.

23 .    METHLEY, B.D.F. (1986). "Computational Models in
        Surveying and Photogrammetry".Blackie,
        London.

24 .    NASU, MATSURU; ANDERSON, JAMES M. (1976). "Statistical
        Testing Procedures Applied to Analytical
        Camera Calibration of Non-metric Systems".
        Photogrammetric Engineering and Remote Sensing,
        Vol. 42, No.6, June 1976, pp. 777-788.

25 .    NEEDHAM, TED D. SMITH, JAMES L. (1984). "Consequences
        of Enlarging 35 mm Aerial Photography".
        Photogrammetric Engineering and Remote Sensing,
        Vol. 50, No.8, August 1984, pp. 1143-1144.

26 .    OIMOEN, DANIEL C. (1987). "Evaluation of a Tablet
        Digitizer for Analytical Photogrammetry:
        Photogrammetric Engineering and Remote Sensing,
        Vol. 53, No.6, June 1987, pp. 601-603.

27 .    RAMPAL, K.K. (1982). "Text Book of Photogrammetry".
        Published by Mohan Primlani for Oxford and IBH
        Publishing Company.

28 .    RAMPAL, K.K. (1987). "The Projective Equations : An
        Invariant Form". Photogrammetric Engineering
        and Remote Sensing, Vol. 53, No.9, September
        1987, pp. 1239-1243.

29 .    SHMUTTER, B; REDELIUS, G. (1970). "Architecture with
        Analysis". Photogrammetric Engineering, Vol.36,
        No. 10, October 1970, pp. 1073-1078.

30 .    WELCH, R.; JORDAN, T.R. (1983). "Analytical Non-Metric
        Close-Range Photogrammetry for Monitoring
        Stream Channel Erosion". Photogrammetric
        Engineering and Remote Sensing, Vol. 49, No.3,
        March 1983, pp. 367-374.

31 .    WOLF, PAUL R. (1985). "Elements of Photogrammetry:
        With Air Photo Interpretation and Remote
        Sensing". Second Edition, 1985. Published
        by McGraw Hill International Book Company.

# APPENDIX A

## DETAILS OF INSTRUMENTS USED

# APPENDIX A

## DETAILS OF THE INSTRUMENTS USED


CAMERA  —  35 mm single-lens Reflux (SLR) Canon

Focal plane shutter.

Format: 24 mm x 36 mm.

Lens  :  FD 50 mm f 1.4


FILM    —  INDU Panchromatic miniature roll film

125 ASA/22 DIN.

BROMIDE PAPER  —   INDU Special, double weight.

ENLARGER  —Belvish Photographic Enlarger (Professional).

DIGITIZER—Tectronix Tablet Digitizer.

Effective Digitizing area 297.2 mm x 297.2 mm.

Pug:  4 button cursor.

Pixel size :  500 microns , Cursor size : 250 microns.

PLOTTER:  Hewlett Packard Plotter.

# APPENDIX B

## LISTING OF COMPUTER PROGRAMS AND INPUT OUTPUT DATA

```
C01.1        C ------------------------------------------------------------------
C0.2         C THIS PROGRAM FINDS THE MINIMAL LEAST SQUARE SOLUTION OF EQUATIONS
C0.3         C PROVIDED THE NUMBER OF EQUATIONS ARE MORE THAN THE UNKNOWNS.
C0.4         C M      =NUMBER OF EQUATIONS.
C0.5         C N      =NUMBER OF UNKNOWNS.
C0.6         C NAG SUBROUTINE F04JAF IS USED.
C0.7         C TO EXECUTE-----EX L.FOR,/SEA PUB:NAG.REL
C0.8         C ------------------------------------------------------------------
C01          READ SIGMA,TOL,A(10,6),B(10),WORK(16)
C02          INTEGER I,IFAIL,IRANK,J,LWORK,M,N,NRA
C03          NRA=10
C04          LWORK=16
C05          IFAIL=0
C06          M=5
C07          N=1
C08          TOL=5.0E-9
C09          DO 20 I=1,N
C10          READ(21,*) (A(J,1),J=1,M)
C11    20    CONTINUE
C12          READ(21,*) (B(I),I=1,M)
C13          WRITE(22,99996)
C14          WRITE(22,99992) ((A(I,J),J=1,N),I=1,M)
C15          WRITE(22,99995)
C16          WRITE(22,99992) (B(I),I=1,M)
C17          CALL F04JAF(M,N,A,NRA,B,TOL,SIGMA,IRANK,WORK,LWORK,IFAIL)
C18          WRITE(22,99994)
C19          WRITE(22,*) (B(I),I=1,N)
C20          WRITE(22,99993)SIGMA,IRANK
C21          STOP
C22    99996 FORMAT(9H MATRIX A)
C23    99995 FORMAT(9H(VECTOR B)
C24    99994 FORMAT(16H(SOLUTION VECTOR)
C25    99993 FORMAT(1X,'STANDARD ERROR=',F6.3,5X,'RANK=',I2)
C26    99992 FORMAT(1X,5F12.3)
C27          END
C28    C ------------------------------------------------------------------
```

```
0   00001111111111112222222222233333333334444444444455555555556666666666777777777788888888886
3456789012345678901234567890123456789012345678901234567890123456789012345678901234567899

0.1   C -----------------------------------------------------------------
0 2   C THIS PROGRAM TRANSFORMS THE COORDINATES IN THE COMPARATOR OR
0 3   C DIGITISER COORDINATE SYSTEM IN TO THE PHOTO FIDUCIAL
0 4   C COORDINATE SYSTEM.IT ALSO APPLIES CORRECTIONS FOR THE RADIAL
0.5   C LENS DISTORTION AND PRINCIPAL POINT SHIFT.
0.6   C -----------------------------------------------------------------
01.         READ LBCX,LBCY,LTCX,LTCY,LBED,LLED
011   C -----------------------------------------------------------------
012   C LBCX  =X COORDINATE OF LEFT BOTTOM CORNER.
013   C LBCY  =Y COORDINATE OF LEFT BOTTOM CORNER.
014   C LTCX  =X COORDINATE OF LEFT TOP CORNER.
015   C LTCY  =Y COORDINATE OF LEFT TOP CORNER.
016   C LLED  =LENGTH OF LEFT EDGE.
017   C LBED  =LENGTH OF BOTTOM EDGE.
018   C -----------------------------------------------------------------
020         READ(21,*)N,RLDC,PPX,PPY
021   C -----------------------------------------------------------------
022   C N     =NUMBER OF POINTS ON THE PHOTOGRAPH.
023   C RLDC  =RADIAL LENS DISTORTION COEFICIENT.
024   C PPX   =PRINCIPAL POINT SHIFT IN X DIRECTION.
025   C PPY   =PRINCIPAL POINT SHIFT IN Y DIRECTION.
026   C RBCX  =X COORDINATE OF RIGHT BOTTOM CORNER.
027   C RBCY  =Y COORDINATE OF RIGHT BOTTOM CORNER.
028   C -----------------------------------------------------------------
030         READ(21,*)LBCX,LBCY,RBCX,RBCY,LTCX,LTCY
04          LBED=SQRT((LBCX-RBCX)**2+(LBCY-RBCY)**2)
05.         LLED=SQRT((LBCX-LTCX)**2+(LBCY-LTCY)**2)
051   C -----------------------------------------------------------------
052   C CLBFMX,CLBFMY,CRBFMX,CRBFMY---ARE THE COORDINATES OF THE LEFT
053   C AND RIGHT BOTTOM CORNERS IN THE FIDUCIAL AXES SYSTEM.
054   C -----------------------------------------------------------------
060         CLBFMX=-LBED/2.0
070         CLBFMY=-LLED/2.0
080         CRBFMX=LBED/2.0
090         CRBFMY=-LLED/2.0
100         ALPHA=ATAN((RBCY-LBCY)/(RBCX-LBCX))
110         XC1=LBCX*COS(ALPHA)
120         YS1=LBCY*SIN(ALPHA)
130         XS1=LBCX*SIN(ALPHA)
140         YC1=LBCY*COS(ALPHA)
150         XC=XC1-YS1
160         YC=XS1+YC1
170         TX=CLBFMX-XC
180         TY=CLBFMY-YC
181   C -----------------------------------------------------------------
```

```
0182    C ALPHA  =ROTATION OR TILT OF THE PHOTOGRAPH.
0183    C TX     =TRANSLATION IN X DIRECTION.
0184    C TY     =TRANSLATION IN Y DIRECTION.
0185    C --------------------------------------------------------------
0190           ICOUNT=0
020     10     READ(21,*)X,Y
021            ICOUNT=ICOUNT+1
022            XC2=X*COS(ALPHA)
023            YS2=Y*SIN(ALPHA)
024            XS2=X*SIN(ALPHA)
025            YC2=Y*COS(ALPHA)
026            XC3=XC2-YS2+TX
027            YC3=XS2+YC2+TY
028            RLX=RLOC*XC3*(XC3**2+YC3**2)
029            RLY=RLOC*YC3*(XC3**2+YC3**2)
030            XCOR=XC3+RLX-PPX
031            YCOR=YC3+RLY-PPY
032            IF(ICOUNT.GT.N)GO TO 20
033            WRITE(22,30)XCOR,YCOR
034            GO TO 10
035     20     STOP
036     30     FORMAT(1X,F12.3,',',F12.3)
037            END
038     C --------------------------------------------------------------
```

**Photo Coordinates**

```
4,1,-3.398,-45.296,0.01
4,2,1.431,-46.375,0.01
4,3,4.193,-44.815,0.01
4,4,20.971,-37.012,0.01
4,5,23.125,-37.356,0.01
4,6,25.172,-36.639,0.01
4,7,51.449,-52.782,0.01
4,8,58.054,-53.462,0.01
4,9,63.258,-41.580,0.01
4,10,67.569,-41.005,0.01
4,11,67.895,8.542,0.01
4,12,54.523,10.365,0.01
4,13,68.962,27.995,0.01
4,14,61.956,40.632,0.01
4,15,2.214,-1.654,0.01
4,16,-0.956,38.324,0.01
4,18,24.581,27.362,0.01
4,20,22.954,-27.752,0.01
5,1,-64.621,-40.120,0.01
5,2,-61.508,-41.478,0.01
5,3,-56.702,-40.325,0.01
5,4,-29.475,-33.125,0.01
5,5,-26.574,-33.184,0.01
5,6,-24.632,-32.950,0.01
5,7,-18.589,-47.584,0.01
5,8,-12.953,-48.723,0.01
5,9,8.421,-37.165,0.01
5,10,12.184,-37.458,0.01
5,11,9.852,13.651,0.01
5,12,-18.263,15.735,0.01
5,13,10.850,33.623,0.01
5,14,-12.158,45.965,0.01
5,15,-61.295,1.752,0.01
5,16,-63.639,40.685,0.01
5,18,-27.984,30.685,0.01
5,20,-28.041,-23.765,0.01
```

**Survey Data**

```
1,1,1,1,13.21,0.31,61.74,0.01,0.01,0.01
2,2,2,2,16.81,0.29,64.15,0.01,0.01,0.01
3,3,3,3,18.32,0.31,59.26,0.00,0.00,0.00
4,4,4,4,36.63,0.20,21.17,0.01,0.01,0.01
5,5,5,5,38.16,0.20,21.17,0.00,0.00,0.00
6,6,6,6,39.31,0.31,23.38,0.01,0.01,0.01
7,7,7,7,45.53,0.09,83.83,0.01,0.01,0.01
8,8,8,8,57.54,0.05,86.16,0.01,0.01,0.01
9,9,9,9,73.74,0.30,41.26,0.01,0.01,0.01
```

## INPUT DATA

COLUMN 1 = PHOTO NUMBER
COLUMN 2 = POINT NUMBER
COLUMN 3 = X- COORDINATE (mm)
COLUMN 4 = Y- COORDINATE (mm)
COLUMN 5 = TEMP (WEIGHTAGE)

DATA FILE NAME = 2D1.DAT

COLUMN 1,3 = NAME, COLUMN 4 = POINT
COLUMN 5 = X COORDINATE (cms)
COLUMN 6 = Y COORDINATE (cms)
COLUMN 7 = Z COORDINATE (cms)
COLUMNS 8-10 = WEIGHTAGES

DATA FILE NAME = 2D1.DAT.

# RESULTS

EXTERIOR ORIENTATION

RESULT FILE NAME: FORLI.DAT

## PHOTO NO. 4

| | XO(CMS) | YO(CMS) | ZO(CMS) | KAPPA(RAD.) | PHI(RAD.) | OMEGA(RAD.) |
|---|---|---|---|---|---|---|
| | -14.426 | 36.386 | 242.991 | 0.835322D-01 | -0.134602D+00 | -0.493346D-02 |
| STD. ERROR | 0.5769D+01 | 0.6157D+01 | 0.4061D+01 | 0.2115D-01 | 0.2996D-01 | 0.3102D-01 |
| RESIDUALS | 0.2763D+02 | -0.6385D+01 | 0.7009D+01 | -0.8253D-01 | 0.1356D+00 | 0.5033D-02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

### VARIANCE /COVARIANCE MATRIX

| | | | | | |
|---|---|---|---|---|---|
| 0.33279E+02 | 0.75818E+00 | 0.54547E+01 | 0.88175E-03 | 0.16815E+00 | -0.50860E-02 |
| 0.75818E+00 | 0.37909E+02 | -0.20545E+01 | -0.52099E-01 | 0.89185E-03 | -0.18864E+00 |
| 0.54547E+01 | -0.20545E+01 | 0.16493E+02 | 0.53242E-02 | 0.50454E-01 | 0.14857E-01 |
| 0.88175E-03 | -0.52099E-01 | 0.53242E-02 | 0.44738E-03 | 0.35023E-04 | 0.20473E-03 |
| 0.16815E+00 | 0.89185E-03 | 0.50454E-01 | 0.35023E-04 | 0.89731E-03 | -0.77089E-05 |
| -0.50860E-02 | -0.18864E+00 | 0.14857E-01 | 0.20473E-03 | -0.77089E-05 | 0.96212E-03 |

## PHOTO NO. 5

| | XO(CMS) | YO(CMS) | ZO(CMS) | KAPPA(RAD.) | PHI(RAD.) | OMEGA(RAD.) |
|---|---|---|---|---|---|---|
| | 39.578 | 36.120 | 252.631 | 0.583987D-01 | -0.117683D+00 | -0.256960D-02 |
| STD. ERROR | 0.6129D+01 | 0.6395D+01 | 0.3963D+01 | 0.2040D-01 | 0.3084D-01 | 0.3196D-01 |
| RESIDUALS | 0.3147D+02 | -0.6120D+01 | -0.2631D+01 | -0.5740D-01 | 0.1187D+00 | 0.2670D-02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

VARIANCE /COVARIANCE MATRIX

| | | | | | |
|---|---|---|---|---|---|
| 0.37562E+02 | -0.25666E+00 | 0.11514E+01 | 0.41081E-02 | 0.18758E+00 | 0.21466E-02 |
| -0.25666E+00 | 0.40899E+02 | -0.26129E+01 | 0.44618E-02 | -0.11614E-02 | -0.20181E+00 |
| 0.11514E+01 | -0.26129E+01 | 0.15702E+02 | -0.57929E-03 | 0.58647E-02 | 0.17866E-01 |
| 0.41081E-02 | 0.44618E-02 | -0.57929E-03 | 0.41600E-03 | 0.45783E-04 | 0.22653E-04 |
| 0.18758E+00 | -0.11614E-02 | 0.58647E-02 | 0.45783E-04 | 0.95122E-03 | 0.12990E-04 |
| 0.21466E-02 | -0.20181E+00 | 0.17866E-01 | 0.22653E-04 | 0.12990E-04 | 0.10151E-02 |

| X (cm) | Y (cm) | Z (cm) |
|---|---|---|
| 12.6619, | 0.1594, | 61.7485 |
| 16.1571, | 0.0598, | 64.1782 |
| 17.1790, | -0.7034, | 57.5235 |
| 37.0864, | 0.2859, | 21.2084 |
| 42.1241, | 0.3576, | 19.7719 |
| 40.0340, | 0.5263, | 23.4233 |
| 46.1330, | 0.1844, | 83.9278 |
| 56.0475, | 0.0965, | 85.7547 |
| 73.9024, | 0.5821, | 41.2645 |
| 76.9568, | 0.8833, | 42.7787 |
| 71.7877, | 48.1649, | 48.7637 |
| 45.3057, | 46.2476, | 85.6978 |
| 75.8999, | 66.5201, | 46.1880 |
| 42.3076, | 67.6211, | 84.5960 |
| 12.0448, | 34.2354, | 61.4554 |
| 11.6177, | 67.1278, | 57.8230 |
| 76.3058, | 66.7633, | 22.7188 |
| 40.0993, | 10.3099, | 23.8751 |

OUTPUT FILE FOR 22.DAT

OUTPUT FILE FOR 23.DAT

RESULTS

PHOTO COORDINATES

ALG WEIGHT S TAKEN AS 1000.0

| PHOTO NO. | POINT NO. | X(MM) | Y(MM) | VX(MM) | VY(MM) |
|---|---|---|---|---|---|

| PHOTO | POINT | x(mm) | y(mm) | Ux(mm) | Uy(mm) |
|---|---|---|---|---|---|
| 4 | 1 | -3.398 | -45.296 | -0.2823D+01 | -0.8875D+00 |
| 4 | 2 | 1.431 | -46.375 | -0.2761D+01 | -0.9506D+00 |
| 4 | 3 | 4.103 | -44.815 | -0.1100D-01 | -0.1146D+00 |
| 4 | 4 | 20.921 | -37.012 | 0.2404D+01 | 0.1483D+00 |
| 4 | 5 | 23.175 | -37.356 | -0.2109D-01 | -0.2218D+00 |
| 4 | 6 | 25.172 | -36.639 | 0.3210D+01 | 0.8594D+00 |
| 4 | 7 | 51.449 | -52.782 | 0.2172D+01 | 0.6031D+00 |
| 4 | 8 | 58.054 | -53.462 | -0.5303D+01 | 0.1380D+01 |
| 4 | 9 | 63.258 | -41.580 | 0.1055D+01 | 0.1533D+01 |
| 4 | 10 | 67.569 | -41.905 | 0.1506D+01 | 0.1406D+01 |
| 4 | 11 | 67.895 | 8.542 | -0.1564D-01 | -0.1830D+00 |
| 4 | 12 | 54.523 | 10.365 | -0.4427D-02 | -0.5415D-01 |
| 4 | 13 | 68.362 | 27.995 | -0.3805D+01 | -0.5920D+00 |
| 4 | 14 | 61.956 | 40.632 | 0.9335D+01 | 0.1025D+00 |
| 4 | 15 | 2.214 | -1.654 | 0.9871D-02 | 0.1089D+00 |
| 4 | 16 | -0.956 | 38.321 | -0.5410D+01 | -0.4043D+00 |
| 4 | 18 | 24.581 | 27.362 | 0.7719D+00 | -0.2926D+01 |
| 4 | 20 | 22.954 | -27.752 | -0.1394D-01 | -0.1497D+00 |
| 5 | 1 | -64.621 | -40.120 | -0.1621D+01 | 0.1084D-01 |
| 5 | 2 | -61.508 | -41.478 | -0.2491D+01 | -0.5066D+00 |
| 5 | 3 | -56.702 | -40.325 | 0.9888D-02 | 0.1164D+00 |
| 5 | 4 | -29.475 | -33.125 | 0.2187D+01 | 0.3776D+00 |
| 5 | 5 | -26.574 | -33.184 | 0.1641D-01 | 0.2246D+00 |
| 5 | 6 | -24.632 | -32.959 | 0.4061D+01 | 0.7677D+00 |
| 5 | 7 | -18.589 | -47.584 | 0.2317D+01 | -0.2403D+00 |
| 5 | 8 | -12.953 | -48.723 | -0.5727D+01 | -0.2641D+00 |
| 5 | 9 | 8.421 | -37.165 | 0.6298D+00 | 0.9570D+00 |
| 5 | 10 | 12.184 | -37.458 | 0.8690D+00 | 0.7511D+00 |
| 5 | 11 | 9.852 | 13.651 | -0.1123D-01 | 0.1854D+00 |
| 5 | 12 | -18.263 | 15.735 | 0.3495D-02 | 0.5507D-01 |
| 5 | 13 | 10.850 | 33.623 | -0.4184D+01 | 0.4427D+00 |
| 5 | 14 | -12.158 | 45.865 | 0.8451D+01 | 0.6439D+00 |
| 5 | 15 | -61.295 | 1.752 | -0.6974D-02 | -0.1111D+00 |
| 5 | 16 | -63.639 | 10.685 | -0.4778D+01 | -0.9384D+00 |
| 5 | 18 | -27.994 | 30.685 | 0.5889D+00 | -0.2563D+01 |
| 5 | 20 | -28.041 | -23.765 | 0.1074D-01 | 0.1516D+00 |

RESULTS

SURVEY COORDINATES

OUTPUT FILE:- FOR24.DAT

| POINT NO. 1 | X | Y | Z |
|---|---|---|---|
| | 12.662 | 0.159 | 51.748 |
| STD. ERROR | 0.9936D+00 | 0.9967D+00 | 0.1130D+01 |

RESIDUALS        0.5481D+00        0.1506D+00        -0.8497D-02

WEIGHTS          10000.000         10000.000         10000.000

### VARIANCE/COVARIANCE MATRIX

0.98724E+00      -0.56396E-02      0.55023E-03

-0.56396E-02      0.99339E+00      0.58368E-01

0.55023E-03      0.58368E-01      0.12769E+01

POINT NO. 2          X                 Y                 Z

16.157            0.060             64.178

STD. ERROR       0.9916D+00        0.9942D+00        0.1130D+01

RESIDUALS        0.6529D+00        0.2302D+00        -0.2822D-01

WEIGHTS          10000.000         10000.000         10000.000

### VARIANCE/COVARIANCE MATRIX

0.98334E+00      -0.60787E-02      -0.52530E-02

-0.60787E-02      0.98853E+00      0.60117E-01

-0.52530E-02      0.60117E-01      0.12759E+01

POINT NO. 3           X                Y                Z

                   17.180           -0.703           57.524

STD. ERROR        0.2126D+01       0.3542D+01       0.1469D+02

RESIDUALS         0.1140D+01       0.1013D+01       0.1736D+01

WEIGHTS            0.000            0.000            0.000


VARIANCE/COVARIANCE MATRIX

0.45192E+01      -0.11665E+01     -0.54628E+01

-0.11665E+01      0.12543E+02      0.41871E+02

-0.54628E+01      0.41871E+02      0.21583E+03


POINT NO. 4           X                Y                Z

                   37.086            0.286           21.208

STD. ERROR        0.1040D+01       0.1039D+01       0.1134D+01

RESIDUALS        -0.4564D+00      -0.8595D-01      -0.3845D-01

WEIGHTS          10000.000        10000.000        10000.000


VARIANCE/COVARIANCE MATRIX

0.10806E+01      -0.42317E-02     -0.22742E-01

-0.42317E-02      0.10789E+01      0.33963E-01

-0.22742E-01      0.33963E-01      0.12850E+01

POINT NO. 5           X               Y               Z

                   42.124          0.358           19.722

STD. ERROR       0.3777D+01      0.4206D+01      0.2127D+02

RESIDUALS       -0.3964D+01     -0.1576D+00       0.1448D+01

WEIGHTS             0.000           0.000           0.000


        VARIANCE/COVARIANCE MATRIX

   0.14266E+02    -0.93706E+01    -0.58776E+02

  -0.93706E+01     0.17690E+02     0.71096E+02

  -0.58776E+02     0.71096E+02     0.45227E+03



POINT NO. 6           X               Y               Z

                   40.034          0.576           23.423

STD. ERROR       0.1038D+01      0.1037D+01      0.1133D+01

RESIDUALS       -0.7240D+00     -0.2163D+00     -0.4325D-01

WEIGHTS          10000.000       10000.000       10000.000


        VARIANCE/COVARIANCE MATRIX

   0.10784E+01    -0.43843E-02    -0.26024E-01

```
    -0.43843E-02      0.10760E+01    0.34449E-01

    -0.26024E-01      0.34449E-01    0.12940E+01
```

POINT NO. 7          X                Y              Z

                   46.133          0.184         83.928

STD. ERROR        0.9767D+00       0.9723D+00     0.1120D+01

RESIDUALS        -0.6030D+00      -0.9443D-01    -0.9794D-01

WEIGHTS           10000.000        10000.000      10000.000


### VARIANCE/COVARIANCE MATRIX

```
    0.95387E+00      -0.11182E-01   -0.67111E-01

    -0.11182E-01      0.94540E+00    0.74100E-01

    -0.67111E-01      0.74100E-01    0.12533E+01
```


POINT NO. 8          X                Y              Z

                   56.048          0.096         85.755

STD. ERROR        0.9791D+00       0.9715D+00     0.1115D+01

1182E-01    0.94540E+00    0.74100E-01

                  -0.67111E-01      0.74100E-01    0.12533E+01

POINT NO. 8          X                    Y                    Z

                   56.048              0.096              85.755

STD. ERROR    0.9791D+00        0.9715D+00        0.1115D+01

RESIDUALS     0.1492D+01        -0.4648D-01       0.4053D+00

WEIGHTS          10000.000          10000.000          10000.000


                VARIANCE/COVARIANCE MATRIX

     0.95858E+00      -0.12565E-01      -0.86891E-01

    -0.12565E-01       0.94374E+00       0.74413E-01

    -0.86891E-01       0.74413E-01       0.12431E+01


POINT NO. 9          X                    Y                    Z

                   73.902              0.582              41.254

STD. ERROR    0.1033D+01        0.1026D+01        0.1125D+01

RESIDUALS     -0.1674D+00       -0.2821D+00       -0.4463D-02

WEIGHTS          10000.000          10000.000          10000.000


                VARIANCE/COVARIANCE MATRIX

$$0.10667E+01 \qquad -0.64957E-02 \qquad -0.66816E-01$$

$$-0.64957E-02 \qquad 0.10530E+01 \qquad 0.39930E-01$$

$$-0.66816E-01 \qquad 0.39930E-01 \qquad 0.12647E+01$$

| POINT NO. 10 | X | Y | Z |
|---|---|---|---|
| | 76.957 | 0.883 | 42.779 |
| STD. ERROR | 0.1032D+01 | 0.1025D+01 | 0.1123D+01 |
| RESIDUALS | -0.2368D+00 | -0.2533D+00 | -0.3869D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

### VARIANCE/COVARIANCE MATRIX

$$0.10659E+01 \qquad -0.66678E-02 \qquad -0.70914E-01$$

$$-0.66678E-02 \qquad 0.10509E+01 \qquad 0.40071E-01$$

$$-0.70914E-01 \qquad 0.40071E-01 \qquad 0.12621E+01$$

| POINT NO. 11 | X | Y | Z |
|---|---|---|---|
| | 71.788 | 48.165 | 48.764 |
| STD. ERROR | 0.5406D+01 | 0.2473D+01 | 0.1639D+02 |
| RESIDUALS | 0.1262D+01 | -0.1349D+00 | -0.2134D+01 |

```
     0.29221E+02    0.48178E+01   -0.79879E+02

     0.48178E+01    0.61168E+01   -0.16088E+02

    -0.79879E+02   -0.16088E+02    0.26874E+03
```

| POINT NO. 12 | X | Y | Z |
|---|---|---|---|
|  | 45.306 | 46.248 | 95.698 |
| STD. ERROR | 0.2872D+01 | 0.1945D+01 | 0.1080D+02 |
| RESIDUALS | -0.1306D+01 | -0.7476D+00 | -0.8978D+00 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

```
     0.92465E+01    0.14805E+01   -0.23601E+02

     0.14805E+01    0.37844E+01   -0.71948E+01

    -0.23601E+02   -0.71948E+01    0.11665E+03
```

| POINT NO. 13 | X | Y | Z |
|---|---|---|---|
|  | 75.900 | 66.520 | 46.188 |
| STD. ERROR | 0.1029D+01 | 0.1021D+01 | 0.1124D+01 |
| RESIDUALS | 0.8501D+00 | 0.7994D-01 | 0.2720D+00 |

WEIGHTS            10000.000        10000.000        10000.000

VARIANCE/COVARIANCE MATRIX

0.10592E+01      0.57278E-02      -0.73297E-01

0.57278E-02      0.10429E+01      -0.36110E-01

-0.73297E-01     -0.36110E-01      0.12625E+01


POINT NO. 14          X                Y                Z

                    42.398           67.621           84.596

STD. ERROR     0.9735D+00       0.9692D+00       0.1122D+01

RESIDUALS      -0.2408D+01      -0.2811D+00      -0.5160D+00

WEIGHTS        10000.000        10000.000        10000.000


VARIANCE/COVARIANCE MATRIX

0.94771E+00      0.93935E-02      -0.61489E-01

0.93935E-02      0.93938E+00      -0.66177E-01

-0.61489E-01     -0.66177E-01      0.12590E+01


POINT NO. 15          X                Y                Z

|  | 12.045 | 34.235 | 61.455 |
|---|---|---|---|
| STD. ERROR | 0.2035D+01 | 0.2054D+01 | 0.1405D+02 |
| RESIDUALS | 0.2765D+01 | 0.2265D+01 | 0.1495D+01 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.41400E+01 | -0.12440E-02 | 0.29368E+00 |
|---|---|---|
| -0.12440E-02 | 0.47195E+01 | 0.21296E+01 |
| 0.29368E+00 | 0.21296E+01 | 0.19752E+03 |

| POINT NO. 16 | X | Y | Z |
|---|---|---|---|
|  | 11.618 | 67.128 | 57.823 |
| STD. ERROR | 0.9979D+00 | 0.1000D+01 | 0.1132D+01 |
| RESIDUALS | 0.1232D+01 | 0.2522D+00 | 0.4696D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.99571E+00 | 0.47246E-02 | 0.18535E-02 |
|---|---|---|
| 0.47246E-02 | 0.10006E+01 | -0.47807E-01 |
| 0.18535E-02 | -0.47807E-01 | 0.12811E+01 |

POINT NO. 18       X                Y             Z

|  | X | Y | Z |
|---|---|---|---|
|  | 36.306 | 66.763 | 22.719 |
| STD. ERROR | 0.10380+01 | 0.10370+01 | 0.11340+01 |
| RESIDUALS | -0.18580+00 | 0.54670+00 | 0.51180-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.10775E+01 | 0.36387E-02 | -0.22672E-01 |
| 0.36387E-02 | 0.10753E+01 | -0.29509E-01 |
| -0.22672E-01 | -0.29509E-01 | 0.12863E+01 |

POINT NO. 20       X                Y             Z

|  | X | Y | Z |
|---|---|---|---|
|  | 40.099 | 10.310 | 23.325 |
| STD. ERROR | 0.35720+01 | 0.34480+01 | 0.20500+02 |
| RESIDUALS | -0.96930+03 | -0.30990+00 | -0.97510+00 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.12760E+02 | -0.60873E+01 | -0.51817E+02 |
| -0.60873E+01 | 0.11888E+02 | 0.48597E+02 |
| -0.51817E+02 | 0.48597E+02 | 0.42009E+03 |

```
4,1,-3.277,-45.142,0.01
4,2,1.427,-46.363,0.01
4,3,4.003,-44.947,0.01
4,4,20.421,-37.097,0.01
4,5,23.612,-37.354,0.01
4,6,25.072,-36.720,0.01
4,7,51.447,-52.745,0.01
4,8,58.035,-53.459,0.01
4,9,63.269,-41.710,0.01
4,10,67.476,-41.908,0.01
4,11,67.531,8.471,0.01
4,12,54.513,10.398,0.01
4,13,68.953,28.130,0.01
4,14,62.070,40.633,0.01
4,15,2.214,-1.871,0.01
4,16,-0.979,38.027,0.01
4,18,24.581,27.101,0.01
4,20,22.037,-27.78?,0.01
5,1,-64.614,-40.105,0.01
5,2,-61.507,-41.482,0.01
5,3,-56.702,-40.319,0.01
5,4,-29.482,-33.120,0.01
5,5,-26.578,-33.191,0.01
5,6,-24.619,-32.972,0.01
5,7,-18.587,-47.561,0.01
5,8,-12.925,-48.720,0.01
5,9,8.413,-37.169,0.01
5,10,12.187,-37.457,0.01
5,11,9.842,13.647,0.01
5,12,-18.252,15.741,0.01
5,13,10.850,33.612,0.01
5,14,-12.167,45.869,0.01
5,15,-61.294,1.781,0.01
5,16,-63.634,40.693,0.01
5,18,-27.897,30.699,0.01
5,20,-28.035,-23.755,0.01
1,1,1,1,13.21,0.31,61.74,0.01,0.01,0.01
2,2,2,2,16.81,0.29,64.15,0.01,0.01,0.01
3,3,3,3,18.32,0.31,59.26,0.00,0.00,0.00
4,4,4,4,36.63,0.20,21.17,0.01,0.01,0.01
5,5,5,5,38.16,0.26,21.17,0.00,0.00,0.00
6,6,6,6,39.31,0.31,23.38,0.01,0.01,0.01
7,7,7,7,45.53,0.09,83.93,0.01,0.01,0.01
8,8,8,8,57.54,0.05,36.16,0.01,0.01,0.01
9,9,9,9,73.74,0.39,41.26,0.01,0.01,0.01
```

AUTOGRAPH A-8

```
1,1,1,10,76.72,0.63,42.74,0.01,0.01,0.01
2,2,2,11,73.05,48.03,46.63,0.00,0.00,0.00
3,3,3,12,44.0,45.5,84.8,0.00,0.00,0.00
4,4,4,13,76.75,66.60,46.46,0.01,0.01,0.01
5,5,5,14,39.99,67.34,84.08,0.01,0.01,0.01
6,6,6,15,14.81,36.5,62.95,0.00,0.00,0.00
7,7,7,16,12.85,67.38,57.87,0.01,0.01,0.01
8,8,8,18,36.12,67.31,22.77,0.01,0.01,0.01
9,9,9,20,39.13,10.0,22.85,0.00,0.00,0.00
4,13.20,30.0,250.0,0.001,0.001,0.0001
5,71.0,30.0,250.0,0.001,0.001,0.0001
INPUT FOR THE FORTRAN BLOCK
```

```
    -229.978      2    18
    1000.000
       18     4
        13.200
        30.000
       250.000
         0.001
         0.001
         0.000
         0.000     0.000     0.000     0.000     0.000     0.000
         0.000     0.000     0.000     0.000     0.000     0.000
         0.000     0.000     0.000     0.000     0.000     0.000
         0.000     0.000     0.000     0.000     0.000     0.000
         0.000     0.000     0.000     0.000     0.000     0.000
         0.000     0.000     0.000     0.000     0.000     0.000
        -3.277   -45.142
        1     1    **************
        13.210
         0.310
        61.740
     1000.000       0.000     0.000
         0.000   10000.000     0.000
         0.000       0.000 10000.000
         1.427   -46.363
        2     2    **************
        16.810
         0.290
        64.150
     1000.000       0.000     0.000
         0.000   10000.000     0.000
```

RESULTS

EXTERIOR ORIENTATION

| PHOTO NO. 4 | XO(CMS) | YO(CMS) | ZO(CMS) | KAPPA(RAD.) | PHI(RAD.) | OMEGA(RAD.) |
|---|---|---|---|---|---|---|
| | -14.841 | 36.183 | 243.013 | 0.840297D-01 | -0.136710D+00 | -0.369446D-02 |
| STD. ERROR | 0.5796D+01 | 0.6196D+01 | 0.4074D+01 | 0.2116D-01 | 0.3011D-01 | 0.3121D-01 |
| RESIDUALS | 0.2804D+02 | -0.6183D+01 | 0.6987D+01 | -0.8303D-01 | 0.1377D+00 | 0.3794D-02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

VARIANCE /COVARIANCE MATRIX

| | | | | | |
|---|---|---|---|---|---|
| 0.33598E+02 | 0.75086E+00 | 0.56294E+01 | 0.46737E-03 | 0.16981E+00 | -0.50184E-02 |
| 0.75086E+00 | 0.38389E+02 | -0.19953E+01 | -0.52786E-01 | 0.87984E-03 | -0.19105E+00 |
| 0.56294E+01 | -0.19953E+01 | 0.16598E+02 | 0.51091E-02 | 0.51565E-01 | 0.14516E-01 |
| 0.46737E-03 | -0.52786E-01 | 0.51091E-02 | 0.44854E-03 | 0.32902E-04 | 0.20813E-03 |
| 0.16981E+00 | 0.87984E-03 | 0.51565E-01 | 0.32902E-04 | 0.90645E-03 | -0.75366E-05 |
| -0.50184E-02 | -0.19105E+00 | 0.14516E-01 | 0.20813E-03 | -0.75366E-05 | 0.97411E-03 |

| PHOTO NO. 5 | XO(CMS) | YO(CMS) | ZO(CMS) | KAPPA(RAD.) | PHI(RAD.) | OMEGA(RAD.) |
|---|---|---|---|---|---|---|
| | 39.564 | 36.001 | 252.628 | 0.58739D-01 | -0.117411D+00 | -0.198697D-02 |
| STD. ERROR | 0.6158D+01 | 0.6434D+01 | 0.3950D+01 | 0.2039D-01 | 0.3099D-01 | 0.3205D-01 |
| RESIDUALS | 0.3144D+02 | -0.6001D+01 | -0.2629D+01 | -0.5774D-01 | 0.1184D+00 | 0.2087D-02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

VARIANCE /COVARIANCE MATRIX

| | | | | | |
|---|---|---|---|---|---|
| 0.77924E+02 | -0.28579E+00 | 0.11800E+01 | 0.36958E-02 | 0.18941E+00 | 0.22557E-02 |
| -0.28579E+00 | 0.41392E+02 | -0.25691E+01 | 0.46756E-02 | -0.12955E-02 | -0.20427E+00 |
| 0.11800E+01 | -0.25691E+01 | 0.15682E+02 | -0.59938E-03 | 0.59918E-02 | 0.17610E-01 |
| 0.36958E-02 | 0.46756E-02 | -0.59938E-03 | 0.41554E-03 | 0.43712E-04 | 0.21514E-04 |
| 0.18941E+00 | -0.12955E-02 | 0.59918E-02 | 0.43712E-04 | 0.96052E-03 | 0.13471E-04 |
| 0.22557E-02 | -0.20427E+00 | 0.17610E-01 | 0.21514E-04 | 0.13471E-04 | 0.10273E-02 |

| X(cm) | Y(cm) | Z(cm) |
|---|---|---|
| 12.6727, | 0.1756, | 61.7460 |
| 16.1561, | 0.0594, | 64.1769 |
| 17.1534, | -0.8046, | 57.2688 |
| 77.0520, | 0.2625, | 21.2009 |
| 42.0865, | 0.7962, | 22.1727 |
| 40.0340, | 0.5246, | 23.4240 |
| 46.1707, | 0.1863, | 83.9267 |
| 56.0492, | 0.0927, | 85.7532 |
| 73.9911, | 0.5766, | 41.2705 |
| 76.9575, | 0.8884, | 42.7788 |
| 71.8829, | 48.2054, | 47.9938 |
| 45.3090, | 46.2330, | 85.6083 |
| 75.9050, | 66.5424, | 46.1930 |
| 42.3992, | 67.6260, | 04.6024 |
| 12.0371, | 34.159, | 61.4767 |
| 11.613R, | 67.1036, | 57.8177 |
| 36.3187, | 66.7520, | 72.7189 |
| 40.0939, | 10.3825, | 24.1782 |

RESULTS

PHOTO COORDINATES

ALL WEIGHT S TAKEN AS 1000.0

PHOTO NO.  POINT NO.  X(MM)  Y(MM)  VX(MM)  VY(MM)  VY(MM)

## RESULTS
## PHOTOCOORDINATES
## ALL WEIGHTS TAKEN AS 1000.0

| ph.no | point | X (mm) | Y (mm) | Vx (mm) | Vy (mm) |
|-------|-------|--------|--------|---------|---------|
| 4 | 1 | -3.277 | -45.142 | -0.2725D+01 | -0.7327D+00 |
| 4 | 2 | 1.427 | -46.363 | -0.2777D+01 | -0.9205D+00 |
| 4 | 3 | 4.003 | -44.947 | -0.1545D-01 | -0.1638D+00 |
| 4 | 4 | 20.421 | -37.097 | 0.2036D+01 | 0.1274D+00 |
| 4 | 5 | 23.612 | -37.354 | -0.1523D-01 | -0.1636D+00 |
| 4 | 6 | 25.072 | -36.720 | 0.3205D+01 | 0.8426D+00 |
| 4 | 7 | 51.447 | -52.745 | 0.2146D+01 | 0.6248D+00 |
| 4 | 8 | 58.035 | -53.459 | -0.5334D+01 | 0.1371D+01 |
| 4 | 9 | 63.269 | -41.710 | 0.1164D+01 | 0.1457D+01 |
| 4 | 10 | 67.476 | -41.908 | 0.1524D+01 | 0.1442D+01 |
| 4 | 11 | 67.531 | 8.471 | -0.1582D-01 | -0.1873D+00 |
| 4 | 12 | 54.513 | 10.308 | -0.4212D-02 | -0.5242D-01 |
| 4 | 13 | 68.953 | 28.130 | -0.3710D+01 | -0.3692D+00 |
| 4 | 14 | 62.070 | 40.633 | 0.9406D+01 | 0.1661D+00 |
| 4 | 15 | 2.214 | -1.871 | 0.1694D-02 | 0.1765D-01 |
| 4 | 16 | -0.979 | 38.027 | -0.5448D+01 | -0.5109D+00 |
| 4 | 18 | 24.581 | 27.101 | 0.8412D+00 | -0.3076D+01 |
| 4 | 20 | 22.937 | -27.763 | -0.1176D-01 | -0.1288D+00 |
| 5 | 1 | -54.614 | -40.105 | -0.1625D+01 | -0.2079D-01 |
| 5 | 2 | -61.507 | -41.482 | -0.2494D+01 | -0.5373D+00 |
| 5 | 3 | -56.702 | -40.318 | 0.1236D-01 | 0.1654D+00 |
| 5 | 4 | -29.182 | -33.120 | 0.2208D+01 | 0.3930D+00 |
| 5 | 5 | -26.578 | -33.191 | 0.1185D-01 | 0.1656D+00 |
| 5 | 6 | -24.619 | -32.972 | 0.4067D+01 | 0.7660D+00 |
| 5 | 7 | -18.587 | -47.561 | 0.2329D+01 | -0.2479D+00 |
| 5 | 8 | -12.925 | -48.720 | -0.5695D+01 | -0.2799D+00 |
| 5 | 9 | 8.413 | -37.169 | 0.6040D+00 | 0.9742D+00 |
| 5 | 10 | 12.187 | -37.457 | 0.8631D+00 | 0.7698D+00 |
| 5 | 11 | 9.842 | 13.647 | 0.4125D-01 | 0.1895D+00 |
| 5 | 12 | -18.252 | 15.741 | 0.3376D-02 | 0.5324D-01 |
| 5 | 13 | 10.850 | 33.612 | -0.4216D+01 | 0.4154D+00 |
| 5 | 14 | -12.167 | 45.860 | 0.8417D+01 | 2.6094D+00 |
| 5 | 15 | -61.294 | 1.781 | -0.9826D-03 | -0.1805D-01 |
| 5 | 16 | -63.634 | 40.693 | -0.4799D+01 | -0.9214D+00 |
| 5 | 18 | -27.897 | 30.690 | 0.6334D+00 | -0.2536D+01 |
| 5 | 20 | -28.035 | -23.755 | 0.9041D-02 | 0.1304D+00 |

## RESULTS
## SURVEY COORDINATES

| POINT NO. 1 | X | Y | Z |
|-------------|---|---|---|
| | 12.673 | 0.176 | 61.746 |
| STD. ERROR | 0.9932D+00 | 0.9961D+00 | 0.1129D+01 |

RESIDUALS    0.5373D+00     0.1344D+00     -0.6010D-02

WEIGHTS       10000.000      10000.000      10000.000

### VARIANCE/COVARIANCE MATRIX

0.98637E+00    -0.56780E-02    0.24981E-03

-0.56780E-02    0.99231E+00    0.58011E-01

0.24981E-03    0.59011E-01    0.12756E+01


POINT NO. 2          X              Y              Z

                     16.156         0.059          64.177

STD. ERROR    0.9912D+00     0.9937D+00     0.1120D+01

RESIDUALS     0.6539D+00     0.2306D+00     -0.2686D-01

WEIGHTS       10000.000      10000.000      10000.000

### VARIANCE/COVARIANCE MATRIX

0.98248E+00    -0.61139E-02    -0.55272E-02

-0.61139E-02    0.98746E+00    0.59775E-01

-0.55272E-02    0.59775E-01    0.12745E+01

POINT NO. 3                X              Y              Z

                        17.153         -0.805         57.269

STD. ERROR          0.2129D+01     0.3522D+01     0.1460D+02

RESIDUALS           0.1167D+01     0.1115D+01     0.1991D+01

WEIGHTS              0.000          0.000          0.000


VARIANCE/COVARIANCE MATRIX

   0.45347E+01    -0.11813E+01    -0.55523E+01

   -0.11813E+01    0.12403E+02     0.41247E+02

   -0.55523E+01    0.41247E+02     0.21329E+03


POINT NO. 4                X              Y              Z

                        37.052         0.282          21.201

STD. ERROR          0.1039D+01     0.1038D+01     0.1133D+01

RESIDUALS          -0.4220D+0L    -0.8248D-01    -0.3093D-01

WEIGHTS             10000.000      10000.000      10000.000


VARIANCE/COVARIANCE MATRIX

   0.10796E+01    -0.42337E-02    -0.22828E-01

   -0.42337E-02    0.10778E+01     0.33768E-01

   -0.22828E-01    0.33768E-01     0.12837E+01

POINT NO. 5      X      Y      Z

|  | X | Y | Z |
|---|---|---|---|
|  | 42.086 | 0.796 | 22.173 |
| STD. ERROR | 0.3729D+01 | 0.4095D+01 | 0.2064D+02 |
| RESIDUALS | -0.3926D+01 | -0.5962D+00 | -0.1003D+01 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.13904E+02 | -0.89102E+01 | -0.56214E+02 |
|---|---|---|
| -0.89102E+01 | 0.15771E+02 | 0.66576E+02 |
| -0.56214E+02 | 0.66576E+02 | 0.42615E+03 |

POINT NO. 6      X      Y      Z

|  | X | Y | Z |
|---|---|---|---|
|  | 40.034 | 0.575 | 23.424 |
| STD. ERROR | 0.1038D+01 | 0.1037D+01 | 0.1133D+01 |
| RESIDUALS | -0.7240D+00 | -0.2146D+00 | -0.4404D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.10775E+01 | -0.43841E-02 | -0.26137E-01 |
|---|---|---|

-0.43841E-02    0.10749E+01    0.34249E-01

-0.26137E-01    0.34249E-01    0.12827E+01

POINT NO. 7          X              Y              Z

                    46.131         0.196          83.927

STD. ERROR          0.9764D+00     0.9718D+00     0.1119D+01

RESIDUALS          -0.6907D+00    -0.9625D-01    -0.9671D-01

WEIGHTS             10000.000      10000.000      10000.000

VARIANCE/COVARIANCE MATRIX

0.95326E+00    -0.11151E-01    -0.67256E-01

-0.11151E-01    0.94444E+00     0.73647E-01

-0.67256E-01    0.73647E-01     0.12519E+01

POINT NO. 8          X              Y              Z

                    56.149         0.093          85.753

STD. ERROR          0.9768D+00     0.9710D+00     0.1114D+01

RESIDUALS           0.1491D+01    -0.4271D-01     0.4068D+00

WEIGHTS             10000.000      10000.000      10000.000

VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.95803E+00 | -0.12511E-01 | -0.86967E-01 |
| -0.12511E-01 | 0.94281E+00 | 0.73966E-01 |
| -0.86967E-01 | 0.73966E-01 | 0.12417E+01 |

| POINT NO. 9 | X | Y | Z |
|---|---|---|---|
| | 73.911 | 0.577 | 41.270 |
| STD. ERROR | 0.1032D+01 | 0.1026D+01 | 0.1124D+01 |
| RESIDUALS | -0.1711D+00 | -0.2766D+00 | -0.1049D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.10658E+01 | -0.64557E-02 | -0.66933E-01 |
| -0.64557E-02 | 0.10519E+01 | 0.39698E-01 |
| -0.66933E-01 | 0.39698E-01 | 0.12633E+01 |

| POINT NO. 10 | X | Y | Z |
|---|---|---|---|
| | 76.957 | 0.888 | 42.779 |

STD. ERROR     0.1032D+01     0.1025D+01     0.1123D+01

RESIDUALS     -0.2375D+00    -0.2584D+00    -0.3892D-01

WEIGHTS     10000.000     10000.000     10000.000

### VARIANCE/COVARIANCE MATRIX

0.10651E+01    -0.66205E-02    -0.70906E-01

-0.66205E-02    0.10499E+01    0.39823E-01

-0.70906E-01    0.39823E-01    0.12608E+01

| POINT NO. 11 | X | Y | Z |
|---|---|---|---|
| | 71.893 | 48.205 | 47.994 |
| STD. ERROR | 0.5410D+01 | 0.2486D+01 | 0.1640D+02 |
| RESIDUALS | 0.1167D+01 | -0.1754D+00 | -0.1364D+01 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

### VARIANCE/COVARIANCE MATRIX

0.29273E+02    0.48811E+01    -0.79912E+02

0.48811E+01    0.61812F+01    -0.16295E+02

-0.79912E+02    -0.16295F+02    0.26988E+03

POINT NO. 12          X                    Y                    Z

                    45.309              46.233              85.608

STD. ERROR        0.2868D+01          0.1948D+01          0.1073D+02

RESIDUALS        -0.1309D+01         -0.7330D+00         -0.8083D+00

WEIGHTS            0.000               0.000               0.000


            VARIANCE/COVARIANCE MATRIX

      0.82246E+01      0.14871E+01     -0.23379E+02

      0.14871E+01      0.37946E+01     -0.71965E+01

     -0.23379E+02     -0.71965E+01      0.11514E+03


POINT NO. 13          X                    Y                    Z

                    75.905              66.542              46.194

STD. ERROR        0.1029D+01          0.1021D+01          0.1123D+01

RESIDUALS         0.8450D+00          0.5755D-01          0.2661D+00

WEIGHTS           10000.000           10000.000           10000.000


            VARIANCE/COVARIANCE MATRIX

      0.10586E+01      0.58175E-02     -0.73228E-01

      0.58175E-02      0.10422E+01     -0.36706E-01

-0.73228E-01    -0.36206E-01    0.12610E+01

POINT NO. 14          X                 Y                 Z

                    12.399            67.626            84.602

STD. ERROR       0.9733D+00        0.9689D+00        0.1121D+01

RESIDUALS        -0.2409D+01       -0.2860D+00       -0.5224D+00

WEIGHTS          10000.000         10000.000         10000.000

                    VARIANCE/COVARIANCE MATRIX

0.94725E+00     0.95035E-02     -0.61582E-01

0.95035E-02     0.93885E+00     -0.66320E-01        /

-0.61582E-01    -0.66320E-01     0.12573E+01

POINT NO. 15          X                 Y                 Z

                    12.037            34.159            61.477

STD. ERROR       0.2034D+01        0.2053D+01        0.1393D+02

RESIDUALS        0.2773D+01        0.2341D+01        0.1473D+01

WEIGHTS           0.000             0.000             0.000

VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.41377E+01 | -0.32643E-02 | 0.11936E+00 |
| -0.32643E-02 | 0.42139E+01 | 0.20057E+01 |
| 0.11936E+00 | 0.20057E+01 | 0.19400E+03 |

| POINT NO. 16 | X | Y | Z |
|---|---|---|---|
| | 11.614 | 67.124 | 57.818 |
| STD. ERROR | 0.99750+00 | 0.99990+00 | 0.11310+01 |
| RESIDUALS | 0.12360+01 | 0.27640+00 | 0.52290-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.99496E+00 | 0.47647E-02 | 0.16029E-02 |
| 0.47647E-02 | 0.99984E+00 | -0.47902E-01 |
| 0.16029E-02 | -0.47902E-01 | 0.12796E+01 |

| POINT NO. 18 | X | Y | Z |
|---|---|---|---|
| | 36.319 | 66.752 | 22.719 |
| STD. ERROR | 0.10380+01 | 0.10370+01 | 0.11340+01 |

RESIDUALS        -0.1987D+00        0.5580D+00        0.5105D-01

WEIGHTS             10000.000        10000.000        10000.000


### VARIANCE/COVARIANCE MATRIX

0.10767E+01        0.36792E-02        -0.22781E-01

0.36792E-02        0.10744E+01        -0.29581E-01

-0.22781E-01        -0.29581E-01        0.12849E+01


POINT NO. 20              X                 Y                 Z

                      40.094            10.383            24.128

STD. ERROR            0.3563D+01        0.3415D+01        0.2027D+02

RESIDUALS            -0.9639D+00        -0.3875D+00        -0.1278D+01

WEIGHTS               0.000             0.000             0.000


### VARIANCE/COVARIANCE MATRIX

0.12597E+02        -0.59515E+01        -0.51049E+02

-0.59518E+01        0.11659E+02        0.47175E+02

-0.51049E+02        0.47175E+02        0.41160E+03

# COMPARATOR

```
4,1,-0.729,-9.725,0.01
4,2,0.307,-9.952,0.01
4,3,0.86,-9.617,0.01
4,4,4.469,-7.942,0.01
4,5,4.962,-8.015,0.01
4,6,5.402,-7.605,0.01
4,7,11.041,-11.377,0.01
4,8,12.458,-11.473,0.01
4,9,13.575,-8.923,0.01
4,10,14.50,-8.992,0.01
4,11,14.570,1.833,0.01
4,12,11.7,2.224,0.01
4,13,14.799,6.039,0.01
4,14,13.295,8.715,0.01
4,15,0.475,-9.355,0.01
4,16,-9.205,8.224,0.01
4,18,5.275,5.872,0.01
4,20,4.926,-5.955,0.01
5,1,-13.867,-8.509,0.01
5,2,-13.199,-8.901,0.01
5,3,-12.168,-8.655,0.01
5,4,-6.325,-7.108,0.01
5,5,-5.703,-7.121,0.01
5,6,-5.286,-7.073,0.01
5,7,-3.989,-10.211,0.01
5,8,-2.780,-10.455,0.01
5,9,1.817,-7.975,0.01
5,10,2.615,-8.038,0.01
5,11,2.114,2.923,0.01
5,12,-3.919,3.377,0.01
5,13,2.326,7.215,0.01
5,14,-2.609,9.842,0.01
5,15,-13.153,0.375,0.01
5,16,-13.656,8.731,0.01
5,18,-6.005,6.585,0.01
5,20,-6.017,-5.15,0.01
1,1,1,1,13.21,0.81,51.74,0.01,0.01,0.01
2,2,2,2,16.81,0.29,51.15,0.01,0.01,0.01
3,3,3,3,18.32,0.81,59.25,0.00,0.00,0.00
4,4,4,4,36.63,0.25,21.17,0.01,0.01,0.01
5,5,5,5,36.16,0.25,21.17,0.00,0.00,0.00
6,6,6,6,39.31,0.81,23.38,0.01,0.01,0.01
7,7,7,7,45.53,0.09,33.83,0.01,0.01,0.01
8,8,8,8,57.54,0.05,85.16,0.01,0.01,0.01
9,9,9,9,73.74,0.80,41.25,0.01,0.01,0.01
```

```
1,1,1,10,76.72,3.63,42.74,9.01,3.01,0.01
2,2,2,11,73.05,43.05,45.63,3.00,3.00,3.00
3,3,3,12,44.0,45.6,34.3,0.0,3.00,3.00
4,4,4,13,76.75,55.6,45.45,3.01,3.01,3.01
5,5,5,14,39.99,57.3,64.03,3.01,3.01,3.01
6,6,6,15,14.81,35.6,52.95,0.03,3.03,3.03
7,7,7,16,12.85,57.33,57.37,3.01,3.01,3.01
8,8,8,18,35.12,57.81,22.77,3.01,3.01,3.01
9,9,9,20,39.13,13.0,22.95,3.00,3.00,3.00
4,13,20,30.0,250.0,0.001,3.001,0.0001
5,71.0,30.0,250.0,0.001,3.001,0.0001
INPUT FOR THE FORTRAN BLOCK
```

— SURVEY DATA

EXTERIOR ORIENTATION ELEMENTS.

DEGREES OF FREEDOM=*****

NUMBER OF PHOTOGRAPHS= 2

UNIT STANDARD ERROR= 0.48135D+02

RESIDUALS

EXTERIOR ORIENTATION

| PHOTO NO. 1 | XO(CMS) | YO(CMS) | ZO(CMS) | KAPPA(RAD.) | PHI(RAD.) | OMEGA(RAD.) |
|---|---|---|---|---|---|---|
|  | -17.347 | 37.020 | 249.171 | 0.859323D-01 | -0.444510D+00 | -0.835717D-02 |
| STD. ERROR | 0.68885D+01 | 0.7342D+01 | 0.48330+01 | 0.24480-01 | 0.1452D-01 | 0.358+0-01 |
| RESIDUALS | 0.30550+02 | -0.70200+01 | 0.82620+01 | -0.84930-01 | 0.145*0+00 | 0.84570-02 |
| WEIGHTS | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.0 |

VARIANCE/COVARIANCE MATRIX

| | | | | | |
|---|---|---|---|---|---|
| 0.47410E+02 | 0.82470E+00 | 0.80645E+01 | 0.71649E-02 | 0.731472+00 | -0.26895E-02 |
| 0.82470E+02 | 0.53903E+02 | -0.31982E-01 | -0.72674E-01 | -0.04976E-04 | -0.26309E+00 |
| 0.80545E+01 | -0.31928E+01 | 0.23842E+02 | 0.05900E-02 | 0.717452-01 | 0.21482E-01 |
| 0.71649E-02 | -0.72974E-01 | 0.80664E-02 | 0.59936E-02 | 0.606718-04 | 0.281608-03 |
| 0.23152E+00 | -0.98976E-04 | 0.71745E-01 | 0.59621E-04 | 0.019458-02 | -0.26847E-05 |
| -0.56897E-02 | -0.26009E+00 | 0.21961E-01 | 0.2818020 | -0.26847E-05 | 0.12945E-02 |

| PHOTO NO. 5 | XO(CMS) | YO(CMS) | ZO(CMS) | KAPPA(RAD) | PHI(RAD) | OMEGA(RAD) |
|---|---|---|---|---|---|---|
| | 33.687 | 36.348 | 259.592 | 0.611231D-01 | -0.417489D+00 | -0.321811D-02 |
| STD. ERROR | 0.7349D+01 | 0.76340+01 | 0.47450+01 | 0.2353D-01 | 0.35720-01 | 0.36760-01 |
| RESIDUALS | 0.32310+02 | -0.63480+01 | -0.35920+01 | -0.0012D-01 | 0.418+D+00 | 0.31810-02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

VARIANCE /COVARIANCE MATRIX

| | | | | | |
|---|---|---|---|---|---|
| 0.54007E+02 | -0.69333E+00 | 0.19750D+01 | 0.26083E+00 | 0.24064E+00 | 0.44937E-04 |
| -0.69333E+00 | 0.59281E+02 | -0.36924D+01 | 0.61752E-02 | -0.32012E-02 | -0.27615E+00 |
| 0.19750D+01 | -0.36924E+01 | 0.22522D+02 | -0.62513E-03 | 0.31145E-01 | 0.24403E-01 |
| 0.57330E-02 | 0.61752E-02 | -0.62513E-03 | 0.55355E-03 | 0.60303E-04 | 0.32837E-04 |
| 0.26054E+00 | -0.32021E-02 | 0.10195E-01 | 0.60383E-04 | 0.12760E-02 | 0.24725E-04 |
| 0.41937E-02 | -0.27615E+00 | 0.24403E-01 | 0.32837E-01 | 0.24725E-04 | 0.13515E-02 |

RESULTS
PHOTO COORDINATES
ALL WEIGHTS TAKEN AS 1000.0

| PHOTO NO. | POINT NO. | X(MM) | Y(MM) | VX(MM) | VY(MM) |
|---|---|---|---|---|---|
| 4 | 1 | -0.729 | -9.720 | -0.7721D+00 | -0.2470D+00 |
| 4 | 2 | 0.307 | -9.952 | -0.7894D+00 | -0.2820D+00 |
| 4 | 3 | 0.830 | -9.517 | -0.2070D-02 | -0.4437D-01 |
| 4 | 4 | 4.489 | -7.942 | 0.6537D+01 | 0.8491D-01 |
| 4 | 5 | 4.952 | -8.015 | -0.5122D-02 | -0.5424D-01 |
| 4 | 6 | 5.402 | -7.335 | 0.8907D+00 | 0.0724D+00 |
| 4 | 7 | 11.041 | -11.327 | 0.6456D+00 | 0.8520D-01 |
| 4 | 8 | 12.458 | -11.473 | -0.1535D+01 | 0.8114D+00 |
| 4 | 9 | 13.575 | -8.923 | 0.3094D+00 | 0.8425D+00 |
| 4 | 10 | 14.500 | -8.932 | 0.4266D+00 | 0.357D+00 |
| 4 | 11 | 14.570 | 1.338 | -0.4069D-02 | -0.4214D-01 |
| 4 | 12 | 11.700 | 2.224 | -0.7147D-04 | -0.7639D-01 |
| 4 | 13 | 14.739 | 6.003 | -0.1039D+01 | -0.4160D+00 |
| 4 | 14 | 13.295 | 8.719 | 0.2642D+01 | 0.453D+00 |
| 4 | 15 | 0.475 | -0.355 | 0.2602D-02 | 0.0616D-01 |
| 4 | 16 | -0.205 | 8.224 | -0.1537D+01 | -0.8021D+00 |
| 4 | 18 | 5.275 | 5.872 | 0.1907D+00 | -0.8042D+00 |
| 4 | 20 | 4.926 | -5.955 | -0.4267D-02 | -0.4122D-01 |
| 5 | 1 | -13.857 | -8.539 | -0.5036D+00 | -0.7454D-01 |
| 5 | 2 | -13.199 | -8.901 | -0.7217D+00 | -0.0354D+00 |
| 5 | 3 | -12.158 | -8.553 | 0.1692D-02 | 0.4471D-01 |
| 5 | 4 | -6.325 | -7.138 | 0.6144D+00 | 0.8111D+00 |
| 5 | 5 | -5.703 | -7.121 | 0.4911D-02 | 0.5400D-01 |
| 5 | 6 | -5.236 | -7.073 | 0.1670D+01 | 0.0187D+00 |
| 5 | 7 | -3.989 | -10.211 | 0.6566D+00 | -0.8530D-01 |
| 5 | 8 | -2.730 | -10.455 | -0.1622D+01 | -0.5400D-01 |
| 5 | 9 | 1.807 | -7.975 | 0.2018D+00 | 0.0951D+00 |
| 5 | 10 | 2.615 | -8.038 | 0.2701D+00 | 0.043D+00 |
| 5 | 11 | 2.114 | 2.929 | 0.9955D-02 | 0.026D-01 |
| 5 | 12 | -3.919 | 3.377 | 0.5461D-04 | 0.7642D-04 |
| 5 | 13 | 2.328 | 7.215 | -0.4111D+01 | 0.4042D+00 |
| 5 | 14 | -2.609 | 9.842 | 0.2433D+01 | 0.2108D+00 |
| 5 | 15 | -13.153 | 0.375 | -0.1977D-02 | -0.0673D-01 |
| 5 | 16 | -13.656 | 8.731 | -0.1382D+01 | -0.9418D+00 |
| 5 | 18 | -6.005 | 5.595 | 0.1661D+00 | -0.6044D+00 |
| 5 | 20 | -6.017 | -5.100 | 0.3368D-02 | 0.4189D-01 |

RESULTS
SURVEY COORDINATES

| POINT NO. 1 | X | Y | Z |
|---|---|---|---|
| | 13.176 | 0.209 | 61.741 |
| STD. ERROR | 0.2794D+00 | 0.2794D+00 | 0.2812D+00 |
| RESIDUALS | 0.3354D-01 | 0.4114D-01 | -0.6031D-04 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.76040E-01 | -0.26752E-04 | -0.11014E-04 |
|---|---|---|
| -0.26752E-04 | 0.78053E-01 | 0.20728E-03 |
| -0.11014E-04 | 0.20728E-03 | 0.79092E-01 |

| POINT NO. 2 | X | Y | Z |
|---|---|---|---|
| | 16.770 | 0.274 | 64.151 |
| STD. ERROR | 0.2793D+00 | 0.2793D+00 | 0.2812D+00 |
| RESIDUALS | 0.3998D-01 | 0.4612D-01 | -0.4463D-02 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.78023E-01 | -0.27763E-04 | -0.32411E-04 |
|---|---|---|
| -0.27763E-04 | 0.78031E-01 | 0.21370E-03 |
| -0.32411E-04 | 0.21370E-03 | 0.79088E-01 |

POINT NO. 3          X                Y                Z

                   17.171          -0.850          57.444

STD. ERROR      0.2488D+01      0.4029D+01      0.1590D+02

RESIDUALS       0.1149D+01      0.4150D+01      0.4416D+01

WEIGHTS            0.000           0.000           0.000


                VARIANCE/COVARIANCE MATRIX

     0.61901E+01     -0.20022E+01     -0.97643E+01

    -0.20022E+01      0.16229E+02      0.54327E+02

    -0.97643E+01      0.54327E+02      0.26570E+03



POINT NO. 4          X                Y                Z

                   36.657           0.205          21.172

STD. ERROR      0.2800D+00      0.2800D+00      0.2813D+00

RESIDUALS      -0.2733D-01     -0.6325D-02     -0.2474D-02

WEIGHTS         10000.000       10000.000       10000.000


                VARIANCE/COVARIANCE MATRIX

     0.78427E-01     -0.15109E-04     -0.79043E-04

    -0.15109E-04      0.78418E-01      0.11343E-03

    -0.79043E-04      0.11343E-03      0.79118E-01

POINT NO. 5          X                Y                Z

                   12.336           0.445           14.438

STD. ERROR      0.4402D+01        0.4733D+01        2.2411D+02

RESIDUALS      -0.4175D+01       -0.2448D+00        0.4282D+01

WEIGHTS          0.000            0.000             0.000


                VARIANCE/COVARIANCE MATRIX

     0.19376E+02    -0.12315E+02    -0.78677E+02

    -0.12315E+02     0.22404E+02     0.89708E+02

    -0.78677E+02     0.89708E+02     0.58151E+03


POINT NO. 6          X                Y                Z

                   39.352           0.324           24.484

STD. ERROR      0.2300D+00        0.2300D+00        0.2813D+00

RESIDUALS      -0.4191D-01       -0.4385D-01       -0.2590D-02

WEIGHTS        10000.000        10000.000        10000.000


                VARIANCE/COVARIANCE MATRIX

     0.7841E-01    -0.1548E-04    -0.8929E-04

$$-0.15483E-04 \qquad 0.78406E-01 \qquad 0.11572E-03$$

$$-0.89292E-04 \qquad 0.11572E-03 \qquad 0.79114E-01$$

| POINT NO. 7 | X | Y | Z |
|---|---|---|---|
| | 45.558 | 3.093 | 84.437 |
| STD. ERROR | 0.2791D+00 | 0.2790D+00 | 0.2811D+00 |
| RESIDUALS | -0.3752D-01 | -0.2302D-02 | -0.6995D-02 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

$$0.77871E-01 \qquad -0.38078E-04 \qquad -0.25421E-03$$

$$-0.38078E-04 \qquad 0.77823E-01 \qquad 0.27707E-03$$

$$-0.25421E-03 \qquad 0.27707E-03 \qquad 0.79006E-01$$

| POINT NO. 8 | X | Y | Z |
|---|---|---|---|
| | 57.449 | 3.051 | 84.135 |
| STD. ERROR | 0.2791D+00 | 0.2759D+00 | 0.2812D+00 |
| RESIDUALS | 0.9356D-01 | -0.5110D-03 | 0.0527D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

STD. ERROR     0.27993+00     0.27993+00     0.2811+00

RESIDUALS     -0.14900-01     -0.45250-01     -0.05210-07

WEIGHTS     10000.000     10000.000     10000.000

VARIANCE/COVARIANCE MATRIX

0.78360E-01     -0.19505E-04     -0.24418E-03

-0.19505E-04     0.78307E-01     0.13801E-03

-0.24419E-03     0.13801E-03     0.79040E-01

POINT NO. 11     X     Y     Z

71.763     48.242     44.425

STD. ERROR     0.61810+01     0.28190+01     0.1875+02

RESIDUALS     0.12320+01     -0.21180+00     -0.01750-01

WEIGHTS     0.000     0.000     0.000

VARIANCE/COVARIANCE MATRIX

0.36205E+02     0.59107E+01     -0.10431E+03

0.59107E+01     0.79433E+01     -0.19792E+02

-0.10431E+03     -0.19792E+02     0.35186E+03

POINT NO. 12          X                Y                Z

                    45.191           46.430           85.626

STD. ERROR        0.33600+01       0.22410+01       0.1256 0+02

RESIDUALS        -0.41310+01      -0.93000+00      -0.82610+00

WEIGHTS             0.000            0.000            0.000


                    VARIANCE/COVARIANCE MATRIX

    0.11292E+02      0.18953E+01     -0.32271E+02

    0.18953E+01      0.50241E+01     -0.91093E+01

   -0.32271E+02     -0.91093E+01      0.15769E+03




POINT NO. 13          X                Y                Z

                    76.701           55.596           46.444

STD. ERROR        0.27990+00       0.27930+00       0.2811 0+00

RESIDUALS         0.49350-01       0.41310-02       0.45950-01

WEIGHTS          10000.000        10000.000        10000.000


                    VARIANCE/COVARIANCE MATRIX

    0.78331E-01      0.15195E-01     -0.25878E-03

    0.15195E-04      0.78272E-01     -0.12217E-03

-0.25878E-03   -0.12217E-03   0.75039E-01

POINT NO. 14        X              Y              Z

                  40.135        57.364         84.111

STD. ERROR    0.27900+00    0.27890+00    0.28110+00

RESIDUALS    -0.14550+00   -0.24810-01   -0.81960-01

WEIGHTS      10000.000     10000.000     10000.000

### VARIANCE/COVARIANCE MATRIX

0.77841E-01    0.30909E-04   -0.22236E-03

0.30909E-04    0.77796E-01   -0.23906E-03

-0.22236E-03   -0.23906E-03   0.75035E-01

POINT NO. 15        X              Y              Z

                  11.883        34.185         61.224

STD. ERROR    0.23570+01    0.23750+01    0.16200+02

RESIDUALS    0.29270+01    0.23150+01    0.41250+01

WEIGHTS        0.000          0.000          0.000

VARIANCE/COVARIANCE MATRIX

| 0.55556E+01 | -0.34152E-01 | -0.20619E+01 |
| -0.34152E-01 | 0.56458E+01 | 0.33836E+01 |
| -0.20619E+01 | 0.33836E+01 | 0.26233E+03 |

| POINT NO. 16 | X | Y | Z |
|---|---|---|---|
| | 12.775 | 57.365 | 57.456 |
| STD. ERROR | 0.27943+00 | 0.27943+00 | 0.2813+00 |
| RESIDUALS | 0.75470-01 | 0.14920-01 | 0.89540-02 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.78077E-01 | 0.22073E-04 | -0.96636E-05 |
| 0.22073E-04 | 0.78087E-01 | -0.16628E-03 |
| -0.96636E-05 | -0.16628E-03 | 0.79107E-01 |

| POINT NO. 18 | X | Y | Z |
|---|---|---|---|
| | 36.131 | 57.276 | 22.751 |
| STD. ERROR | 0.28000+00 | 0.28000+00 | 0.2813+00 |

| RESIDUALS | -0.1072D-01 | 0.8217D-01 | 0.0425D-02 |
|---|---|---|---|
| WEIGHTS | 10000.000 | 10000.000 | 10000.040 |

VARIANCE/COVARIANCE MATRIX

|  |  |  |
|---|---|---|
| 0.76415E-01 | 0.12783E-04 | -0.80183E-04 |
| 0.12783E-04 | 0.78403E-01 | -0.97977E-04 |
| -0.80183E-04 | -0.97877E-04 | 0.79127E-01 |

| POINT NO. 20 | X | Y | Z |
|---|---|---|---|
|  | 40.281 | 10.337 | 24.490 |
| STD. ERROR | 0.41710+01 | 0.89130+01 | 0.2328+02 |
| RESIDUALS | -0.4151D+01 | -0.8356D+00 | -0.4410-01 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

|  |  |  |
|---|---|---|
| 0.17399E+02 | -0.80940E+01 | -0.65829E+02 |
| -0.80940E+01 | 0.15309E+02 | 0.61857E+02 |
| -0.69829E+02 | 0.61850E+02 | 0.54210E+03 |

```
        0000111111111122222222223333333333444444444455555555556666666666777777777788888888889999999999000
123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890123456789012
```

|   | x | y |
|---|---|---|

```
11,2,8.776,-38.227,0.01
11,3,3.207,-16.503,0.01
11,5,-5.877,-21.683,0.01
11,6,-5.967,-33.631,0.01
11,7,66.468,-16.916,0.01
11,8,57.196,-12.427,0.01
11,9,67.613,29.847,0.01
11,10,52.782,37.026,0.01
11,11,28.072,35.51,0.01
11,12,4.657,33.686,0.01
11,13,3.365,25.512,0.01
11,14,28.580,25.152,0.01
11,15,2.545,-7.538,0.01
11,16,62.888,-3.525,0.01
11,18,30.853,7.879,0.01
11,19,34.669,8.038,0.01
11,2,37.616,7.796,0.01
11,21,30.468,3.770,0.01
11,22,35.110,3.422,0.01
11,23,38.616,3.731,0.01
11,24,27.303,-0.761,0.01
11,25,36.893,-0.316,0.01
11,26,35.347,0.73,0.01
11,27,43.109,-0.415,0.01
11,28,26.574,-3.237,0.01
11,3,36.505,-2.537,0.01
11,32,46.149,-3.279,0.01
11,33,24.961,-7.971,0.01
11,35,37.860,-6.935,0.01
11,37,47.827,-7.05,0.01
11,39,21.157,-14.344,0.01
11,41,32.802,-13.335,0.01
11,42,38.843,-13.321,0.01
11,44,34.551,-13.114,0.01
11,45,51.223,-12.5,0.01
11,46,22.793,-20.233,0.01
11,47,33.213,-20.533,0.01
11,48,38.780,-20.214,0.01
11,5,47.687,-18.595,0.01
11,51,28.261,-25.047,0.01
11,53,38.043,-25.613,0.01
11,55,45.789,-22.484,0.01
11,56,31.638,-29.76,0.01
11,58,39.754,-29.023,0.01
12,2,-65.809,-42.572,0.01
12,3,-57.069,-20.165,0.01
12,4,-67.349,-25.485,0.01
12,5,-7.833,-41.865,0.01
12,7,5.476,-24.445,0.01
12,8,-2.924,-20.191,0.01
12,9,-3.165,21.998,0.01
12,1,-6.943,30.392,0.01
12,11,-31.805,29.861,0.01
12,12,-55.735,39.345,0.01
12,13,-68.723,21.255,0.01
12,14,-32.060,19.351,0.01
12,15,-63.114,-12.847,0.01
12,16,-7.041,-11.453,0.01
12,18,-36.587,1.167,0.01
12,19,-32.781,1.894,0.01
12,2,-29.242,1.481,0.01
12,21,-37.342,-2.284,0.01
12,22,-33.109,-2.82,0.01
12,23,-28.693,-2.751,0.01
12,24,-37.727,-6.357,0.01
12,25,-33.313,-5.593,0.01
12,26,-28.553,-6.657,0.01
12,27,-24.453,-6.732,0.01
12,28,-42.902,-9.233,0.01
12,3,-33.628,-9.313,0.01
12,32,-23.050,-9.723,0.01
12,33,-45.859,-13.554,0.01
12,35,-33.842,-13.397,0.01
12,37,-22.470,-13.833,0.01
12,38,-49.378,-19.444,0.01
12,4,-39.579,-20.105,0.01
12,41,-33.623,-19.453,0.01
12,42,-27.238,-20.112,0.01
12,45,-18.147,-19.721,0.01
12,46,-44.353,-26.532,0.01
12,47,-33.529,-26.511,0.01
12,48,-27.272,-25.377,0.01
12,5,-19.154,-25.131,0.01
12,51,-42.379,-31.577,0.01
12,53,-33.292,-31.517,0.01
12,55,-24.050,-29.799,0.01
12,56,-37.183,-35.457,0.01
12,58,-28.833,-35.573,0.01
1,1,1,2,19.33,0.01,34.46,0.01,0.03,0.01
```

EXPERIMENT 2.

Plates V-3,V-4

INPUT DATA

Photo Coordinates

EXTERIOR ORIENTATION PARAMETERS

— Survey Data

PHOTO
JOB NUMBER 999
NUMBER OF PHOTOGRAPHS= 2

DEGREES OF FREEDOM=******

UNIT STANDARD ERROR= 0.38906D+02

EXTERIOR RESULTS
EXTERIOR ORIENTATION

| PHOTO NO.11 | XO(METERS) 11.175 | YO(METERS) 42.233 | ZO(METERS) 267.704 | KAPPA(RAD) -0.813437D-01 | PHI(RAD) -0.266846D-01 | OMEGA(RAD) -0.648655D-01 |
|---|---|---|---|---|---|---|
| STD. ERROR | 0.2675D+01 | 0.2763D+01 | 0.1521D+01 | 0.7657D-04 | 0.1303D-01 | 0.1382D-01 |
| RESIDUALS | 0.38250D+01 | -0.12230D+02 | -0.1770D+02 | 0.8238D-01 | 0.2169D-01 | 0.6587D-01 |
| WEIGHTS | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| | | | | | | |
|---|---|---|---|---|---|---|
| 0.71552E+01 | 0.53970E-02 | 0.87135E+00 | -0.23352E-02 | 0.36228E-01 | 0.54660E-03 | |
| 0.53970E-02 | 0.76355E+01 | -0.91421E-01 | -0.60301E-02 | 0.38602E-03 | -0.37956E-01 | |
| 0.87135E+00 | -0.91421E-01 | 0.23130E+01 | -0.11476E-03 | 0.62887E-02 | 0.16416E-02 | |
| -0.23352E-02 | -0.60301E-02 | -0.11476E-03 | 0.58624E-04 | -0.10136E-04 | 0.22070E-04 | |
| 0.36228E-01 | 0.62887E-02 | 0.58624E-03 | -0.10136E-04 | 0.185/3E-03 | 0.16540E-05 | |
| 0.51600E-03 | -0.37956E-01 | 0.16416E-02 | 0.22070E-04 | 0.16540E-05 | 0.19107E-03 | |

| PHOTO NO.12 | XO(METERS) 65.274 | YO(METERS) 45.718 | ZO(METERS) 265.328 | KAPPA(RAD) -0.593741D-02 | PHI(RAD) -0.277751D-01 | OMEGA(RAD) -0.751790D-01 |
|---|---|---|---|---|---|---|
| STD. ERROR | 0.25510+01 | 0.26370D+01 | 0.14740D+01 | 0.7375D-04 | 0.1342D-01 | 0.1349D-01 |
| RESIDUALS | 0.8416D+01 | -0.15720D+02 | -0.15330D+02 | 0.6937D-02 | 0.2818D-01 | 0.7252D-01 |
| WEIGHTS | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| | | | | | | |
|---|---|---|---|---|---|---|
| 0.65100E+01 | -0.14868E+00 | -0.80496E+00 | -0.24833E-02 | 0.34575E-01 | 0.10006E-03 | |
| -0.14868E+00 | 0.69528E+01 | -0.18098E+00 | 0.28040E-02 | -0.10158E-02 | -0.35327E-01 | |
| -0.80490E+00 | -0.18098E+00 | 0.21717E+01 | 0.17368E-03 | -0.54841E-02 | 0.22742E-02 | |
| -0.24833E-02 | 0.28040E-02 | 0.17368E-03 | 0.54392E-04 | -0.10359E-04 | -0.66472E-05 | |
| 0.34575E-01 | -0.10158E-02 | -0.54392E-02 | -0.10359E-04 | 0.14066E-03 | 0.13805E-05 | |
| 0.10006E-03 | -0.35327E-01 | 0.22742E-02 | -0.66472E-05 | 0.13805E-05 | 0.18202E-03 | |

| X (cm) | Y (cm) | Z (cm) |
|---|---|---|
| 37.1122 | 22.2714 | 40.4316 |
| 37.0477 | 17.2565 | 46.0835 |
| 86.0732 | 10.3663 | 51.0790 |
| 85.0577 | 11.2024 | 52.7428 |
| 66.2820 | 11.5074 | 48.7113 |
| 69.0394 | 06.0382 | 55.7211 |
| 64.0497 | 06.5112 | 55.5769 |
| 21.0425 | 00.1173 | 57.3957 |
| 14.2940 | 14.4776 | 58.1107 |
| 17.0564 | 22.3124 | 66.1298 |

PHOTO RESULTS
PHOTO COORDINATES
ALL WEIGHTS TAKEN AS 1000.0

| Pt·No | Point | X (mm) | Y (mm) | Vx (mm) | Vy (mm) |
|---|---|---|---|---|---|
| 12 | 10 | -6.943 | 30.332 | -0.2458D+01 | -0.4710D+00 |
| 12 | 11 | -31.805 | 29.851 | -0.2862D+00 | -0.7137D+00 |
| 12 | 12 | -55.735 | 39.346 | 0.5239D+00 | 0.7703D+01 |
| 12 | 13 | -68.723 | 21.255 | 0.1155D+01 | -0.7004D+00 |
| 12 | 14 | -32.060 | 19.361 | 0.1465D-01 | -0.5214D+00 |
| 12 | 15 | -63.114 | -10.847 | -0.1122D-03 | 0.2608D-01 |
| 12 | 16 | -7.041 | -11.453 | -0.2111D-03 | 0.2000D+00 |
| 12 | 18 | -36.587 | 1.468 | 0.1162D-01 | -0.4231D+00 |
| 12 | 19 | -32.781 | 1.894 | 0.5668D-02 | -0.1455D+00 |
| 12 | 20 | -29.242 | 1.451 | 0.6019D-02 | -0.1461D+00 |
| 12 | 21 | -37.342 | -2.264 | 0.7326D-02 | -0.2191D+00 |
| 12 | 22 | -33.109 | -2.820 | 0.5706D-02 | -0.1270D+00 |
| 12 | 23 | -28.693 | -2.751 | 0.6355D-02 | -0.1300D+00 |
| 12 | 24 | -37.727 | -6.357 | 0.9545D-02 | -0.2044D+00 |
| 12 | 25 | -33.343 | -6.559 | 0.1647D-01 | -0.4214D+00 |
| 12 | 26 | -28.553 | -6.657 | 0.2440D-01 | -0.8535D+00 |
| 12 | 27 | -24.453 | -6.732 | 0.7468D-02 | -0.8797D-01 |
| 12 | 28 | -42.902 | -9.033 | 0.6299D-02 | -0.1280D+00 |
| 12 | 30 | -33.028 | -9.313 | 0.9126D-02 | -0.1892D+00 |
| 12 | 32 | -23.050 | -9.723 | -0.5033D-03 | 0.2043D+00 |
| 12 | 33 | -45.859 | -13.652 | 0.2441D-02 | -0.9083D-01 |
| 12 | 35 | -33.842 | -13.097 | -0.3185D-02 | 0.1945D+00 |
| 12 | 37 | -22.470 | -13.830 | 0.5866D-03 | 0.2186D+00 |
| 12 | 38 | -49.378 | -19.844 | 0.3696D-02 | -0.9391D-01 |
| 12 | 40 | -39.579 | -20.166 | -0.2777D-02 | 0.2677D-01 |
| 12 | 41 | -33.623 | -19.933 | -0.3756D-03 | 0.8965D-01 |
| 12 | 42 | -27.238 | -20.012 | -0.3736D-02 | 0.2000D+00 |
| 12 | 44 | -18.147 | -19.721 | 0.4549D-02 | 0.1595D+00 |
| 12 | 45 | -44.383 | -26.582 | 0.1968D-01 | -0.5885D+00 |
| 12 | 47 | -33.529 | -26.703 | 0.8379D-02 | -0.1179D+00 |
| 12 | 48 | -27.272 | -26.377 | 0.4123D-02 | 0.6077D-01 |
| 12 | 50 | -19.454 | -25.401 | 0.4445D-02 | 0.1243D+00 |
| 12 | 51 | -42.379 | -30.670 | -0.3678D-02 | 0.1299D+00 |
| 12 | 53 | -33.202 | -31.510 | 0.8281D-03 | 0.9486D-01 |
| 12 | 55 | -24.050 | -29.799 | 0.5250D-02 | 0.1293D+00 |
| 12 | 56 | -37.183 | -35.930 | 0.6660D-02 | -0.6720D-01 |
| 12 | 58 | -28.833 | -35.976 | 0.3251D-02 | 0.1397D+00 |

## RESULTS
### SURVEY COORDINATES

| POINT NO. 2 | X | Y | Z |
|---|---|---|---|
|  | 19.411 | 0.002 | 86.458 |
| STD. ERROR | 0.3377D+00 | 0.3398D+00 | 0.38420+00 |
| RESIDUALS | -0.8089D-01 | -0.8524D-03 | 0.2243D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

#### VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.11404E+00 | 0.35610E-03 | 0.41200E-02 |
| 0.35610E-03 | 0.11544E+00 | 0.87127E-02 |
| 0.41200E-02 | 0.87127E-02 | 0.14758E+00 |

| POINT NO. 3 | X | Y | Z |
|---|---|---|---|
|  | 17.830 | 12.210 | 48.588 |
| STD. ERROR | 0.3520D+00 | 0.3527D+00 | 0.3873D+00 |
| RESIDUALS | -0.9669D-02 | 0.1096D+00 | -0.5509D-02 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

#### VARIANCE/COVARIANCE MATRIX

| | | |
|---|---|---|
| 0.12389E+00 | 0.18957E-03 | 0.26959E-02 |
| 0.18957E-03 | 0.12442E+00 | 0.38722E-02 |
| 0.26959E-02 | 0.38722E-02 | 0.15000E+00 |

POINT NO. 4 X Y Z

|  | X | Y | Z |
|---|---|---|---|
|  | 8.674 | 8.367 | 51.899 |
| STD. ERROR | 0.35110+00 | 0.35190+00 | 0.38660+00 |
| RESIDUALS | -0.53600-01 | 0.17330+00 | -0.89960-02 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.12324E+00 | 0.29992E-03 | 0.39784E-02 |
|---|---|---|
| 0.29992E-03 | 0.12386E+00 | 0.44771E-02 |
| 0.39784E-02 | 0.44771E-02 | 0.14948E+00 |

POINT NO. 5 X Y Z

|  | X | Y | Z |
|---|---|---|---|
|  | 65.156 | -0.006 | 86.494 |
| STD. ERROR | 0.33880+00 | 0.34020+00 | 0.38390+00 |
| RESIDUALS | 0.73590-01 | 0.73020-02 | 0.56460-02 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.11478E+00 | -0.66914E-03 | -0.50594E-02 |
|---|---|---|
| -0.66914E-03 | 0.11576E+00 | 0.85906E-02 |
| -0.50594E-02 | 0.85906E-02 | 0.14740E+00 |

POINT NO. 7 X Y Z

|  | X | Y | Z |
|---|---|---|---|
|  | 76.477 | 8.063 | 52.150 |
| STD. ERROR | 0.35200+00 | 0.35240+00 | 0.38640+00 |
| RESIDUALS | -0.17730+00 | 0.87410-01 | -0.49800-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.12391E+00 | -0.44698E-03 | -0.46573E-02 |
|---|---|---|
| -0.44698E-03 | 0.12415E+00 | 0.44439E-02 |
| -0.46573E-02 | 0.44439E-02 | 0.14928E+00 |

POINT NO. 8 X Y Z

|  | X | Y | Z |
|---|---|---|---|
|  | 59.282 | 11.687 | 48.014 |
| STD. ERROR | 0.35290+00 | 0.35330+00 | 0.38700+00 |
| RESIDUALS | -0.72070-01 | 0.11260+00 | -0.34320-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

```
        0.12457E+00    -0.33040E-03    -0.36034E-02
       -0.33040E-03     0.12481E+00     0.38447E-02
       -0.36034E-02     0.38447E-02     0.14980E+00
```

POINT NO. 9            X               Y                Z
                     59.615          50.035           88.431
STD. ERROR           0.3375D+00      0.3364D+00       0.3851D+00
RESIDUALS            0.1851D+00      0.9490D-01       0.1860D-01
WEIGHTS              10000.000       10000.000        10000.000

              VARIANCE/COVARIANCE MATRIX
        0.11388E+00    -0.18463E-03    -0.62767E-02
       -0.18463E-03     0.11317E+00    -0.13692E-02
       -0.62767E-02    -0.13692E-02     0.14909E+00


POINT NO. 10           X               Y                Z
                     68.035          58.638           57.147
STD. ERROR           0.3492D+00      0.3485D+00       0.3874D+00
RESIDUALS            0.4747D+00      0.8178D-01       0.6285D-01
WEIGHTS              10000.000       10000.000        10000.000

              VARIANCE/COVARIANCE MATRIX
        0.12196E+00    -0.75358E-04    -0.39992E-02
       -0.75358E-04     0.12142E+00    -0.21274E-02
       -0.39992E-02    -0.21274E-02     0.15005E+00


POINT NO. 11           X               Y                Z
                     43.647          58.531           55.576
STD. ERROR           0.3492D+00      0.3488D+00       0.3851D+00
RESIDUALS            0.3270D-02      0.2851D-01       -0.5952D-02
WEIGHTS              10000.000       10000.000        10000.000

              VARIANCE/COVARIANCE MATRIX
        0.12194E+00     0.64830E-04    -0.50870E-03
        0.64830E-04     0.12164E+00    -0.20713E-02
       -0.50870E-03    -0.20713E-02     0.15059E+00


POINT NO. 12           X               Y                Z
```

|  | 21.862 | 59.417 | 57.396 |
|---|---|---|---|
| STD. ERROR | 0.3483D+00 | 0.3480D+00 | 0.3877D+00 |
| RESIDUALS | -0.1023D+00 | -0.7873D+00 | -0.4571D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.12131E+00 | 0.19471E-03 | 0.25487E-02 |
|---|---|---|
| 0.19471E-03 | 0.12108E+00 | -0.22761E-02 |
| 0.25487E-02 | -0.22761E-02 | 0.15033E+00 |

POINT NO. 13 | X | Y | Z

|  | 18.491 | 50.047 | 90.059 |
|---|---|---|---|
| STD. ERROR | 0.3353D+00 | 0.3350D+00 | 0.3806D+00 |
| RESIDUALS | -0.2408D+00 | 0.9269D-01 | 0.4070D-01 |
| WEIGHTS | 10000.000 | 10000.000 | 10000.000 |

VARIANCE/COVARIANCE MATRIX

| 0.11244E+00 | 0.28073E-03 | 0.46526E-02 |
|---|---|---|
| 0.28073E-03 | 0.11225E+00 | -0.14263E-02 |
| 0.46526E-02 | -0.14263E-02 | 0.14948E+00 |

POINT NO. 14 | X | Y | Z

|  | 43.294 | 48.878 | 58.111 |
|---|---|---|---|
| STD. ERROR | 0.7921D+00 | 0.7954D+00 | 0.5932D+01 |
| RESIDUALS | 0.5712D-02 | -0.5599D-02 | 0.3893D+00 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.62748E+00 | 0.16489E-01 | -0.63720E+00 |
|---|---|---|
| 0.16489E-01 | 0.63263E+00 | -0.86337E+00 |
| -0.63720E+00 | -0.86337E+00 | 0.35189E+02 |

POINT NO. 15 | X | Y | Z

|  | 17.057 | 22.342 | 66.130 |
|---|---|---|---|
| STD. ERROR | 0.9748D+00 | 0.9511D+00 | 0.5469D+01 |
| RESIDUALS | -0.2268D+00 | -0.1924D+00 | -0.3298D+00 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.95019E+00 | 0.36322E+00 | 0.33609E+01 |
|---|---|---|

```
        0.36322E+00      0.92368E+00      0.31957E+01
        0.33609E+01      0.31957E+01      0.29912E+02
```

POINT NO. 16              X                Y                Z
                        65.600           23.395           83.1/6
STD. ERROR            0.9663D+00       0.8742D+00       0.4680D+01
RESIDUALS           -0.9531D-04       0.1171D-01       0.3240D+00
WEIGHTS                0.000            0.000            0.000

              VARIANCE/COVARIANCE MATRIX
        0.93366E+00     -0.35081E+00     -0.31128E+01
       -0.35081E+00      0.76418E+00      0.24332E+01
       -0.31128E+01      0.24332E+01      0.21905E+02


POINT NO. 18              X                Y                Z
                        41.392           33.901           76.165
STD. ERROR            0.7218D+00       0.7660D+00       0.4969D+01
RESIDUALS            -0.4103D+02      -0.3354D+02      -0.7580D+02
WEIGHTS                0.000            0.000            0.000

              VARIANCE/COVARIANCE MATRIX
        0.52097E+00     -0.12076E-01     -0.23515E+00
       -0.12076E-01      0.58671E+00      0.12777E+01
       -0.23515E+00      0.12777E+01      0.24695E+02


POINT NO. 19              X                Y                Z
                        44.542           34.022           76.454
STD. ERROR            0.7314D+00       0.7642D+00       0.4962D+01
RESIDUALS            -0.4418D+02      -0.3366D+02      -0.7607D+02
WEIGHTS                0.000            0.000            0.000

              VARIANCE/COVARIANCE MATRIX
        0.53468E+00     -0.33433E-01     -0.64362E+00
       -0.33433E-01      0.58399E+00      0.12604E+01
       -0.64362E+00      0.12604E+01      0.24625E+02


POINT NO. 20              X                Y                Z
                        47.278           33.553           74.907
```

```
STD. ERROR          0.7541D+00          0.7751D+00          0.5049D+01
RESIDUALS          -0.4692D+02         -0.3319D+02         -0.7455D+02
WEIGHTS                  0.000               0.000               0.000
```

### VARIANCE/COVARIANCE MATRIX

```
0.56862E+00    -0.55700E-01    -0.10267E+01
-0.55700E-01     0.60077E+00     0.13574E+01
-0.10267E+01     0.13574E+01     0.25494E+02
```

```
POINT NO. 21            X                   Y                   Z
                     30.771              30.690              76.484
STD. ERROR          0.7204D+00          0.7983D+00          0.4957D+01
RESIDUALS          -0.4041D+02         -0.3033D+02         -0.7612D+02
WEIGHTS                  0.000               0.000               0.000
```

### VARIANCE/COVARIANCE MATRIX

```
0.51900E+00    -0.10605E-01    -0.15423E+00
-0.10605E-01     0.63724E+00     0.16886E+01
-0.15423E+00     0.16886E+01     0.24569E+02
```

```
POINT NO. 22            X                   Y                   Z
                     44.388              30.249              77.675
STD. ERROR          0.7261D+00          0.7982D+00          0.4893D+01
RESIDUALS          -0.4403D+02         -0.2989D+02         -0.7752D+02
WEIGHTS                  0.000               0.000               0.000
```

### VARIANCE/COVARIANCE MATRIX

```
0.52718E+00    -0.44423E-01    -0.61072E+00
-0.44423E-01     0.63711E+00     0.17138E+01
-0.61072E+00     0.17138E+01     0.23945E+02
```

```
POINT NO. 23            X                   Y                   Z
                     47.810              30.146              76.179
STD. ERROR          0.7540D+00          0.8071D+00          0.4989D+01
RESIDUALS          -0.4745D+02         -0.2979D+02         -0.7582D+02
WEIGHTS                  0.000               0.000               0.000
```

### VARIANCE/COVARIANCE MATRIX

```
0.56848E+00    -0.78490E-01    -0.10787E+01
-0.78490E-01     0.65144E+00     0.17799E+01
-0.10787E+01     0.17799E+01     0.24894E+02
```

POINT NO. 24         X                Y                Z
                  39.139           26.409           67.269
STD. ERROR        0.7554D+00       0.8950D+00       0.5452D+01
RESIDUALS        -0.38890+02      -0.3209D+01      -0.6691D+02
WEIGHTS           0.000            0.000            0.000

          VARIANCE/COVARIANCE MATRIX
     0.57062E+00      0.52466E-02      0.59598E-01
     0.52466E-02      0.80101E+00      0.25882E+01
     0.59598E-01      0.25882E+01      0.29719E+02


POINT NO. 25         X                Y                Z
                  42.648           26.182           65.166
STD. ERROR        0.7688D+00       0.9085D+00       0.5576D+01
RESIDUALS        -0.4240D+02       0.3012D+02      -0.4157D+02
WEIGHTS           0.000            0.000            0.000

          VARIANCE/COVARIANCE MATRIX
     0.59110E+00     -0.42774E-01     -0.48240E+00
    -0.42774E-01      0.82541E+00      0.27147E+01
    -0.48240E+00      0.27147E+01      0.31089E+02


POINT NO. 26         X                Y                Z
                  46.759           26.411           64.695
STD. ERROR        0.7924D+00       0.9079D+00       0.5611D+01
RESIDUALS        -0.4640D+02      -0.25050+02      -0.6434D+02
WEIGHTS           0.000            0.000            0.000

          VARIANCE/COVARIANCE MATRIX
     0.62795E+00     -0.98652E-01     -0.11302E+01
    -0.98652E-01      0.82434E+00      0.27077E+01
    -0.11302E+01      0.27077E+01      0.31485E+02


POINT NO. 27         X                Y                Z
                  50.501           25.855           65.752
STD. ERROR        0.8177D+00       0.9080D+00       0.5508D+01
RESIDUALS        -0.2520D+02      -0.5515D+00      -0.4145D+02

WEIGHTS 0.000 0.000 0.000

VARIANCE/COVARIANCE MATRIX

| 0.66857E+00 | -0.15183E+00 | -0.16683E+01 |
| -0.15183E+00 | 0.82450E+00 | 0.27201E+01 |
| -0.16683E+01 | 0.27201E+01 | 0.30334E+02 |

| POINT NO. 28 | X | Y | Z |
|---|---|---|---|
|  | 36.650 | 25.417 | 79.711 |
| STD. ERROR | 0.71220+00 | 0.85320+00 | 0.47900+01 |
| RESIDUALS | -0.14400+02 | 0.18330+00 | -0.54110+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.50722E+00 | 0.35885E-01 | 0.36163E+00 |
| 0.35885E-01 | 0.72800E+00 | 0.22510E+01 |
| 0.36163E+00 | -0.22510E+01 | 0.22942E+02 |

| POINT NO. 30 | X | Y | Z |
|---|---|---|---|
|  | 44.411 | 25.468 | 82.257 |
| STD. ERROR | 0.71060+00 | 0.84250+00 | 0.46170+01 |
| RESIDUALS | -0.20810+02 | -0.18680+01 | -0.58660+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.50494E+00 | -0.57810E-01 | -0.57240E+00 |
| -0.57810E-01 | 0.70982E+00 | 0.21702E+01 |
| -0.57240E+00 | 0.21702E+01 | 0.21876E+02 |

| POINT NO. 32 | X | Y | Z |
|---|---|---|---|
|  | 52.674 | 24.480 | 80.186 |
| STD. ERROR | 0.78590+00 | 0.85840+00 | 0.48020+01 |
| RESIDUALS | -0.16170+02 | 0.81200+01 | -0.56590+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.61705E+00 | -0.17050E+00 | -0.16228E+01 |
| -0.17050E+00 | 0.75415E+00 | 0.23856E+01 |
| -0.16228E+01 | 0.23856E+01 | 0.23061E+02 |

POINT NO. 33       X         Y         Z

|  | X | Y | Z |
|---|---|---|---|
|  | 34.688 | 22.009 | 82.485 |
| STD. ERROR | 0.7092D+00 | 0.8923D+00 | 0.4650D+01 |
| RESIDUALS | -0.9388D+01 | -0.9709D+01 | -0.6818D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.50299E+00 | 0.68788E-01 | 0.57800E+00 |
|---|---|---|
| 0.68788E-01 | 0.79618E+00 | 0.25536E+01 |
| 0.57800E+00 | 0.25536E+01 | 0.21624E+02 |


POINT NO. 35       X         Y         Z

|  | X | Y | Z |
|---|---|---|---|
|  | 44.622 | 22.572 | 85.735 |
| STD. ERROR | 0.6989D+00 | 0.8701D+00 | 0.4508D+01 |
| RESIDUALS | -0.1902D+02 | 0.1028D+01 | -0.7344D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.48852E+00 | -0.67335E-01 | -0.56435E+00 |
|---|---|---|
| -0.67335E-01 | 0.75713E+00 | 0.23800E+01 |
| -0.56435E+00 | 0.23800E+01 | 0.20322E+02 |


POINT NO. 37       X         Y         Z

|  | X | Y | Z |
|---|---|---|---|
|  | 53.282 | 21.503 | 82.686 |
| STD. ERROR | 0.7832D+00 | 0.9041D+00 | 0.4681D+01 |
| RESIDUALS | -0.1698D+02 | 0.1480D+02 | -0.4639D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.61336E+00 | -0.20079E+00 | -0.16348E+01 |
|---|---|---|
| -0.20079E+00 | 0.81736E+00 | 0.26524E+01 |
| -0.16348E+01 | 0.26524E+01 | 0.21914E+02 |


POINT NO. 38       X         Y         Z

|  | X | Y | Z |
|---|---|---|---|
|  | 31.431 | 16.751 | 80.500 |
| STD. ERROR | 0.7367D+00 | 0.9921D+00 | 0.4752D+01 |
| RESIDUALS | 0.4869D+01 | 0.1955D+02 | -0.4420D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

### VARIANCE/COVARIANCE MATRIX

| 0.54268E+00 | 0.14472E+00 | 0.99166E+00 |
| 0.14472E+00 | 0.98422E+00 | 0.32772E+01 |
| 0.99166E+00 | 0.32772E+01 | 0.22583E+02 |

| POINT NO. 40 | X | Y | Z |
|---|---|---|---|
| | 40.120 | 17.223 | 86.150 |
| STD. ERROR | 0.6868D+00 | 0.9564D+00 | 0.4466D+01 |
| RESIDUALS | 0.5189D+01 | -0.1923D+01 | -0.7385D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

### VARIANCE/COVARIANCE MATRIX

| 0.47163E+00 | -0.91944E-02 | -0.57294E-01 |
| -0.91944E-02 | 0.91464E+00 | 0.29593E+01 |
| -0.57294E-01 | 0.29593E+01 | 0.20127E+02 |

| POINT NO. 41 | X | Y | Z |
|---|---|---|---|
| | 44.846 | 17.427 | 86.832 |
| STD. ERROR | 0.6972D+00 | 0.9506D+00 | 0.4462D+01 |
| RESIDUALS | 0.1145D+02 | 0.5673D+01 | -0.8647D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

### VARIANCE/COVARIANCE MATRIX

| 0.48602E+00 | -0.86760E-01 | -0.58135E+00 |
| -0.86760E-01 | 0.90361E+00 | 0.29165E+01 |
| -0.58135E+00 | 0.29165E+01 | 0.19912E+02 |

| POINT NO. 42 | X | Y | Z |
|---|---|---|---|
| | 49.684 | 16.961 | 85.439 |
| STD. ERROR | 0.7361D+00 | 0.9676D+00 | 0.4542D+01 |
| RESIDUALS | -0.4932D+02 | -0.1660D+02 | -0.8508D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

### VARIANCE/COVARIANCE MATRIX

| 0.54188E+00 | -0.17282E+00 | -0.11511E+01 |
| -0.17282E+00 | 0.93625E+00 | 0.30526E+01 |
| -0.11511E+01 | 0.30526E+01 | 0.20634E+02 |

POINT NO. 44        X        Y        Z

|  | X | Y | Z |
|---|---|---|---|
|  | 56.511 | 16.282 | 79.557 |
| STD. ERROR | 0.83980D+00 | 0.10130D+01 | 0.48580+01 |
| RESIDUALS | -0.5615D+02 | -0.1592D+02 | -0.7918D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.70532E+00 | -0.31863E+00 | -0.21414E+01 |
|---|---|---|
| -0.31863E+00 | 0.10271E+01 | 0.34677E+01 |
| -0.21414E+01 | 0.34677E+01 | 0.23596E+02 |

POINT NO. 45        X        Y        Z

|  | X | Y | Z |
|---|---|---|---|
|  | 33.604 | 9.720 | 70.160 |
| STD. ERROR | 0.76480D+00 | 0.11910D+01 | 0.53110+01 |
| RESIDUALS | -0.3324D+02 | -0.9360D+01 | -0.6980D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.58487E+00 | 0.14787E+00 | 0.85301E+00 |
|---|---|---|
| 0.14787E+00 | 0.14191E+01 | 0.48894E+01 |
| 0.85301E+00 | 0.48894E+01 | 0.28204E+02 |

POINT NO. 47        X        Y        Z

|  | X | Y | Z |
|---|---|---|---|
|  | 42.745 | 8.984 | 69.409 |
| STD. ERROR | 0.75750D+00 | 0.12150D+01 | 0.53740+01 |
| RESIDUALS | -0.4238D+02 | -0.8624D+01 | -0.69050D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.57383E+00 | -0.85234E-01 | -0.47241E+00 |
|---|---|---|
| -0.85234E-01 | 0.14768E+01 | 0.50958E+01 |
| -0.47241E+00 | 0.50958E+01 | 0.28877E+02 |

POINT NO. 48        X        Y        Z

|  | X | Y | Z |
|---|---|---|---|
|  | 47.942 | 8.739 | 67.677 |
| STD. ERROR | 0.79470D+00 | 0.12330D+01 | 0.54810+01 |
| RESIDUALS | -0.4758D+02 | -0.8379D+01 | -0.6732D+02 |
| WEIGHTS | 0.000 | 0.000 | 0.000 |

VARIANCE/COVARIANCE MATRIX

| 0.63162E+00 | -0.22755E+00 | -0.12748E+01 |
|---|---|---|

```
-0.22755E+00     0.15209E+01     0.52922E+01
-0.12748E+01     0.52922E+01     0.30038E+02
```

POINT NO. 50 .          X                Y                Z
                      54.955           10.248           71.894
STD. ERROR        0.8542D+00        0.1178D+01       0.5266D+01
RESIDUALS        -0.5450D+02       -0.9888D+01      -0.7152D+02
WEIGHTS              0.000            0.000            0.000

            VARIANCE/COVARIANCE MATRIX
         0.72970E+00    -0.38332E+00    -0.22014E+01
        -0.38332E+00     0.13870E+01     0.47770E+01
        -0.22014E+01     0.47770E+01     0.27735E+02


POINT NO. 51           X                Y                Z
                      36.752            7.490           79.576
STD. ERROR        0.7170D+00        0.1182D+01       0.4826D+01
RESIDUALS        -0.3639D+02       -0.7130D+01      -0.7924D+02
WEIGHTS              0.000            0.000            0.000

            VARIANCE/COVARIANCE MATRIX
         0.51415E+00     0.67394E-01     0.35145E+00
         0.67394E-01     0.13977E+01     0.45181E+01
         0.35145E+00     0.45181E+01     0.23292E+02


POINT NO. 53           X                Y                Z
                      44.453            7.237           81.878
STD. ERROR        0.7171D+00        0.1176D+01       0.4726D+01
RESIDUALS        -0.1409D+02       -0.6877D+01      -0.8152D+02
WEIGHTS              0.000            0.000            0.000

            VARIANCE/COVARIANCE MATRIX
         0.51425E+00    -0.11914E+00    -0.59106E+00
        -0.11914E+00     0.13836E+01     0.44171E+01
        -0.59106E+00     0.44171E+01     0.22333E+02


POINT NO. 55           X                Y                Z
                      51.572            7.918           76.651
```

```
STD. ERROR        0.7842D+00        0.1184D+01        0.4896D+01
RESIDUALS        -0.5121D+02       -0.7558D+01       -0.7645D+02
WEIGHTS               0.000             0.000             0.000

              VARIANCE/COVARIANCE MATRIX
        0.61502E+00      -0.29708E+00      -0.15367E+01
       -0.29708E+00       0.14012E+01       0.45777E+01
       -0.15367E+01       0.45777E+01       0.23967E+02
```

```
POINT NO. 56          X                 Y                 Z
                    40.116            1.978            73.943
STD. ERROR        0.7369D+00        0.1342D+01        0.5138D+01
RESIDUALS        -0.3976D+02       -0.1618D+01       -0.7356D+02
WEIGHTS               0.000             0.000             0.000

              VARIANCE/COVARIANCE MATRIX
        0.54296E+00      -0.19089E-01      -0.79615E-01
       -0.19089E-01       0.17996E+01       0.57268E+01
       -0.79615E-01       0.57268E+01       0.26396E+02
```

```
POINT NO. 58          X                 Y                 Z
                    47.095            1.652            73.757
STD. ERROR        0.7660D+00        0.1353D+01        0.5163D+01
RESIDUALS        -0.4673D+02       -0.1292D+01       -0.7340D+02
WEIGHTS               0.000             0.000             0.000

              VARIANCE/COVARIANCE MATRIX
        0.58680E+00      -0.23204E+00      -0.10474E+01
       -0.23204E+00       0.18317E+01       0.58238E+01
       -0.10474E+01       0.58238E+01       0.26655E+02
```

APPENDIX C

## C-1 COLLINEARITY CONDITION EQUATIONS AND THEIR APPLICATION IN BUNDLE ADJUSTMENT

In article III-3 the basic collinearity conditions equations are given and in V-2.4, some details of the linearised form of these equations are given. This article is intended to give more details about the same. For convenience the equations are rewritten here

$$x_o = -f \left[ \frac{m_{11}(X_A - X_L) + m_{12}(Y_A - Y_L) + m_{13}(Z_A - Z_L)}{m_{31}(X_A - X_L) + m_{32}(Y_A - Y_L) + m_{33}(Z_A - Z_L)} \right] \quad (C-1.1)$$

$$Y_a = -f \left[ \frac{m_{21}(X_A - X_L) + m_{22}(Y_A - Y_L) + m_{23}(Z_A - Z_L)}{m_{31}(X_A - X_L) + m_{32}(Y_A - Y_L) + m_{33}(Z_A - Z_L)} \right] \quad (C-1.2)$$

where

$$x_a, Y_a = \text{photo-coordinates of the image points}$$

$$X_A, Y_A, Z_A = \text{ground-coordinates of the point A}$$

$$X_L, Y_L, Z_L = \text{ground-coordinates of the exposure station}$$

$$f = \text{camera constant or calibrated focal length}$$

$$m_{11} = \text{Cos} \phi \cdot \text{Cos k}$$

$$m_{12} = \sin w \, \sin \phi \, \cos k + \cos w \, \sin k$$

$$m_{13} = -\cos w \, \sin \phi \, \cos k + \sin w \, \sin k$$

$$m_{21} = -\cos \phi \, \sin k$$

$$m_{22} = -\sin w \, \sin \phi \, \sin k + \cos w \, \cos k$$

$$m_{23} = \cos w \, \sin \phi \, \sin k + \sin w \, \cos k$$

$$m_{31} = \sin \phi$$

$$m_{32} = -\sin w \, \cos \phi$$

$$m_{33} = \cos w \, \cos \phi$$

k = rotation about Z axis (kappa)

w = rotation about X axis (omega)

$\emptyset$ = rotation about Y axis (Phi)

The above collinearity equations (C-1.1) and (C-1.2) are nonlinear and they have nine unknowns; the three rotation elements omega, phi and kappa (inherent in m's), the three exposure station coordinates $X_L$, $Y_L$ and $Z_L$; the three object point coordinates $X_A$, $Y_A$ and $Z_A$. To be used in least square methods the above equations are to be linearised using Taylor's theorem.

Equations (C-1.1) and (C-1.2) may be written as

$$F = 0 = q\, x_a + rf \tag{C-1.3}$$

$$G = 0 = q\, y_a + sf \tag{C-1.4}$$

where

$$q = m_{31}(X_A - X_L) + m_{32}(Y_A - Y_L) + m_{33}(Z_A - Z_L)$$

$$r = m_{11}(X_A - X_L) + m_{12}(Y_A - Y_L) + m_{13}(Z_A - Z_L)$$

$$s = m_{21}(X_A - X_L) + m_{22}(Y_A - Y_L) + m_{23}(Z_A - Z_L)$$

By Taylor's theorem equations (C-1.3) and (C-1.4) may be written as

$$0 = (F)_o + \left(\frac{\partial F}{\partial x_a}\right)_o \, dx_p + \left(\frac{\partial F}{\partial w}\right)_o \, dw + \left(\frac{\partial F}{\partial \emptyset}\right)_o \, d\emptyset$$

$$+ \left(\frac{\partial F}{\partial k}\right)_o \, dk + \left(\frac{\partial F}{\partial X_L}\right)_o \, dX_L + \left(\frac{\partial F}{\partial Y_L}\right)_o \, dY_L$$

$$+ \left(\frac{\partial F}{\partial Z_L}\right)_o \, dZ_L + \left(\frac{\partial F}{\partial X_A}\right)_o \, dX_A + \left(\frac{\partial F}{\partial Y_A}\right)_o \, dY_A$$

$$+ \left(\frac{\partial F}{\partial Z_A}\right)_o \, dZ_A \qquad\qquad\qquad \text{(C-1.5)}$$

$$0 = (G)_o + \left(\frac{\partial G}{\partial y_a}\right)_o \, dy_a + \left(\frac{\partial G}{\partial g}\right)_o \, dw + \left(\frac{\partial G}{\partial \emptyset}\right)_o \, d\emptyset$$

$$+ \left(\frac{\partial G}{\partial k}\right)_k \, dk + \left(\frac{\partial G}{\partial X_L}\right)_o \, dX_L + \left(\frac{\partial G}{\partial Y_L}\right)_o \, dY_L$$

$$+ \left(\frac{\partial G}{\partial Z_L}\right)_o \, dZ_L + \left(\frac{\partial G}{\partial X_A}\right)_o \, dX_A + \left(\frac{\partial G}{\partial Y_A}\right)_o \, dY_A$$

$$+ \left(\frac{\partial G}{\partial Z_A}\right)_o \, dZ_A \qquad\qquad\qquad \text{(C-1.6)}$$

In the above equations $(F)_o$ and $(G)_o$ are the functions F and G of equations (C-1.3) and (C-1.4) evaluated at the initial approximations for the nine unknowns; the terms $\left(\partial F/\partial x_a\right)_o$, $\left(\partial F/\partial w\right)_o$, $\left(\partial F/\partial \emptyset\right)_o$ are the partial derivatives of the functions F and G with respect to the indicated unknowns evaluated at the initial approximations; and dw, dk, d∅, etc. are the unknown corrections to be applied to the initial approximations. The units of dw, d∅ and dk are radians. Since $dx_a$ and $dy_a$ are the corrections to the measured photo-coordinates $x_a$ and $y_a$,

they may be considered as the residual errors in measurements. Hence these two terms may be replaced by $v_{x_a}$ and $v_{y_a}$ which are the usual notations for residual errors. $\partial F/\partial x_a$ and $\partial G/\partial y_a$ are equal to q. Substituting q, for these terms in the equations (C-1.5) and (C-1.6), transposing $q dx_a$ and $q dy_a$ to the left hand side of the equations, dividing each equation by q and replacing $dx_a$ and $dy_a$ by $v_{x_a}$ and $v_{y_a}$

$$v_{x_a} = b_{11}(dw) + b_{12}(d\emptyset) + b_{13}(dk) - b_{14}(dX_L)$$
$$- b_{15}(dY_L) - b_{16}(dZ_L) + b_{14}(dX_A)$$
$$+ b_{15}(dY_A) + b_{16}(dZ_A) + J \qquad\qquad (C-1.7)$$

$$v_{y_a} = b_{21}(dw) + b_{22}(d\emptyset) + b_{23}(dk) - b_{24}(dX_L)$$
$$- b_{25}(dY_L) - b_{26}(dZ_L) + b_{24}(dX_A)$$
$$+ b_{25}(dY_A) + b_{26}(dZ_A) + K \qquad\qquad (C-1.8)$$

which are nothing but the basic observation equations used in Bundle Adjustment method.

In the above equations (C-1.7) and (C-1.8)

$$J = (F)_o/q$$
$$K = (G)_o/q$$
$$b_{11} = \frac{x}{q}(-m_{33}\Delta Y + m_{32}\Delta Z) + \frac{1}{q}(m_{13}\Delta Y + m_{12}\Delta Z)$$

$$b_{12} = \frac{x}{q} \left[ \Delta X \cos\emptyset + \Delta Y (\sin w \cdot \sin\emptyset) + \Delta Z (-\sin\emptyset \cos w) \right]$$

$$+ \frac{f}{q} \left[ \Delta X (-\sin\emptyset \cos k) + \Delta Y (\sin w \cos\emptyset \cos k) \right.$$

$$\left. + \Delta Z (-\cos w \cdot \cos\emptyset \cos k) \right]$$

$$b_{13} = \frac{f}{q} (m_{21} \Delta X + m_{22} \Delta Y + m_{23} \Delta Z)$$

$$b_{14} = \frac{x}{q} (m_{31}) + \frac{f}{q} (m_{11})$$

$$b_{15} = \frac{x}{q} (m_{32}) + \frac{f}{q} (m_{12})$$

$$b_{16} = \frac{x}{q} (m_{33}) + \frac{f}{q} (m_{13})$$

$$J = \frac{(\alpha x + rf)}{q}$$

$$b_{21} = \frac{y}{q} (-m_{33} \Delta Y + m_{32} \Delta Z)$$

$$+ \frac{f}{q} (- m_{23} \Delta Y + m_{22} \Delta Z)$$

$$b_{22} = \frac{y}{q} \left[ \Delta X \cos\emptyset + \Delta Y (\sin w \sin\emptyset) \right.$$

$$+ \Delta Z (-\cos w \sin\emptyset) \right]$$

$$+ \frac{f}{q} \left[ \Delta X (\sin\emptyset \cdot \sin k) + \Delta Y (-\sin w \cos\emptyset \sin k) \right.$$

$$\left. + \Delta Z (\cos w \cos\emptyset \sin k) \right]$$

$$b_{23} = \frac{f}{q} (-m_{11} \Delta X - m_{12} \Delta Y - m_{13} \Delta Z)$$

$$b_{24} = \frac{y}{q}(m_{31}) + \frac{f}{q}(m_{21})$$

$$b_{25} = \frac{y}{q}(m_{32}) + \frac{f}{q}(m_{22})$$

$$b_{26} = \frac{y}{q}(m_{33}) + \frac{f}{q}(m_{23})$$

$$K = \frac{(qy + sf)}{q} .$$

Thus an initial approximations for all the quantities are needed. In the first step the corrections are computed for these parameters and are applied to give more retined values of the parameters. Thus the procedure continues until the corrections become negligible.

## C-? PERPENDICULARITY OF THE FIDUCIAL AXES

With reference to Fig. IV-1, table C-2 gives the comparator/autograph A-8 coordinates obtained by measuring of 35 mm film negative and enlarged photographs of the target field respectively.

### 35 mm FILM NEGATIVE:

Co-ordinates of the LBC (mm) = 95.22 and 85.165

Co-ordinates of the RBC (mm) = 131.615 and 84.97

Straight line equation fitting the bottom edge

$$y - 84.97 = \left[\frac{85.165 - 84.97}{95.22 - 131.615}\right] (x-131.615)$$

$$y = -0.00535788 \ x + 131.32$$

Co-ordinates of the LBC (mm) = 95.22 and 85.165

Co-ordinates of the LTC (mm) = 95.32 and 109.515

Straight line equation fitting the left edge

$$y - 85.165 = \left[\frac{109.515 - 85.165}{95.32 - 95.22}\right](x-95.22)$$

$$y = 243.5 \ x - 23100.905$$

$$\therefore \text{Slope } m_1 = -0.00535788$$

$$\text{Slope } m_2 = 243.5$$

| Point | 35 mm Film Negative (Comparator) | | Enlarged Photograph (Autograph) | |
|-------|--------|--------|--------|--------|
| | x(mm) | y(mm) | x(mm) | y(mm) |
| LBC | 95.22 | 85.165 | 0.705 | 10.99 |
| LTC | 95.32 | 109.515 | -3.11 | 121.20 |
| RTC | 131.825 | 109.275 | 160.08 | 125.73 |
| RBC | 131.615 | 84.97 | 164.75 | 16.96 |
| A | 98.26 | 87.13 | 14.29 | 19.835 |
| B | 101.290 | 89.145 | 27.675 | 29.95 |
| C | 104.370 | 91.145 | 41.51 | 39.72 |
| D | 107.440 | 93.165 | 55.03 | 49.39 |
| E | 110.510 | 95.210 | 68.57 | 59.54 |
| F | 113.550 | 97.250 | 82.205 | 69.27 |
| G | 116.650 | 99.270 | 95.48 | 78.895 |
| H | 119.755 | 101.320 | 108.705 | 88.630 |
| I | 122.765 | 103.300 | 121.48 | 98.065 |
| J | 125.760 | 105.280 | 134.55 | 107.44 |
| K | 128.670 | 107.200 | 147.02 | 116.645 |
| L | 128.645 | 87.100 | 151.48 | 26.20 |
| M | 125.660 | 89.080 | 137.88 | 34.44 |
| N | 122.710 | 91.090 | 124.20 | 43.035 |
| O | 119.660 | 93.130 | 110.25 | 51.610 |
| P | 116.610 | 95.190 | 96.25 | 60.645 |
| Q | 113.550 | 97.250 | 68.015 | 78.050 |
| R | 110.500 | 99.305 | 54.015 | 86.585 |
| S | 107.430 | 101.360 | 40.14 | 95.23 |
| T | 104.440 | 103.390 | 26.25 | 104.02 |
| U | 101.410 | 107.405 | 12.73 | 112.575 |

TABLE C-2 : MEASURED COMPARATOR/AUTOGRAPH A-8 COORDINATES OF TARGET POINT IMAGES (FRAME 18).

. . Angle between the left and bottom edges

$$\alpha = \tan^{-1} \left[ \frac{m_1 - m_2}{1 + m_1 m_2} \right]$$

$$\alpha = \tan^{-1} \left[ \frac{-0.00535788 - 243.5}{1 + (-0.00535788)(243.5)} \right]$$

$$= 89° \ 55' \ 42''$$  (C-2.1)

ENLARGED PHOTOGRAPH:

Co-ordinates of LBC (mm) = 0.705, 10.99

Co-ordinates of RBC (mm) = 164.715, 16.96

Straight line equation fitting the bottom edge

$$y - 16.96 \left[ \frac{10.99 - 16.96}{0.705 - 164.715} \right] (x - 164.715)$$

$$y = 0.0364002 + 10.964$$

Co-ordinates of LBC (mm) = 0.705 and 10.99

Co-ordinates of LTC (mm) = -3.11 and 121.20

$$y - 10.99 \left[ \frac{121.201 - 10.991}{-3.11 - 0.705} \right] (x - 0.705)$$

$$y = -28.78859764x + 36.56$$

$$\alpha = \tan^{-1} \left[ \frac{0.03640022 + 28.78859764}{1 + (0.03640022)(-28.78859764)} \right]$$

$$\alpha = 89° \ 54' \ 17''$$  (C-2.2)

The angles obtained vide equations, (C-1.1) and (C-2.2)
establish both in the case of 35 mm negative and its enlarged
print that the edges of the exposed photographs are perpendicu-
lar to each other. Thus this establishes within acceptable
limits the perpendicularity of the Fiducial axes.